




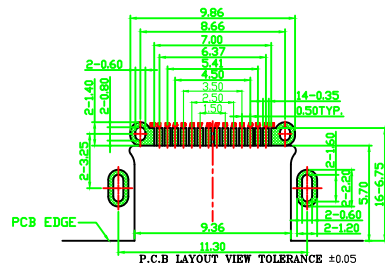






REV.	ECN. NO.	DESCRIPTION	ENG	DATE
A				



- NOTES:
SPECIFICATION:
1. CURRENT RATING: 8.0A MAX
 2. VOLTAGE: 100 VAC
 3. TEMPERATURE RANGE: -30 °C ~ 85 °C
 4. CONTACT RESISTANCE: 40 MILLIONHM MAX
 5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
 6. LNSERTION FORCE : 5N~20N
 7. UNMATING FORCE: 8N~20N
 8. DURABILITY: 10,000 CYCLES



PIN ASSIGNMENT												BLADE	SHELL
A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12		
GND	TX1+	TX1-	VBUS	CC1	D+	D-	SBU1	VBUS	RX2+	RX2-	GND		
GND	RX1+	RX1-	VBUS	SBU2	D+	D-	CC2	VBUS	TX2+	TX2-	GND	GND	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1		

7	COVER SHELL	STAINLESS STEEL	NI Plated	1PCS
6	SHELL	STAINLESS STEEL	NI Plated	1PCS
5	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
4	MD	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
3	CONTACT	COPPER ALLOY	Au30+1U" /Ni Plated	1SET
2	CONTACT	COPPER ALLOY	Au30+1U" /Ni Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	PA9T-GP2450 BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

DESIGN	MISS ZENG	SC ALL			未注公差 T00LERANCE	品名:	
DRAWIGN	MISS LI	ANIT	MM		X. ±0.50	X°. ±2°	连接器
CHECK	Mr. ZENG	SIZE	A4: 210*297		X. ±0.30	X°. ±1°	型号:
APPROVAL		VERSION	01		.XX ±0.20	.XX° ±0.5°	CUSTOMER DRAWING
				.XXX ±0.10		双壳大电流沉板1.68	

东莞市航宏电子科技有限公司
 Dongguan Hanghong Electronics Co., Ltd.