



ROHS

REV.	ECN. NO.	DESCRIPTION	ENG	DATE
A				

NOTE:
 1.MATERIAL SPECIFICATION:
 1.HOUSING:HIGH TEMPERATURE RESISTANT PLASTIC,UL94 V-0.
 2.CONTACTS:COPPER ALLOY
 3.MID PLATE: STAINLESS STEEL
 4.FRONT SHELL: STAINLESS STEEL
 5.EMI PLATE: STAINLESS STEEL
 2.PLATING SPECIFICATION:
 2-1.CONTACTS:
 Ni 50u" MIN. UNDER PLATED OVER ALL.
 Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.
 (GOLD PLATING THICKNESS FOLLOW THE P/N)
 PLATING SPECIFICATIONS OF THE SOLDER AREA FOLLOW THE P/N
 2-2.FRONT SHELL:
 Ni 30u" MIN. UNDER PLATED OVER ALL.
 2-3.MID PLATE:
 Ni 30u" MIN. UNDER PLATED OVER ALL.
 Sn 80u"MIN. PLATED OVER ALL
 2-4.EMI PLATE:
 CLEAR ONLY
 3.MECHANICAL PERFORMANCE:
 3-1.INSERTION FORCE: 0.5~2.0kgf,
 3-2.REMOVAL FORCE: 0.8kgf~2.0kgf.
 3-3.DURABILITY: 10000 CYCLES.
 4.ELECTRICAL PERFORMANCE:
 4-1. CURRENT RATING:5.0A
 VOLTAGE RATING:5.0V
 4-2. I.LCR: VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX.
 SHIELD: 50mΩ/MAX.
 I.LCR MAX. CHANGE OF ALL PINS: 10mΩ.
 4-3.INSULATION RESISTANCE: 100MΩ MIN
 4-4.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.
 5. ENVIRONMENTAL PERFORMANCE:
 OPERATING TEMPERATURE: -25°C~+85°C.
 6.IR REFLOW:
 THE PEAK TEMPERATURE ON THE BOARD SHALL
 BE MAINTAINED FOR 10 SECONDS AT 260°C.

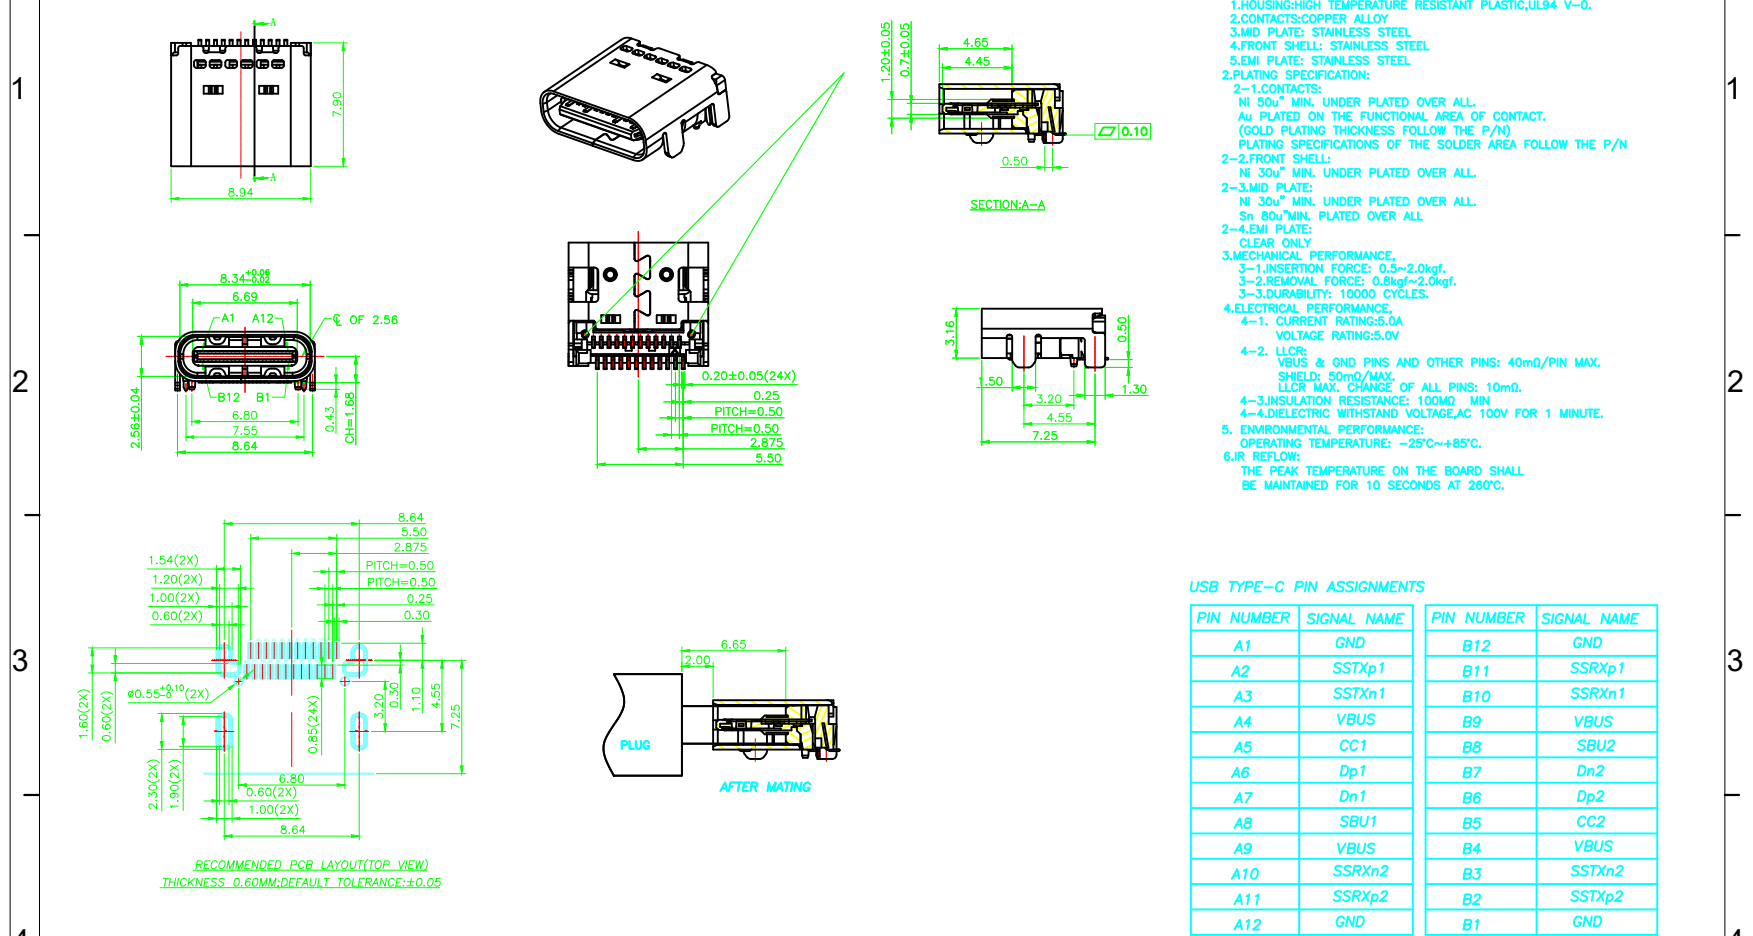

DESIGN	MISS ZENG	SC ALL		 未注公差 T00LERANCE X. ±0.50 X'. ±2" X. ±0.30 X'. ±1" .XX ±0.20 .XX' ±0.5" .XXX ±0.10	品名: 连接器
DRAWIGN	MISS LI	ANIT	MM		型号: CUSTOMER DRAWING CF 双排24P SMT 7.9长
CHECK	Mr. ZENG	SIZE	A4: 210*297		
APPROVAL		VERSION	01		


东莞市航宏电子科技有限公司
 Dongguan Hanghong Electronics Co., Ltd.