



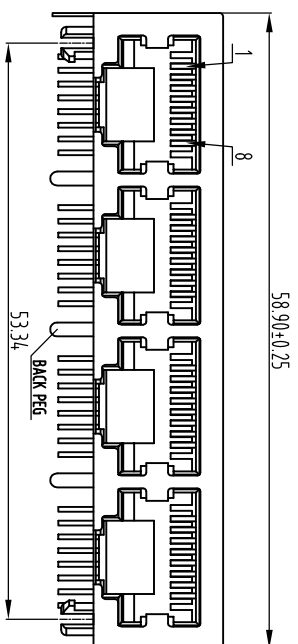

NOTES:

MATERIAL:

1.HOUSING
2.CONTACT
3.SHIELD
(ROUND PIN Φ 0.46mm)

•GLASS FILLED POLYESTER UL94V-0
•PHOSPHOR BRONZE WITH GOLD PLATING OVER NICKEL.
•0.20mm THICKNESS COPPER ALLOY WITH NICKEL PLATED.

ELECTRICAL:

- | | |
|---------------------------------|----------------------------------|
| 1.VOLTAGE RATING | :125V AC. |
| 2.CURRENT RATING | :15AMP. |
| 3.CONTACT RESISTANCE | :30 MILLIOHMS MAX. |
| 4.INSULATION RESISTANCE | :500 MEGOHMS MIN @ 500V D.C. |
| 5.ELECTRIC WITHSTANDING VOLTAGE | :1000V AC RMS 50Hz OR 60Hz. MIN. |

MECHANICAL:



1. INSETION FORCE : 2.2kg MAX.
2. RETENTION STRENGTH : 7.7kg BETWEEN JACK AND PLUG
3. DURABILITY : 750 CYCLES MIN.

ENVIRONMENTAL:


- | | |
|-------------|------------------|
| 1.STORAGE | : -40°C to 85°C. |
| 2.OPERATION | : -40°C to 85°C. |

THE MARTS MODULAR PLUG CONFORMING TO FCC PART 68

PART NUMBER:

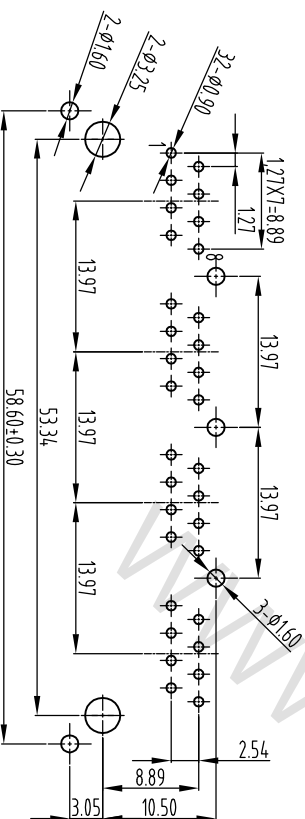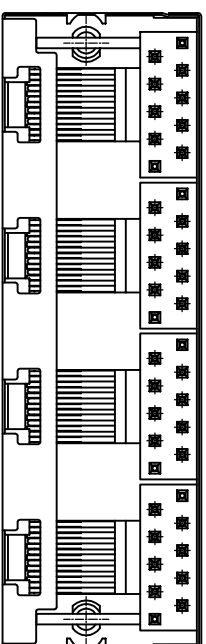

PCB LAYOUT/TOP VIEW

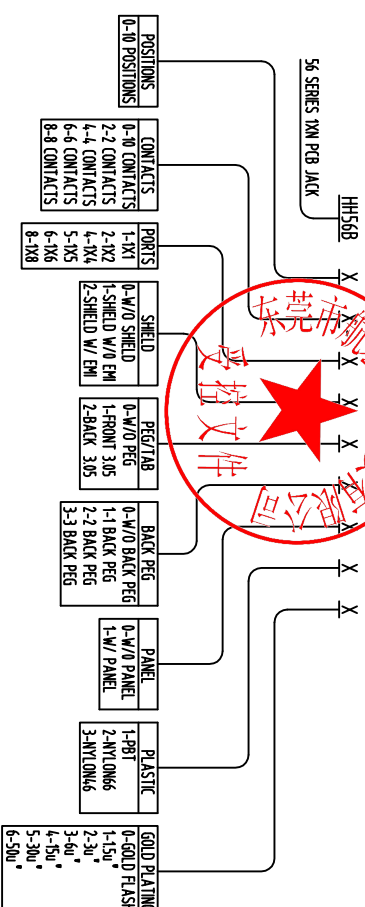

DESIGN	MISS ZENG	SC ALL				未注公差 TOLERANCE 0 ±0.20 ANGLES ±5°	品名： 网口连接器
DRAWING	MISS LI	ANIT	MM				
CHECK	MR. ZENG	SIZE	A4: 210*297				型号： HH56B08-41130XX
APPROVAL		VERSION	01		000 ±0.1		



东莞市航宏电子科技有限公司
 Dongguan Hanghong Electronics Co., Ltd.



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.