
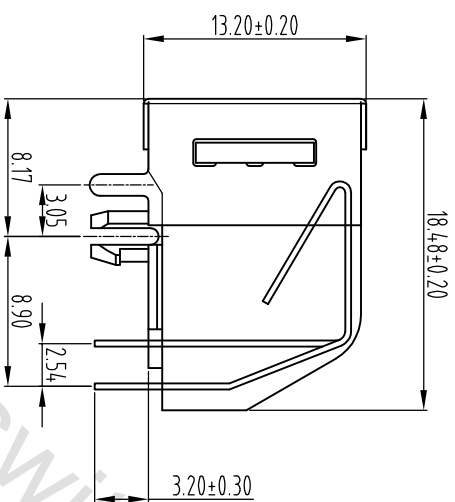


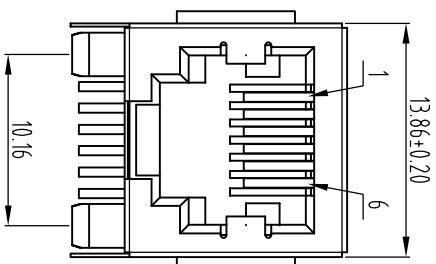

NOTES:

MATERIAL:

MATERIAL:

1.HOUSING

2.CONTACT

2.CONTACT (PLAT PIN T=0.35mm)

3. SHIELD

3.SHIELD

GLASS FILLED POLYESTER UL94V-0
PHOSPHOR BRONZE WITH GOLD PLATING OVER NICKEL.
0.20mm THICKNESS COPPER ALLOY WITH NICKEL PLATED.

ELECTRICAL

1.VOLTAGE RATING

2.CURRENT RATING

3. CONTACT RESISTANCE

4. INSULATION RESISTANCE

5. DIELECTRIC WITHSTANDING VOLTAGE

:125V AC.

:1.5AMP.

:30 MILLIOHMS MAX.

:500 MEGOHMS MIN @ 500V DC..

:1000V AL RMS 50HZ OR 60HZ. 1MIN.

MECHANICAL:

1.1. INSERTION FORCE

2. RETENTION STRENGTH

3. DURABILITY

ENVIRONMENTAL:

1. STORAGE



2. OPERATION

:-40℃ TO 85℃.


FORMING TO

THE MARTS MODULAR PLUG CONFORMING TO FCC PART 68
PART NUMBER: 宝电子科技

PART NUMBER:

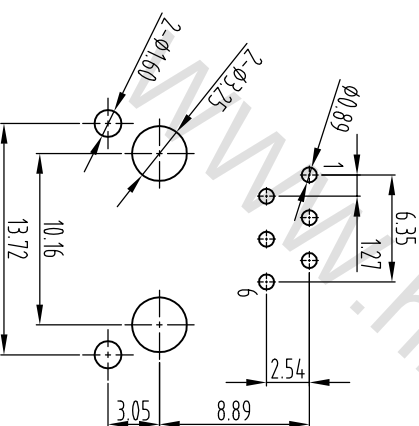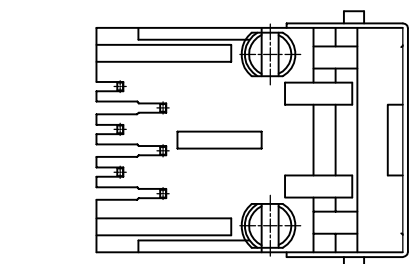

PCB LAYOUT/TOP VIEW

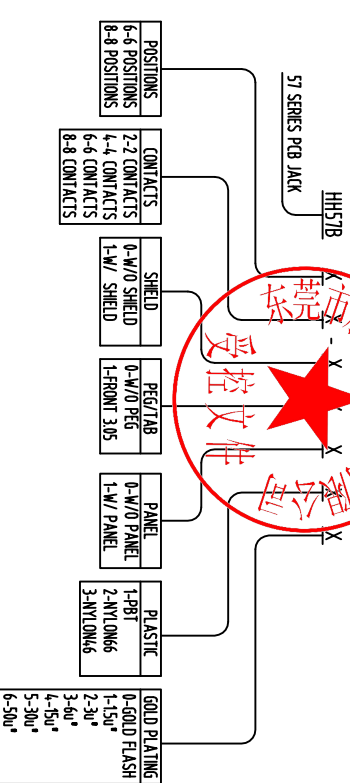

DESIGN	MISS ZENG	SC ALL		
DRAWING	MISS LI	ANIT	MM	
CHECK	MR. ZENG	SIZE	A4 : 210*297	
APPROVAL		VERSION	01	

未注公差 TOLERANCE	
.0 ±0.20	ANGLES ±5°
.00 ±0.15	
.000 ±0.1	

部
内
..

网口连接器

型号:

HH57B66-111XX



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.