
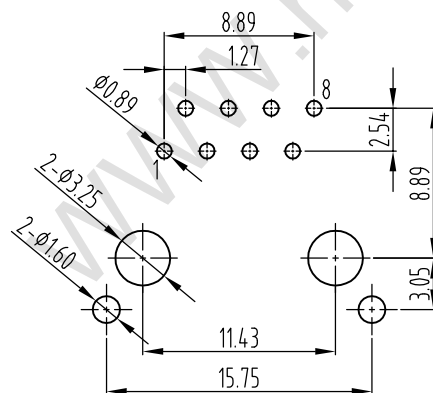

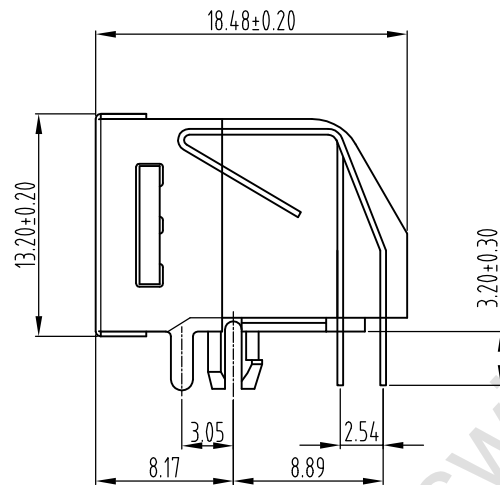


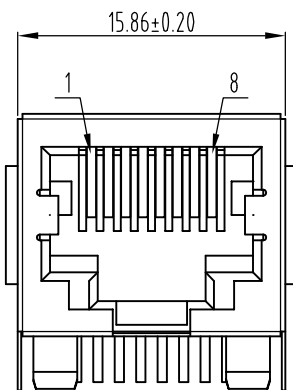

PCB LAYOUT/TOP VIEW

NOTES:

MATERIAL:

1.HOUSING	:GLASS FILLED POLYESTER UL94V-0
2.CONTACT (PLAT PIN T=0.35mm)	:PHOSPHOR BRONZE WITH GOLD PLATING OVER NICKEL.
3.SHIELD	:0.20mm THICKNESS COPPER ALLOY WITH NICKEL PLATED.

ELECTRICAL:

1.VOLTAGE RATING	:125V AC.
2.CURRENT RATING	:1.5AMP.
3.CONTACT RESISTANCE	:30 MILLIOHMS MAX.
4.INSULATION RESISTANCE	:500 MEGOHMS MIN @ 500V DC.
5.DIELECTRIC WITHSTANDING VOLTAGE	:1000V AC RMS 50Hz OR 60Hz. 1MIN.

MECHANICAL:


1.INSERTION FORCE	:2.2Kg MAX.
2.RETENTION STRENGTH	:7.7Kg BETWEEN JACK AND PLUG
3.DURABILITY	:750 CYCLES MIN.

ENVIRONMENTAL:

1.STORAGE	: -40℃~+85℃.
2.OPERATION	: -40℃ TO 85℃.

THE MARTS MODULAR PLUG CONFORMAING TO FCC PART68

PART NUMBER:

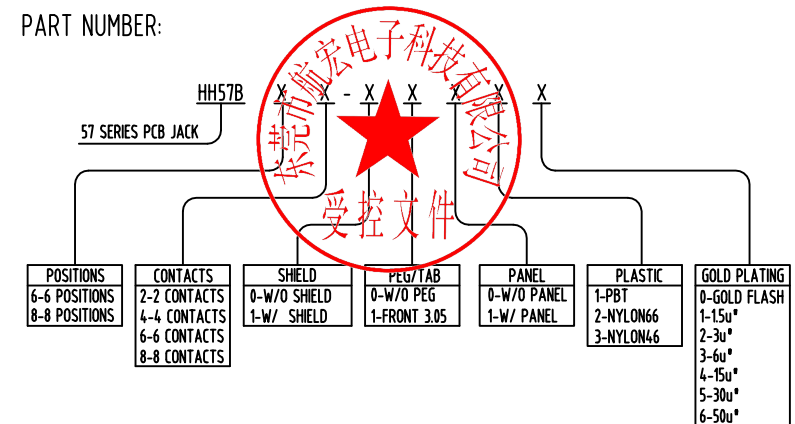

DESIGN	MISS ZENG	SC ALL			未注公差 T00LERANCE		品名 :
DRAWIGN	MISS LI	ANIT	MM		.0 ±0.20	ANGLES ±5°	网口连接器
CHECK	Mr. ZENG	SIZE	A4 : 210*297		.00 ±0.15		型号 :
APPROVAL		VERSION	01		.000 ±0.1		HH57B88-111XX



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.