
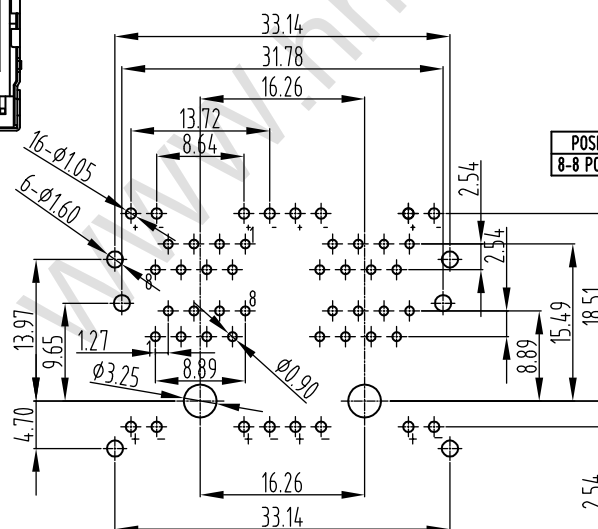
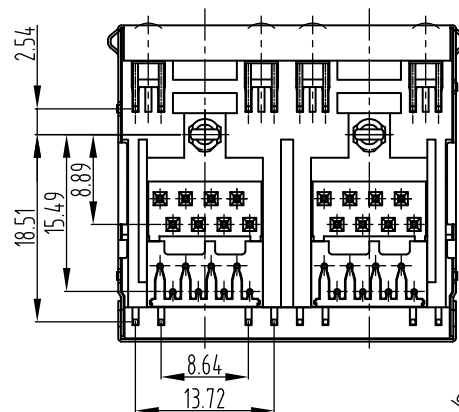
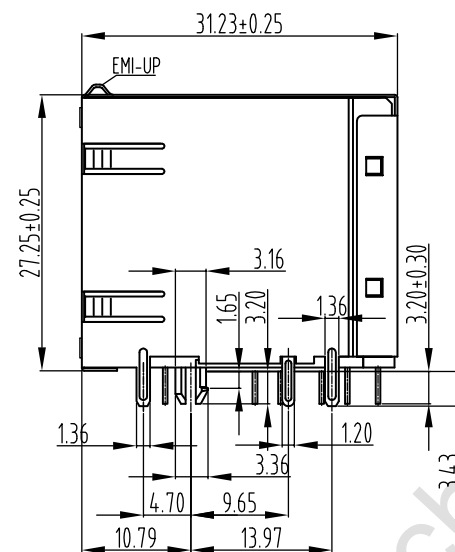


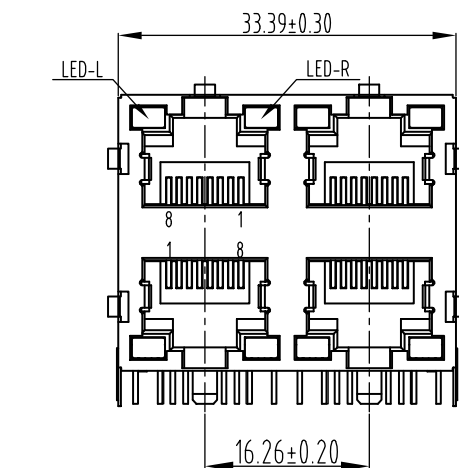

NOTES:

MATERIAL:

- 1.HOUSING
2.CONTACT (ROUND PIN Φ 0.46mm)
3.SHIELD
4.LED

:GLASS FILLED POLYESTER UL94V-0

:PHOSPHOR BRONZE WITH GOLD PLATING OVER NICKEL.

:0.20mm THICKNESS COPPER ALLOY WITH NICKEL PLATED.

:OPTION

ELECTRICAL:

- | | |
|-----------------------------------|-----------------------------------|
| 1.VOLTAGE RATING | :125V AC. |
| 2.CURRENT RATING | :15AMP. |
| 3.CONTACT RESISTANCE | :30 MILLIOHMS MAX. |
| 4.INSULATION RESISTANCE | :500 MEGOHMS MIN @ 500V DC. |
| 5.DIELECTRIC WITHSTANDING VOLTAGE | :1000V AC RMS 50Hz OR 60Hz. 1MIN. |

MECHANICAL:


- | | |
|----------------------|------------------------------|
| 1.INSERTION FORCE | :2.2Kg MAX. |
| 2.RETENTION STRENGTH | :7.7Kg BETWEEN JACK AND PLUG |
| 3.DURABILITY | :750 CYCLES MIN. |

ENVIRONMENTAL:

- 1.STORAGE : -40℃ 485℃.
2.OPERATION : -40℃ TO 85℃

THE MARTS MODULAR PLUG CONFORMAING TO FCC PART68

PART NUMBER:

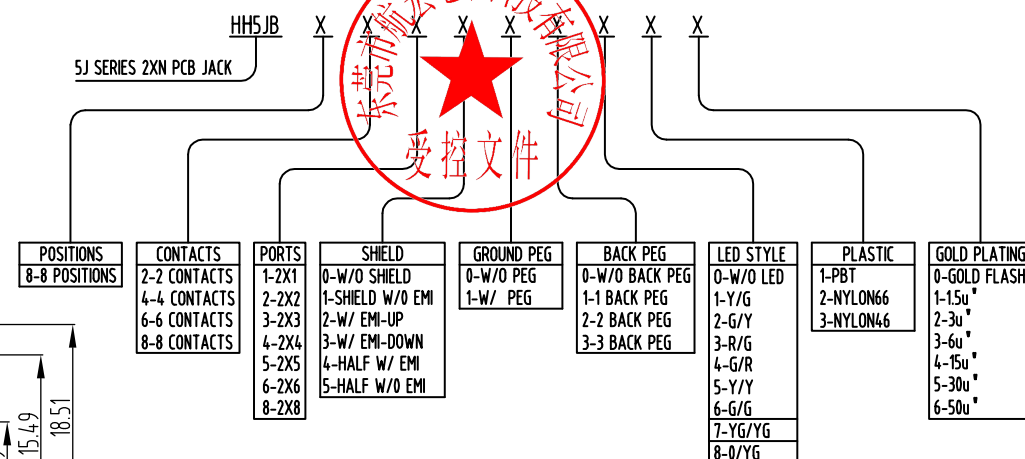

PCB LAYOUT/TOP VIEW

DESIGN	MISS ZENG	SC ALL			未注公差 T00LERANCE		品名： 网口连接器
DRAWIGN	MISS LI	ANIT	MM		.0 ±0.20	ANGLES ±5°	
CHECK	Mr. ZENG	SIZE	A4：210*297		.00 ±0.15		型号： HH5JB88-2210XXX
APPROVAL		VERSION	01		.000 ±0.1		

品名：	
-----	--

网口连接器

型号:	
-----	--

HH5JB88-2210XXX



东莞市航宏电子科技有限公司

Dongguan Hanghong Electronics Co., Ltd.