
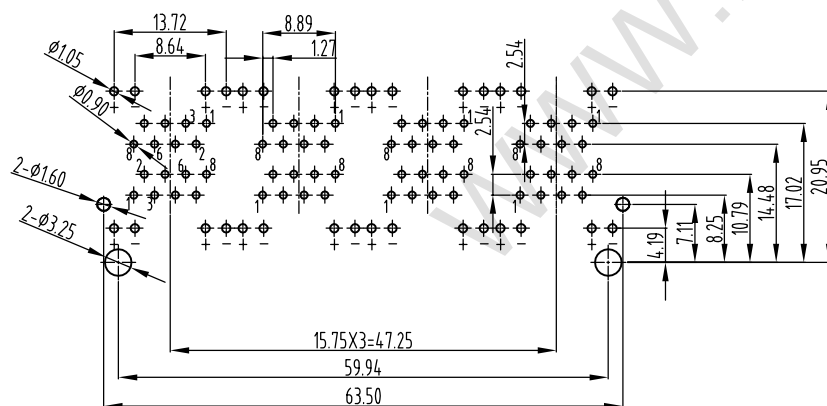
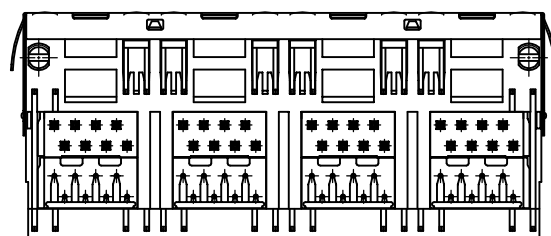
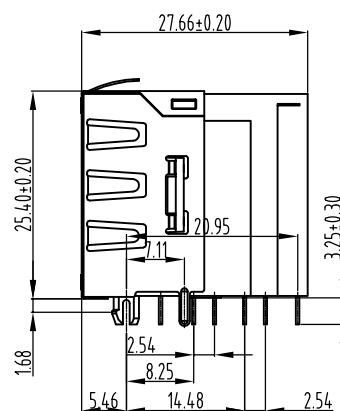


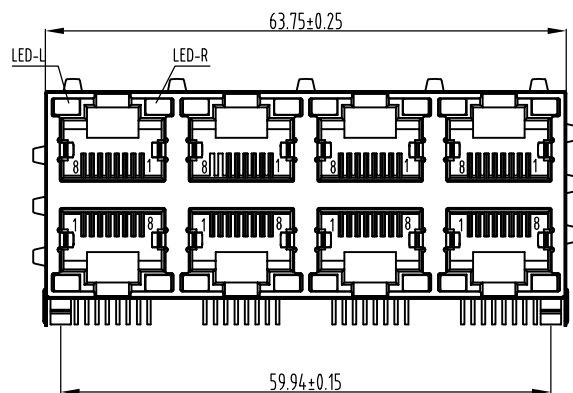

PCB LAYOUT/TOP VIEW

NOTES:

MATERIAL:

- 1.HOUSING
- 2.CONTACT (ROUND PIN $\phi 0.46\text{mm}$)
- 3.SHIELD
- 4.LED

:GLASS FILLED POLYESTER UL94V-0
:PHOSPHOR BRONZE WITH GOLD PLATING OVER NICKEL.
:0.20mm THICKNESS COPPER ALLOY WITH NICKEL PLATED.
:OPTION

ELECTRICAL:

- 1.VOLTAGE RATING :125V AC.
- 2.CURRENT RATING :1.5AMP.
- 3.CONTACT RESISTANCE :30 MILLIOHMS MAX.
- 4.INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC.
- 5.DIELECTRIC WITHSTANDING VOLTAGE :1000V AC RMS 50Hz OR 60Hz. 1MIN.

MECHANICAL:


- 1.INSETION FORCE :2.2Kg MAX.
- 2.RETENTION STRENGTH :7.7Kg BETWEEN JACK AND PLUG
- 3.DURABILITY :750 CYCLES MINI.

ENVIRONMENTAL:

- 1.STORAGE : -40℃~+85℃.
- 2.OPERATION : -40℃ TO 85℃.

THE MARTS MODULAR PLUG CONFORMAING TO FCC PART68

PART NUMBER:

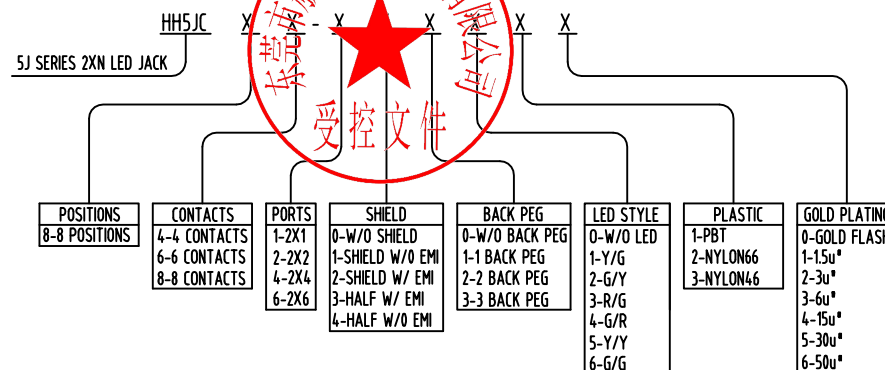

DESIGN	MISS ZENG	SC ALL			未注公差 T00LERANCE		品名 : 网口连接器
DRAWIGN	MISS LI	ANIT	MM		.0 ±0.20	ANGLES ±5°	
CHECK	Mr. ZENG	SIZE	A4 : 210*297		.00 ±0.15		
APPROVAL		VERSION	01		.000 ±0.1		

品名 :	网口连接器
型号 :	HH5JC88-430XXX



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.