

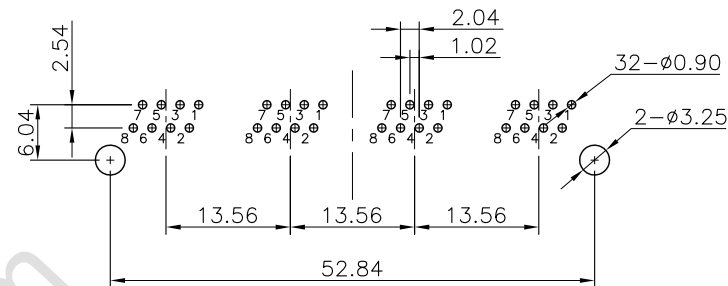


DETAIL "X"
SCALE 4:1


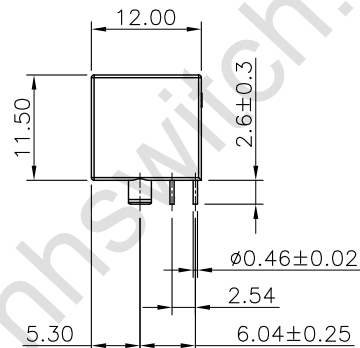


RECOMMENDED PCB LAYOUT
TOP VIEW (TOL:±0.05)

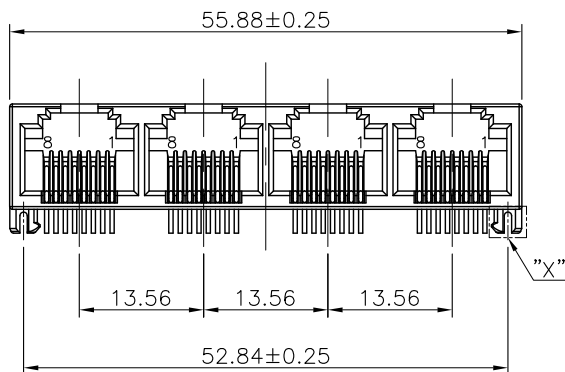

NOTES:

- MATERIAL:
 - HOUSING: PBT, 114C(001), UL94V-0;
 - CONTACT: PHOSPHOR BRONZE, $\phi 0.46 \pm 0.02 \text{mm}$;
- FINISH: GOLD Fu'' PLATED;
- RECOMMENDED PCB THICKNESS: 1.60mm;
- ELECTRICAL:
 - VOLTAGE RATING: 125 VAC RMS;
 - CURRENT RATING: 1.5 AMP;
 - CONTACT RESISTANCE: 35 MILLIOHMS MAX.;
 - INSULATION RESISTANCE: 1000 MEGOHMS MIN, 500VDC.;
 - WITHSTAND VOLTAGE: 1000 VAC RMS 50(60)Hz, 1MIN.;
- MECHANICAL:
 - MATING/UNMATING FORCE: 50N MAX.;
 - RETENTION STRENGTH: 30N MIN.;
 - OPERATING LIFE: 750 CYCLES MIN.;
- ENVIRONMENTAL:
 - STORAGE TEMPERATURE RANGE: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$;
 - OPERATION TEMPERATURE RANGE: $-25^{\circ}\text{C} \sim +70^{\circ}\text{C}$;
- MATES WITH: MODULAR PLUGS THAT CONFORM TO FCC REGULATION PART 68.500;

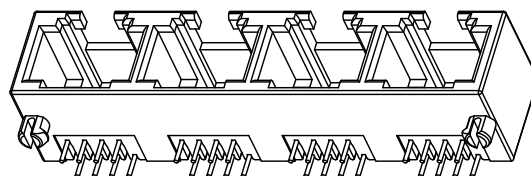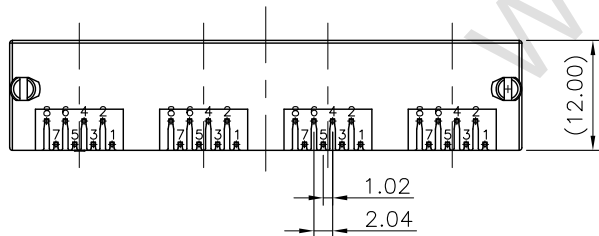

3D VIEW

DESIGN	MISS ZENG	SC ALL			未注公差 TOLERANCE		品名:
DRAWIGN	MISS LI	ANIT	MM		X.xxx ±0.10	X. ±0.35	网口连接器
CHECK	Mr. ZENG	SIZE	A4: 210*297		X.xx ±0.20	ANGLES: X.xx ±1° X.x ±3° X. ±5°	型号:
APPROVAL		VERSION	01		X.x ±0.3		RJ45 4口



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.