



Specification

MATERIAL:




Insulator: High Temperature Thermoplastic, UL 94V-0.
(塑胶: 黑色LCP, 防火等级UL 94V-0)
Contact: Copper Alloy (铜)
SHELL: SUS (不锈钢)

PLATING:



Contact: Plated 50u'' Ni Overall Contact Au 1u, pad Au
(端子: 镍底50u, 接触点1u, 焊点金)
Shell: Plated 50u'' Ni Overall, pad 1u
(外壳: 全部镍底50u, 焊盘1u)

Electrical:

Current Rating : 0.5Amps. max (额定电流: 0.5A最大)
Voltage Rating : 5V AC/DC (额定电压: 5V AC/DC)
Ambient Temperature Range : -20° C ~ +80° C (工作温度: -20度到+60度)
Storage Temperature Range : -20° C ~ +80° C (工作环境: -20度到+80度)
Ambient Humidity Range : 95% R.H. Max. (上锡效果: 95%以上)
Contact Resistance: 100mΩ max. (端子接触电阻: 100mΩ 最大)
Insulation Resistance: 1000MΩ min. / 500VDC (绝缘阻抗: 1000兆欧最小)
产品耐温温度: 260度
Mating Cycles: 3000 Min Insertions (寿命: 3000次)

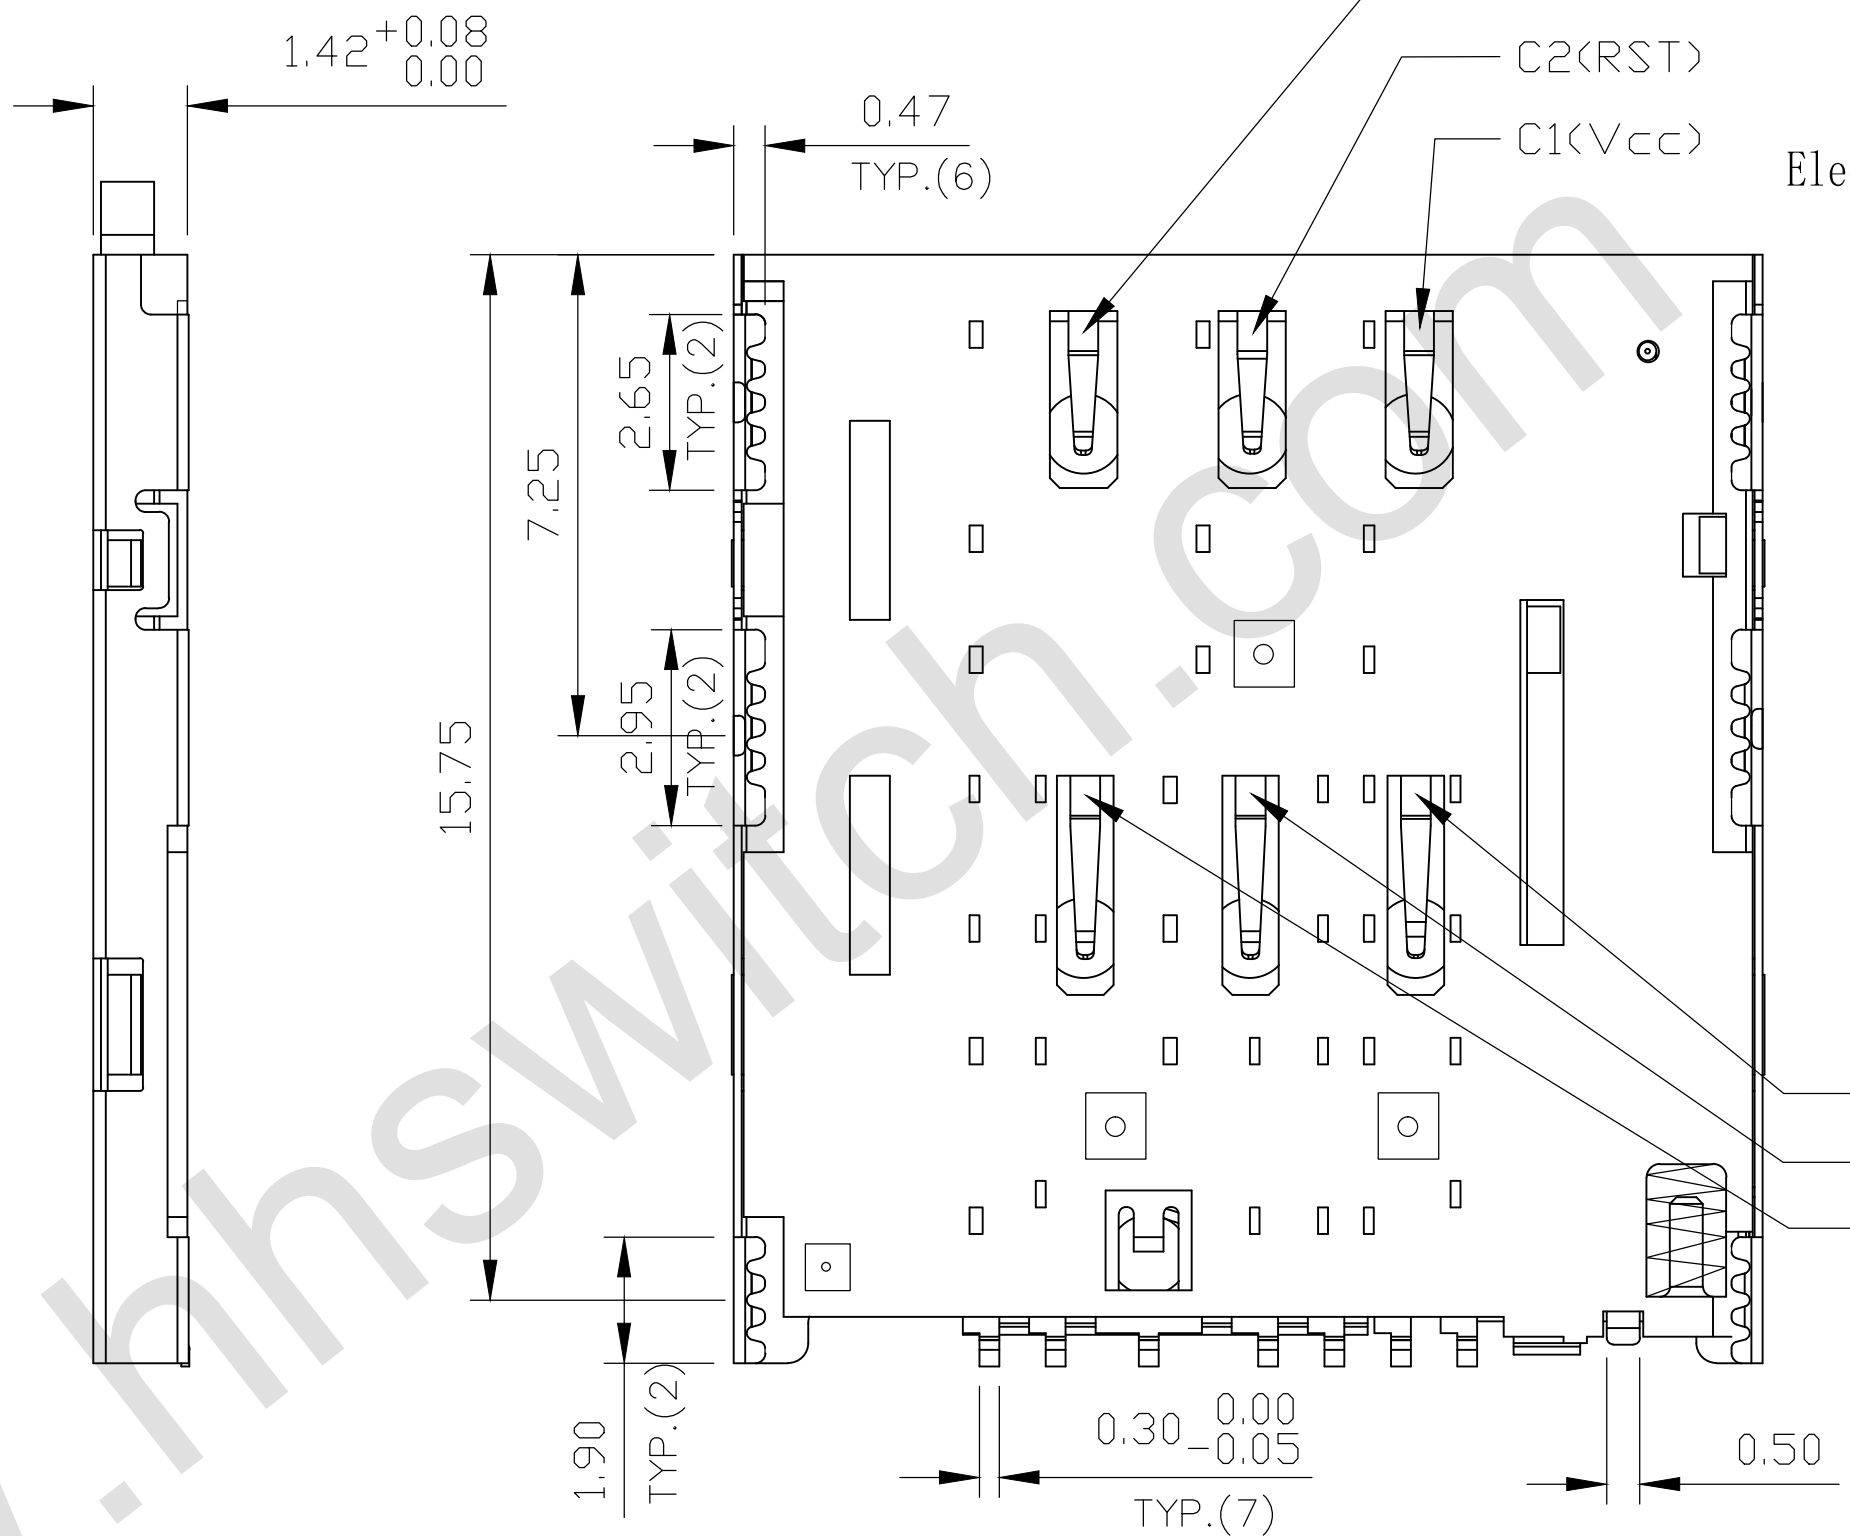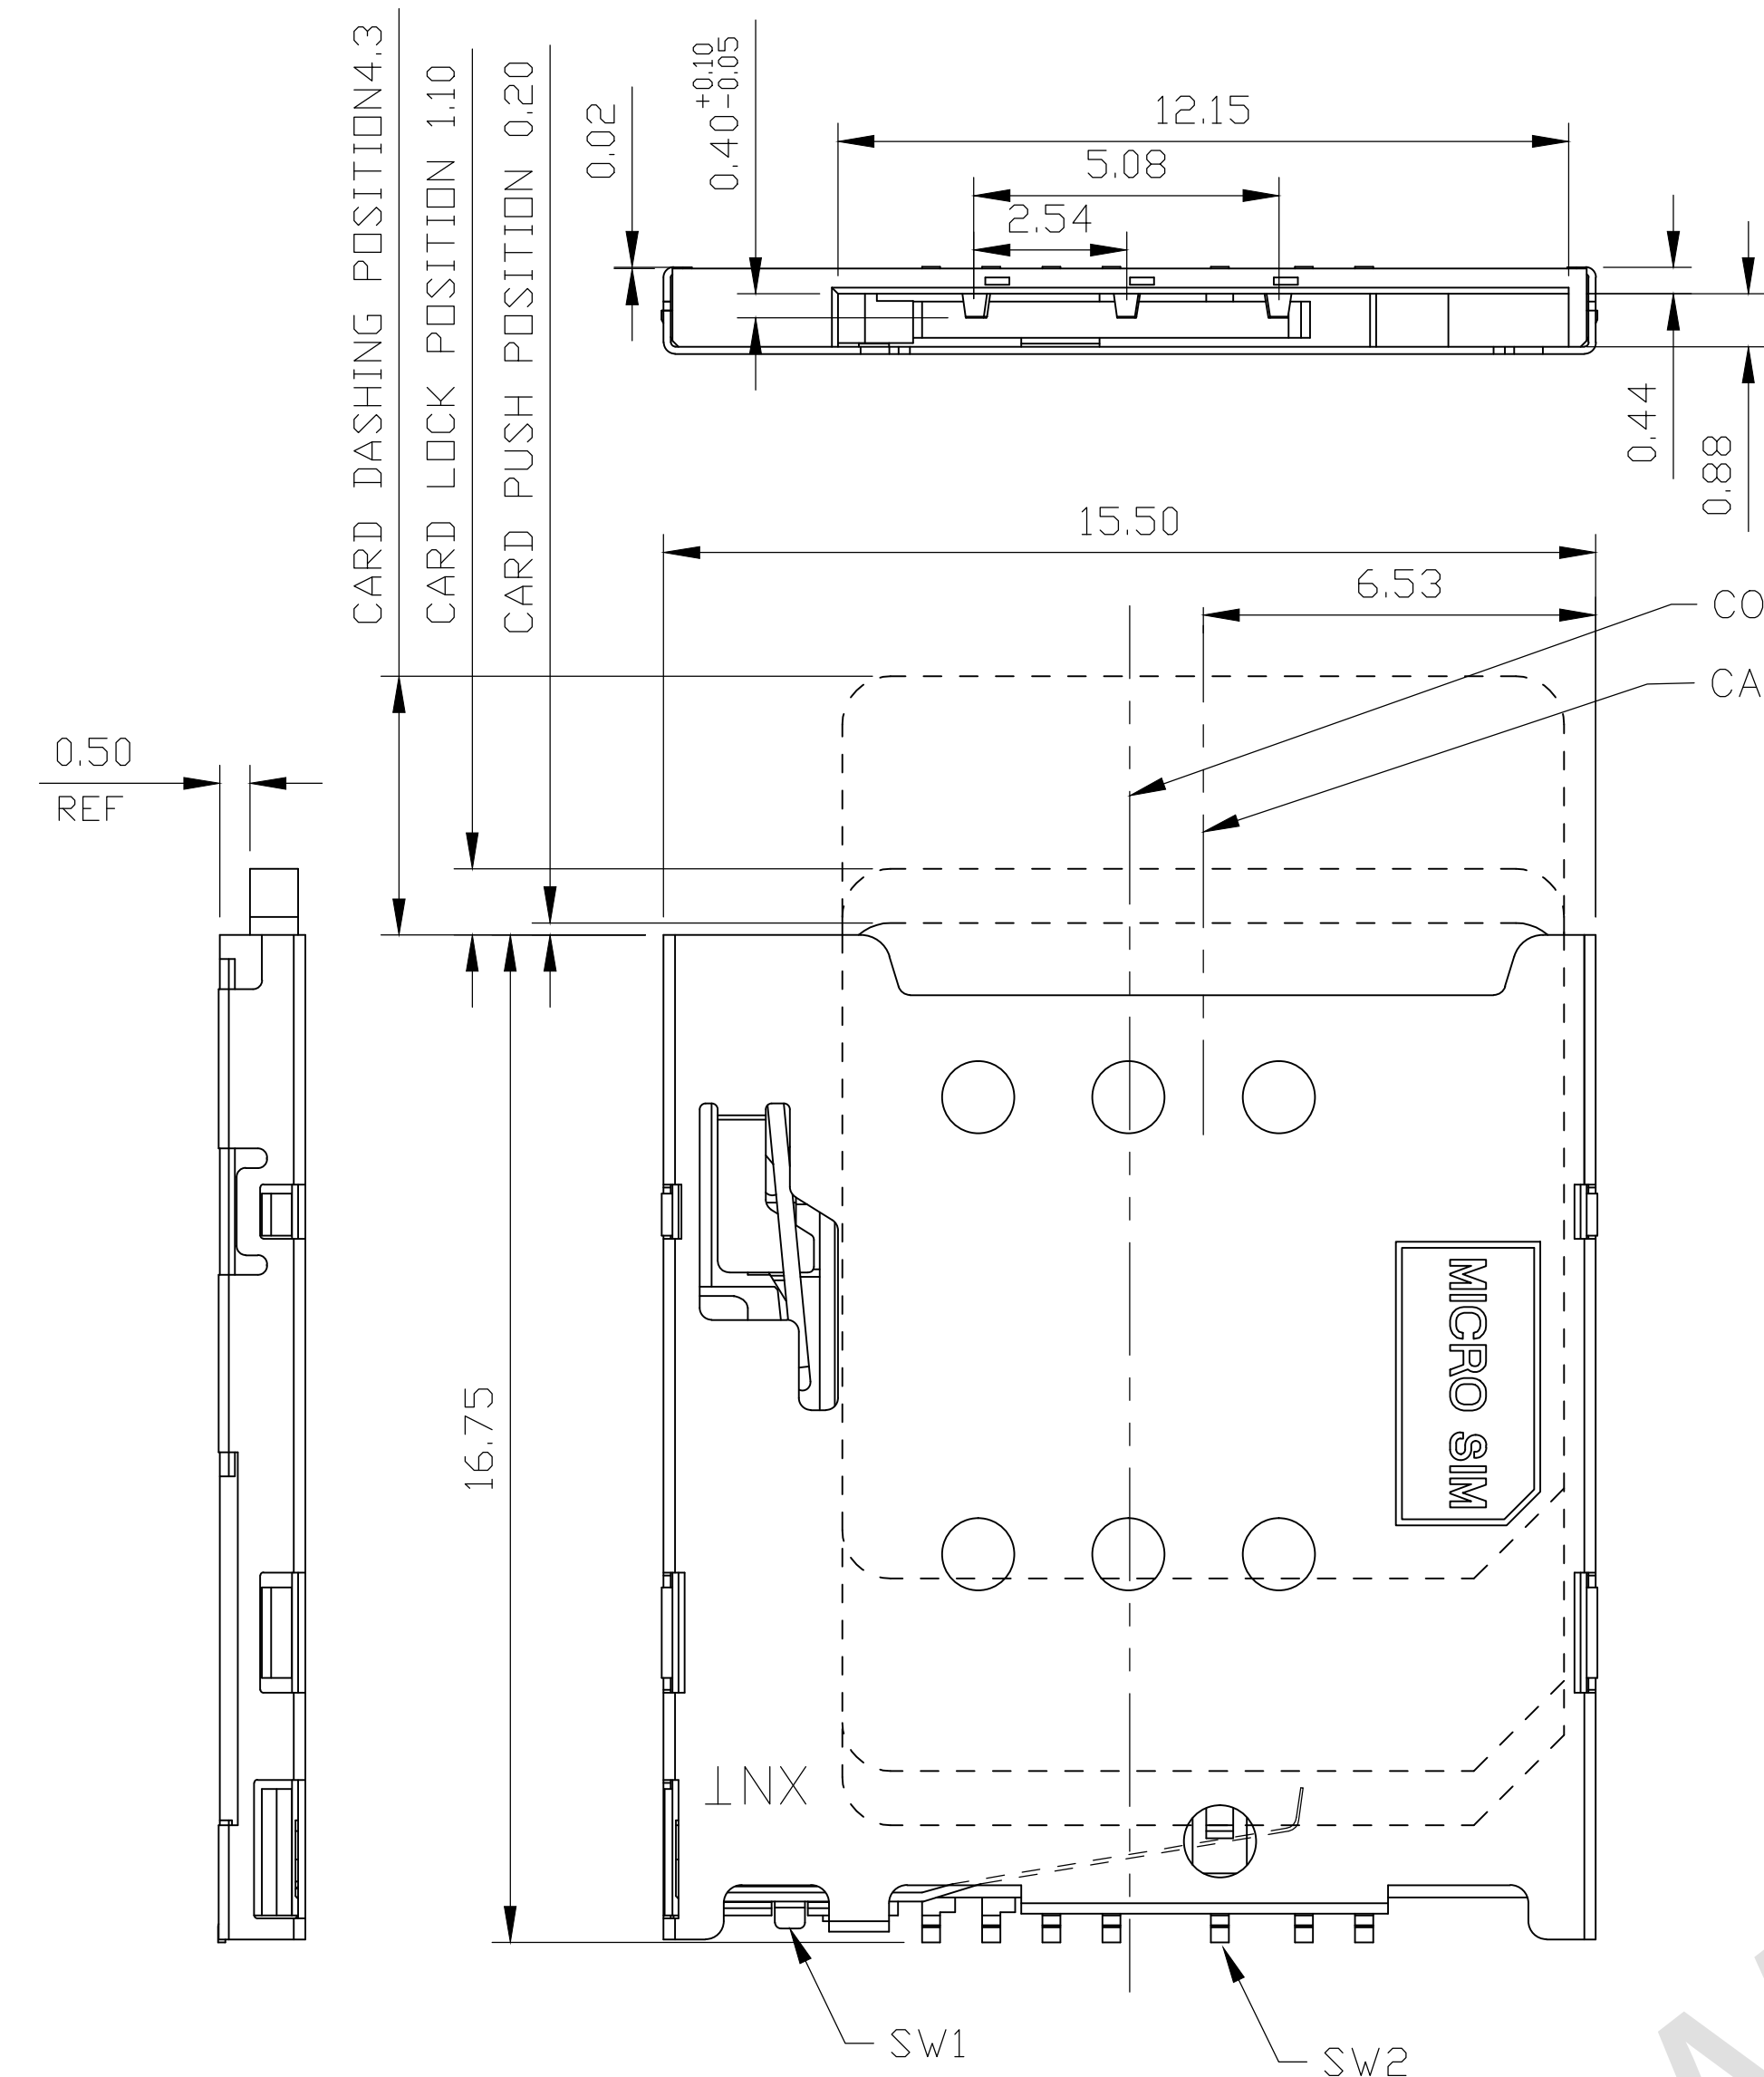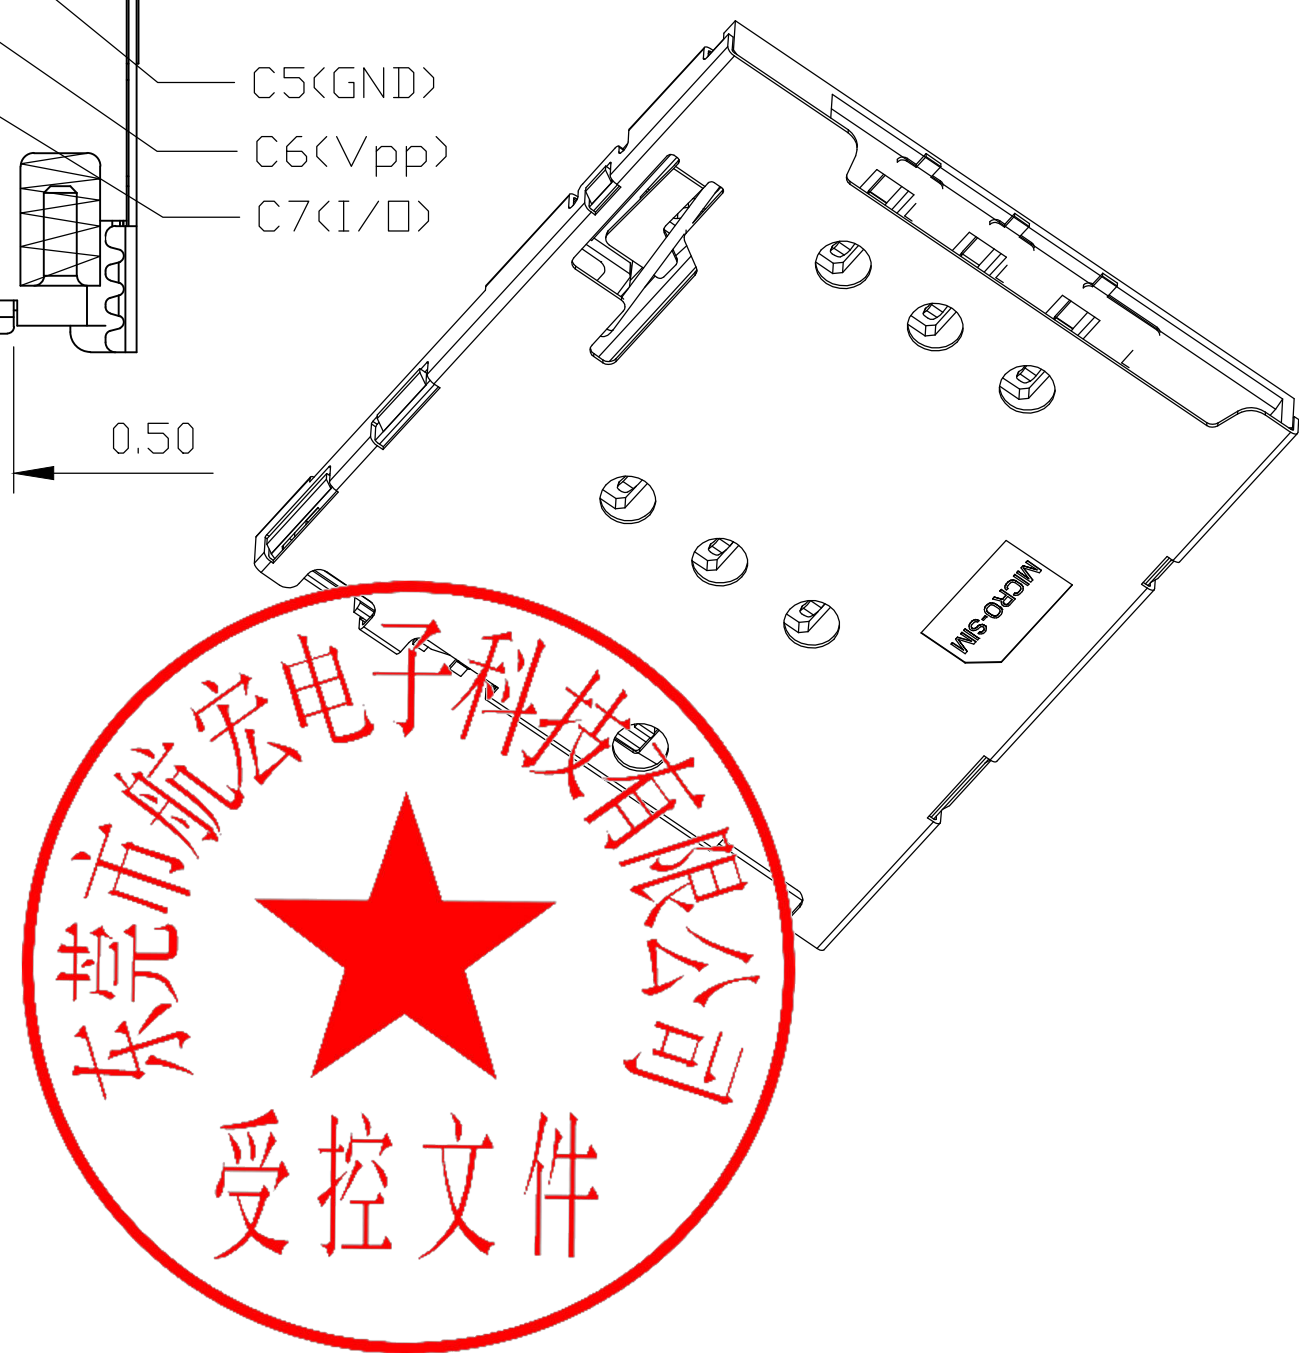

C1:VCC
C2:RST
C3:CLK
C4:RESERVED
C5:GND
C6:VPP
C7:I/O
C8:RESERVED

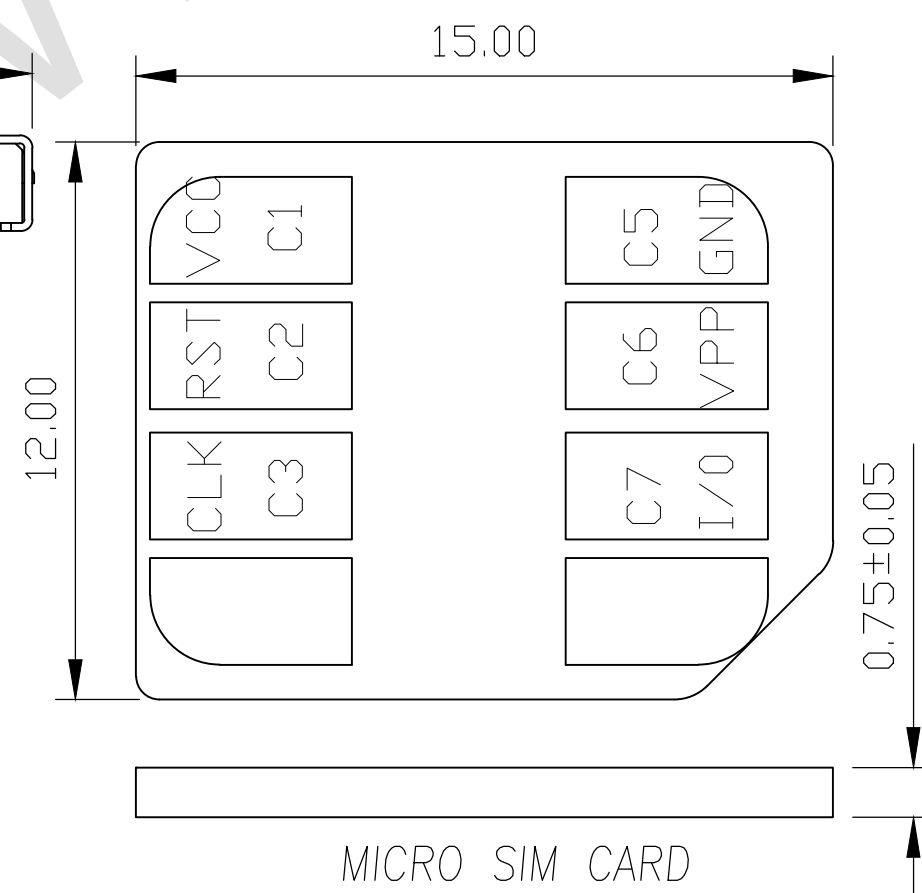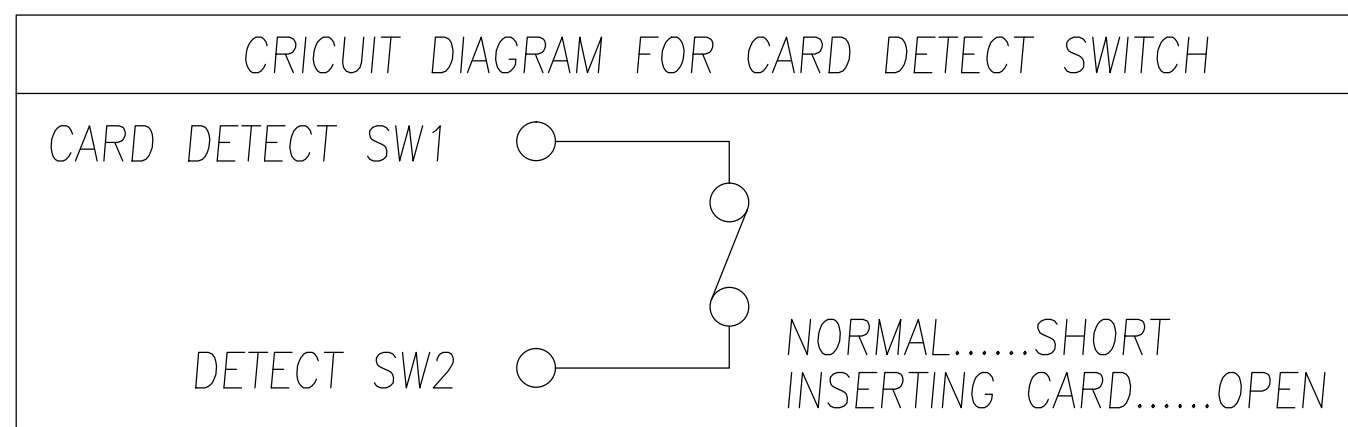

MICRO SIM CARD





DESIGN	MISS ZENG	SC ALL			未注公差 T00LERANCE		品名: Micro-sim 1.42H 防呆型
DRAWIGN	MISS LI	ANIT	MM		X. X ±0.38	X. XXX ±0.10	
CHECK	Mr. ZENG	SIZE	A4: 210*297		X.XX ±0.25	ANGULAR: ±1°	
APPROVAL		VERSION	01				

品名: Micro-sim 1.42H 防呆型
型号: HH-0271AAAG06A



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.

* 所有原料材质, 生产制程, 电镀必须符合ROHS要求

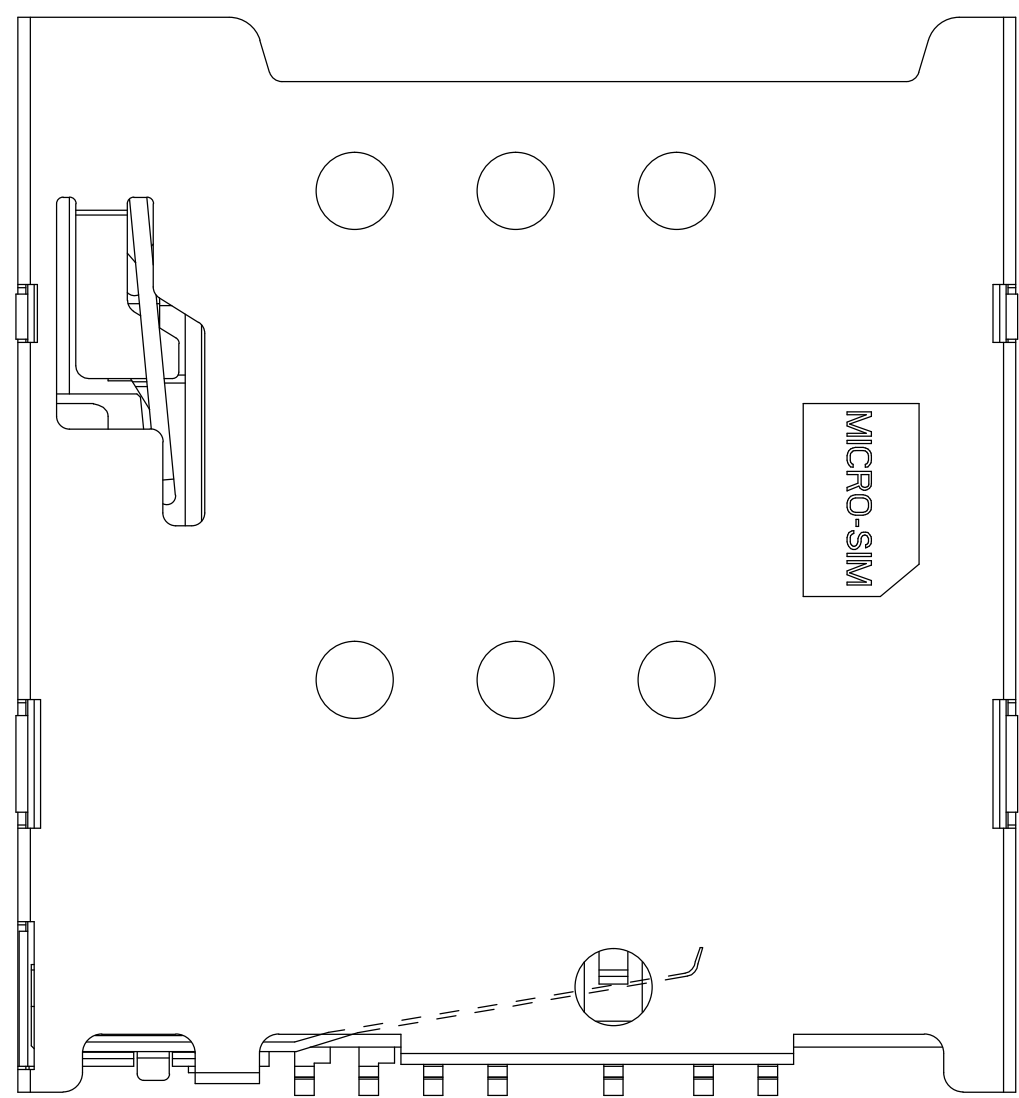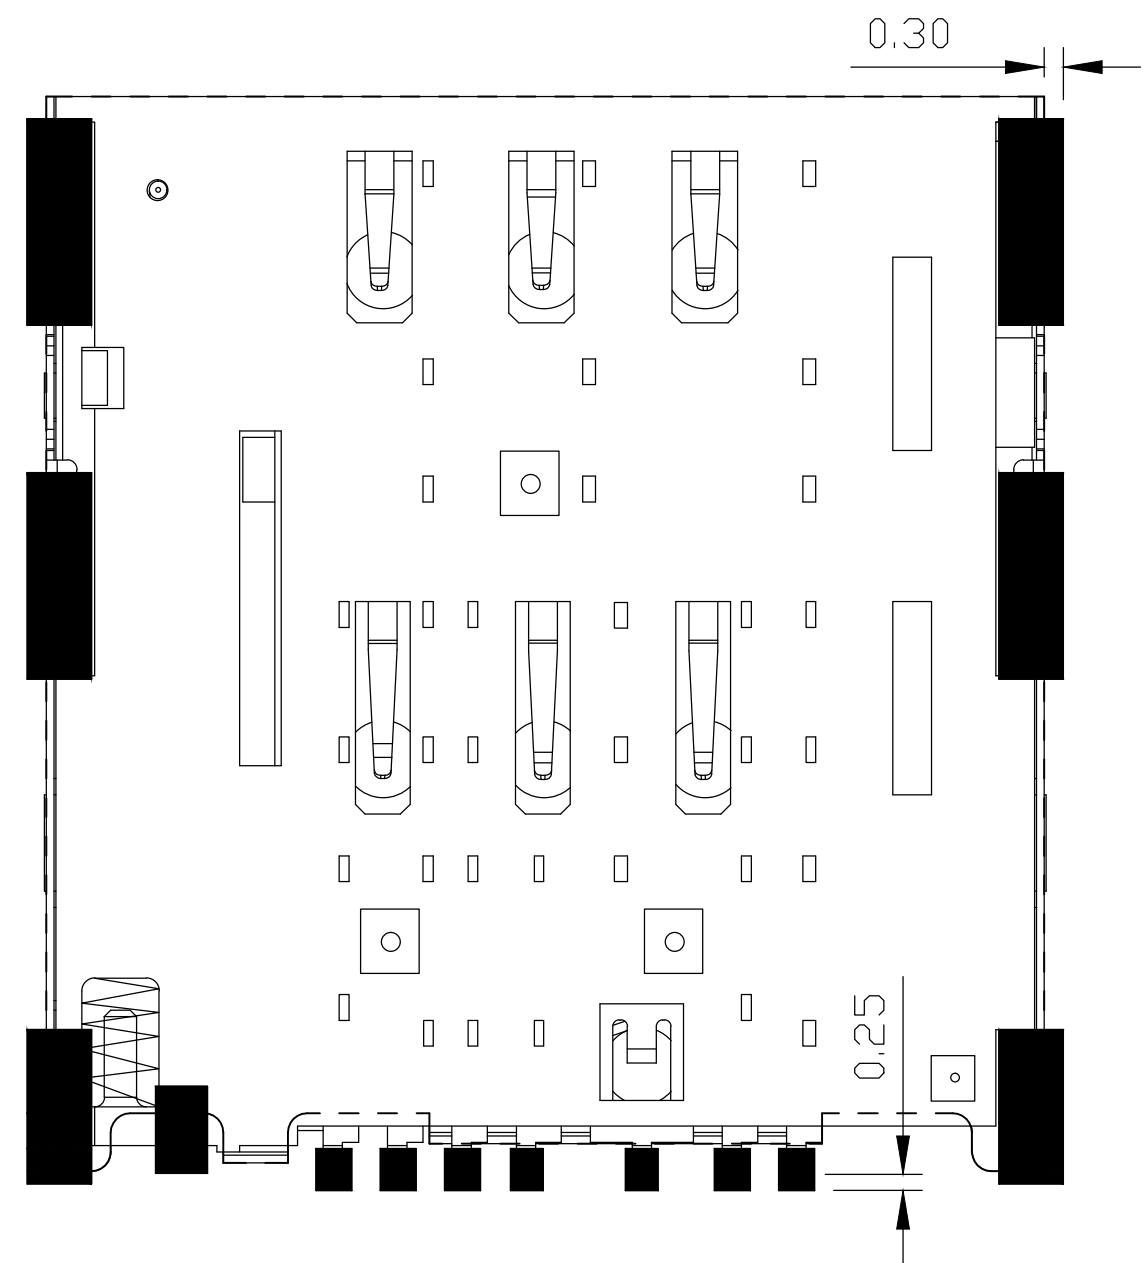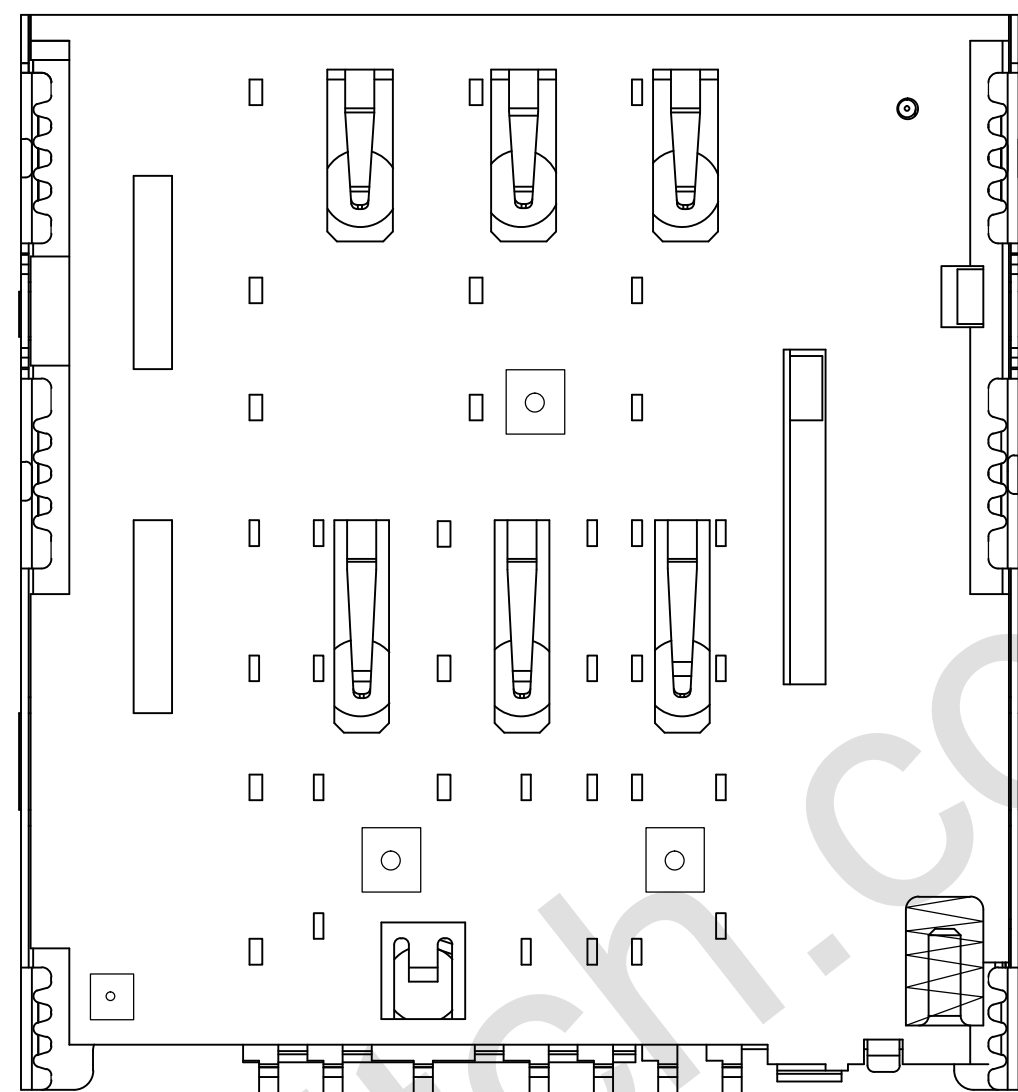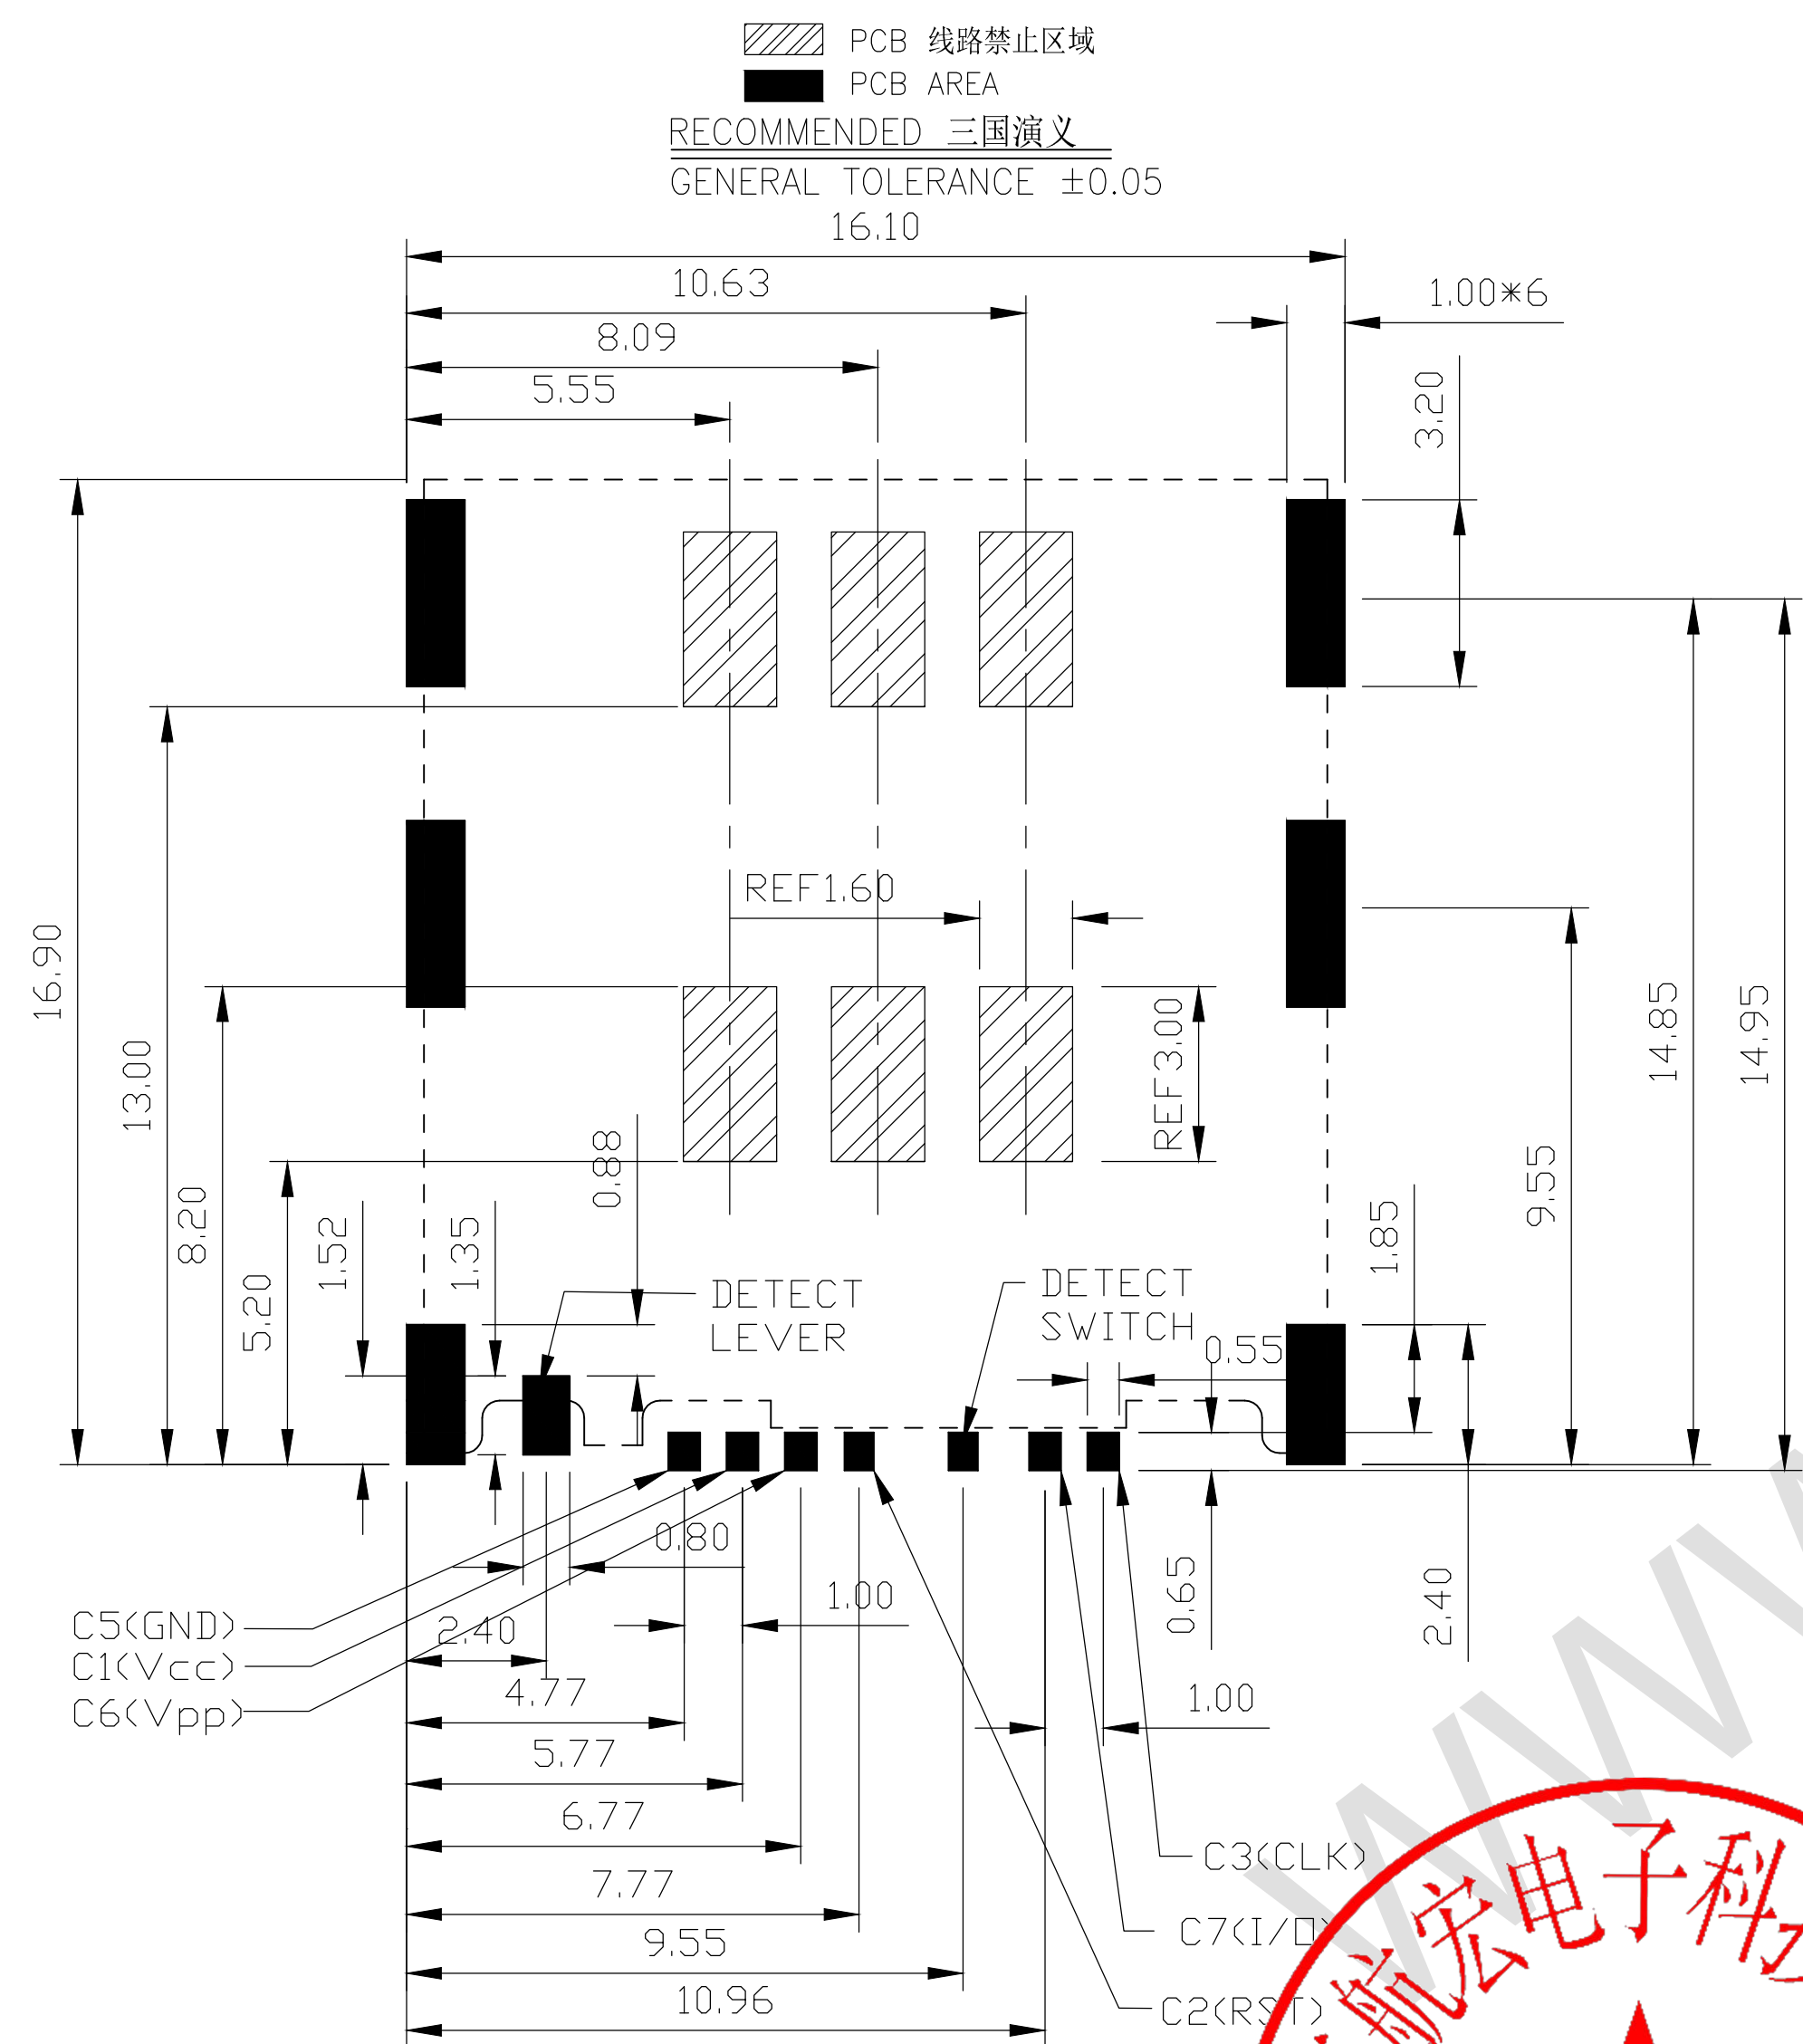

DESIGN	MISS ZENG	SC ALL		未注公差 T00LERANCE		品名: Micro-sim 1.42H 防呆型
DRAWIGN	MISS LI	ANIT		X. X ±0.38	X. XXX ±0.10	
CHECK	Mr. ZENG	SIZE		X.XX ±0.25	ANGULAR:±1°	
APPROVAL		VERSION				

型号: HH-0271AAAG06A



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.