
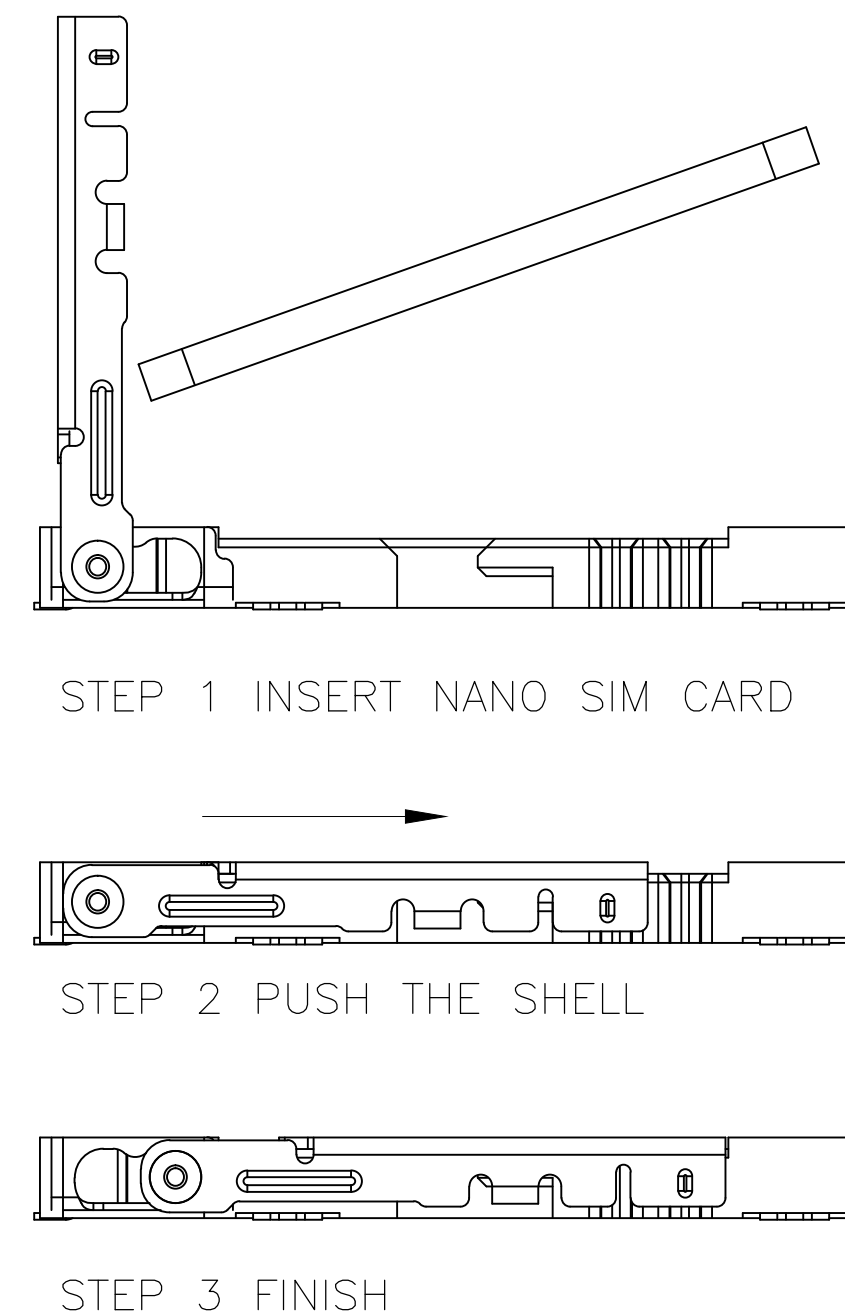
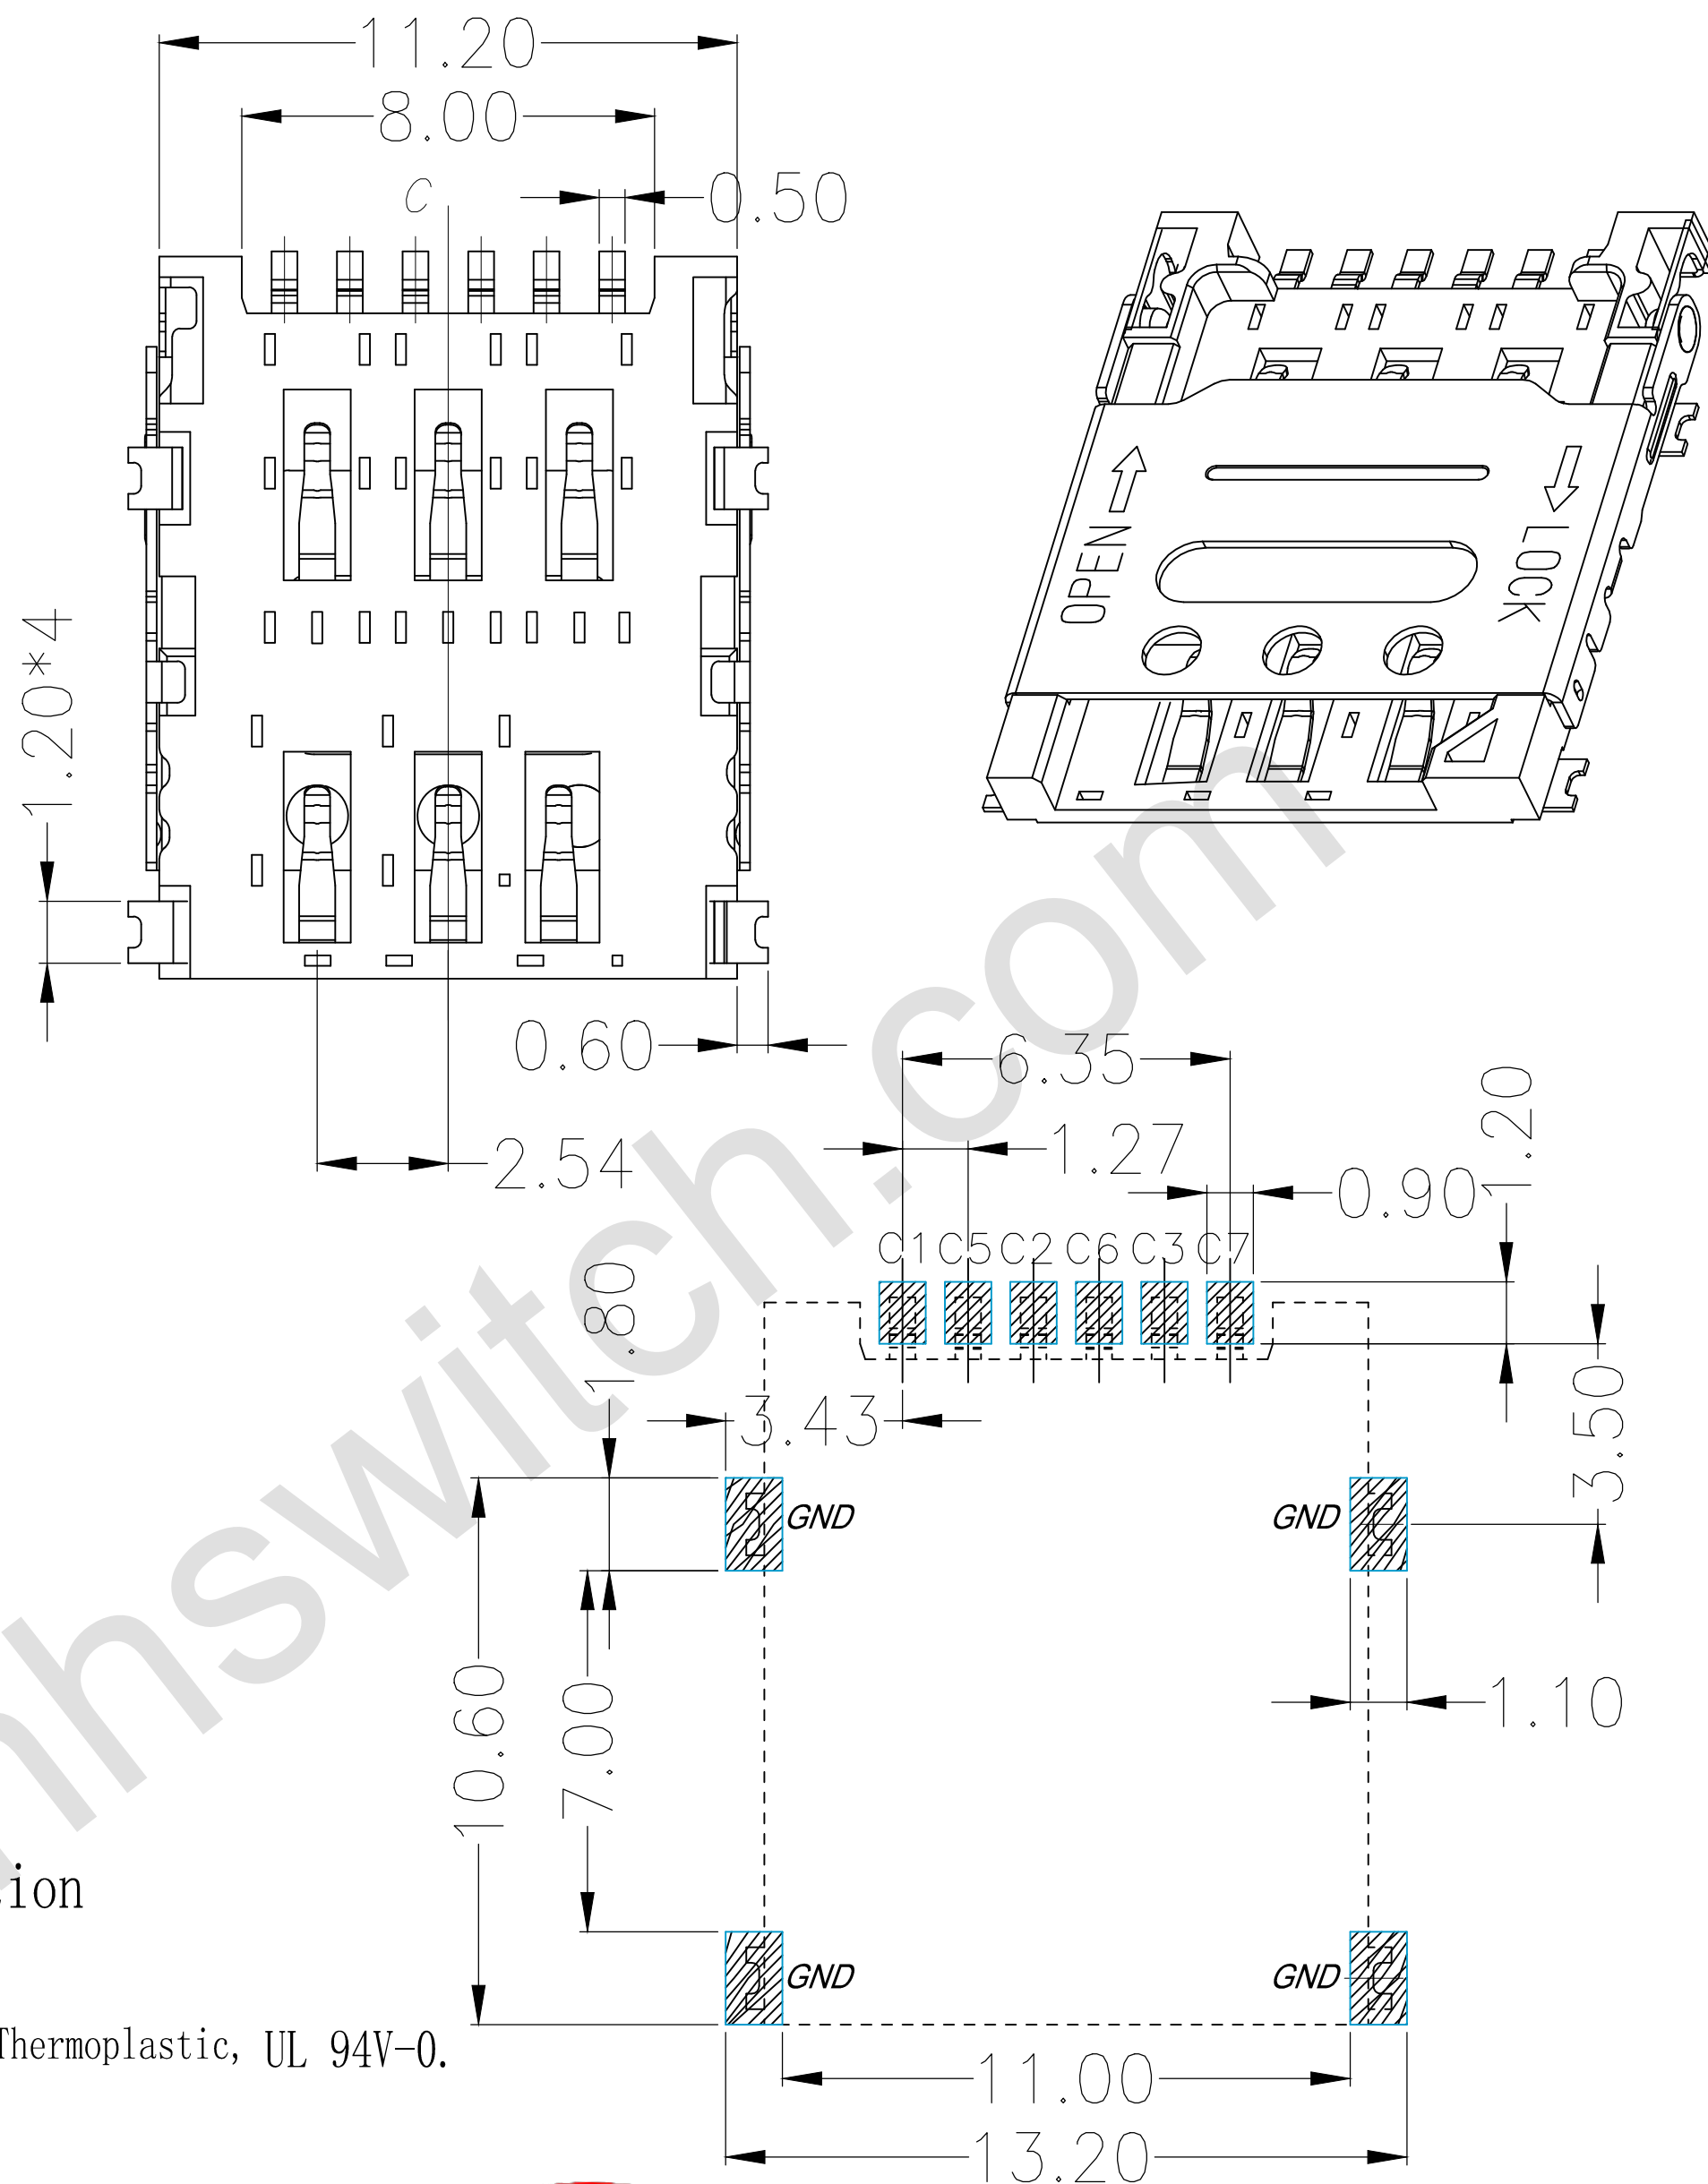


* 所有原料材质, 生产制程, 电镀必须符合ROHS要求

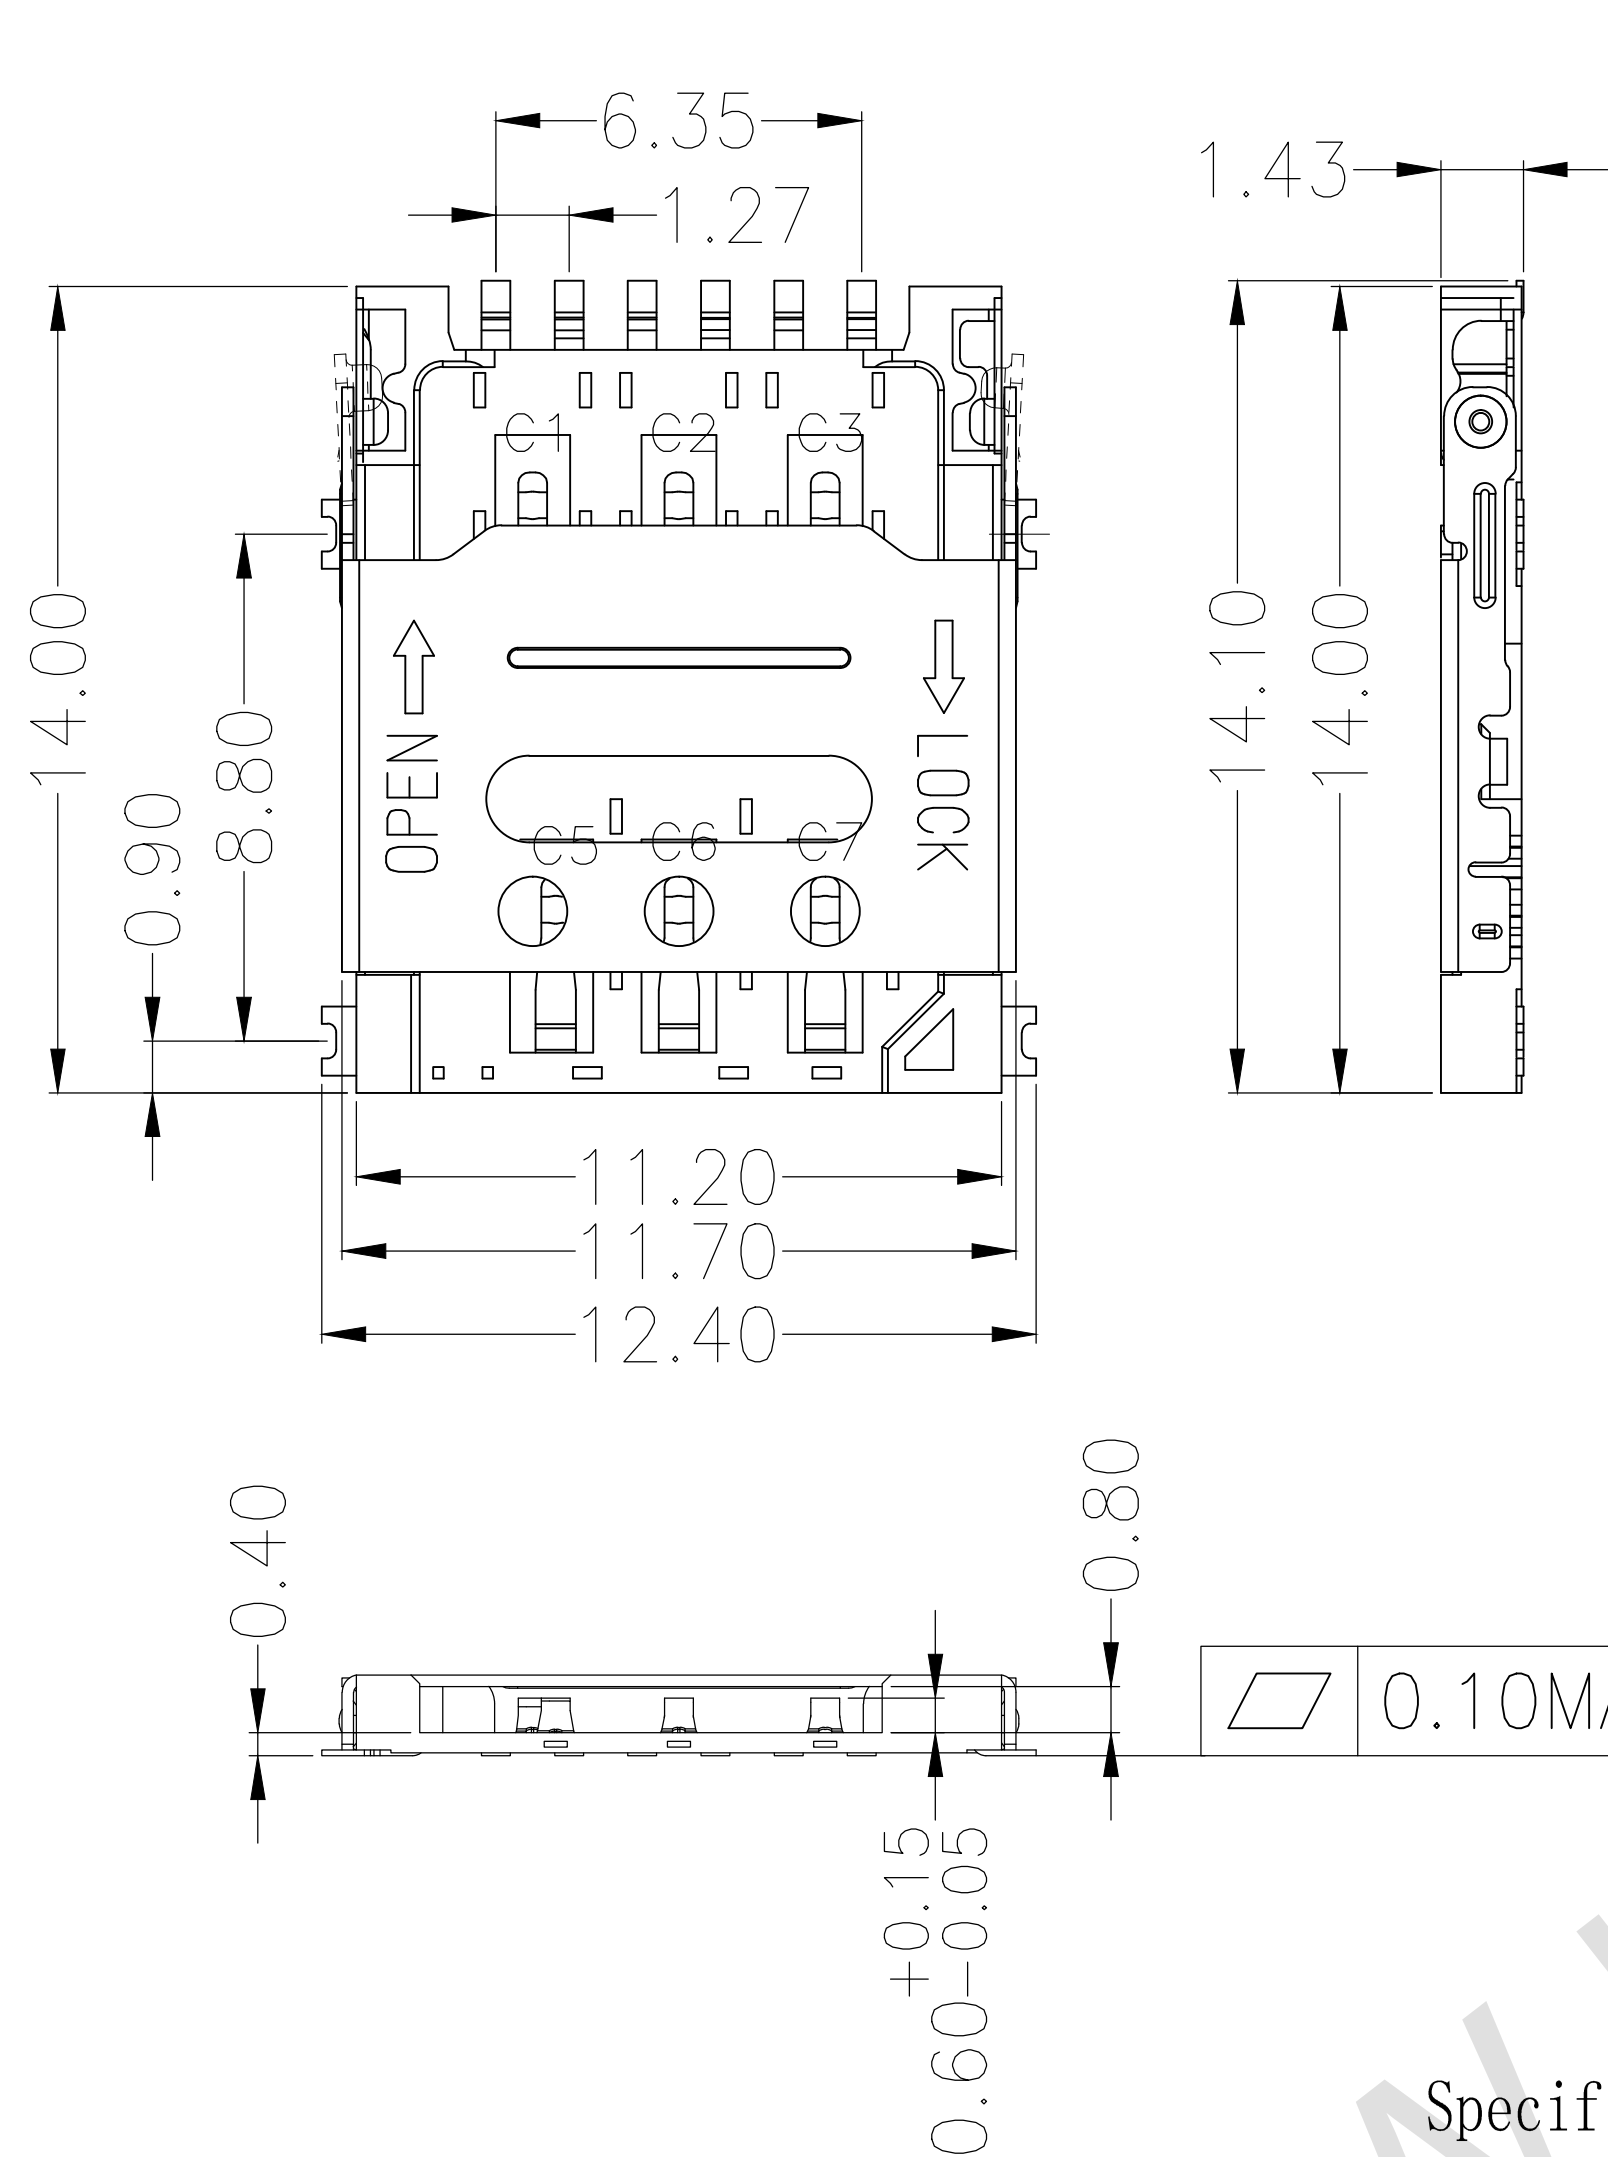

Specification


MATERIAL:
Insulator: High Temperature Thermoplastic, UL 94V-0.
Contact: Copper Alloy
SHELL: SUS

PLATING:
Contact: Plated 50u'' Ni Overall Contact ALL A 100
Shell: Clean

Electrical:
Current Rating :0.5Amps max
Voltage Rating :5V AC/DC
Ambient Temperature Range :-40° C~+85° C
Storage Temperature Range :-40° C~+85° C
Ambient Humidity Range :95% R.H. Max.
Contact Resistance:80m Ωmax.
Insulation Resistance:100M Ωmin./100V DC
Mating Cycles:5,000 Insertions
Reflow peak temp.: 260° C ±5° C, 3~5 S

PCB 焊盘区
RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

PIN NO.	PIN NAME
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O

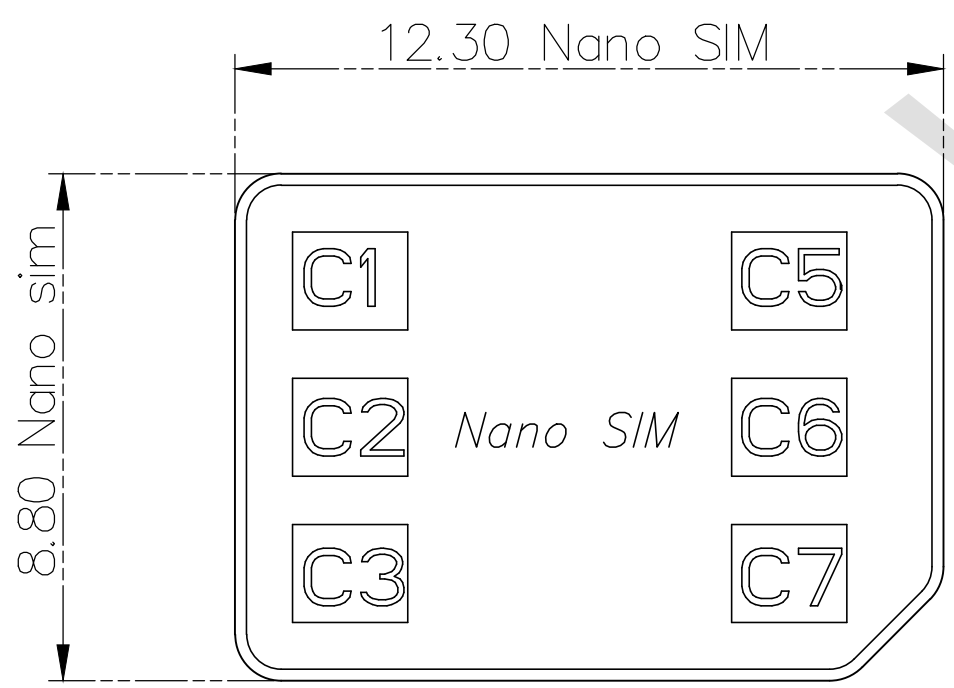

DESIGN	MISS ZENG	SC ALL			未注公差 T00LERANCE		品名: NANO-SIM 掀盖式1.40H 6P 型号: HH-0251AAAG06A
DRAWIGN	MISS LI	ANIT	MM		X. X ±0.15	ANGULAR:±1°	
CHECK	Mr. ZENG	SIZE	A4: 210*297		X.XX ±0.10		
APPROVAL		VERSION	01		X. XXX ±0.05		



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.