

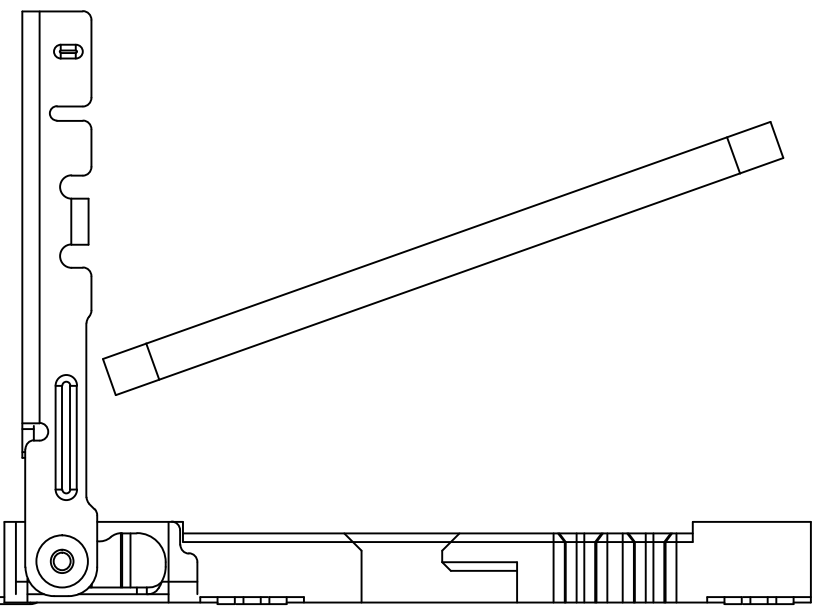



* 所有原料材质, 生产制程, 电镀必须符合ROHS要求

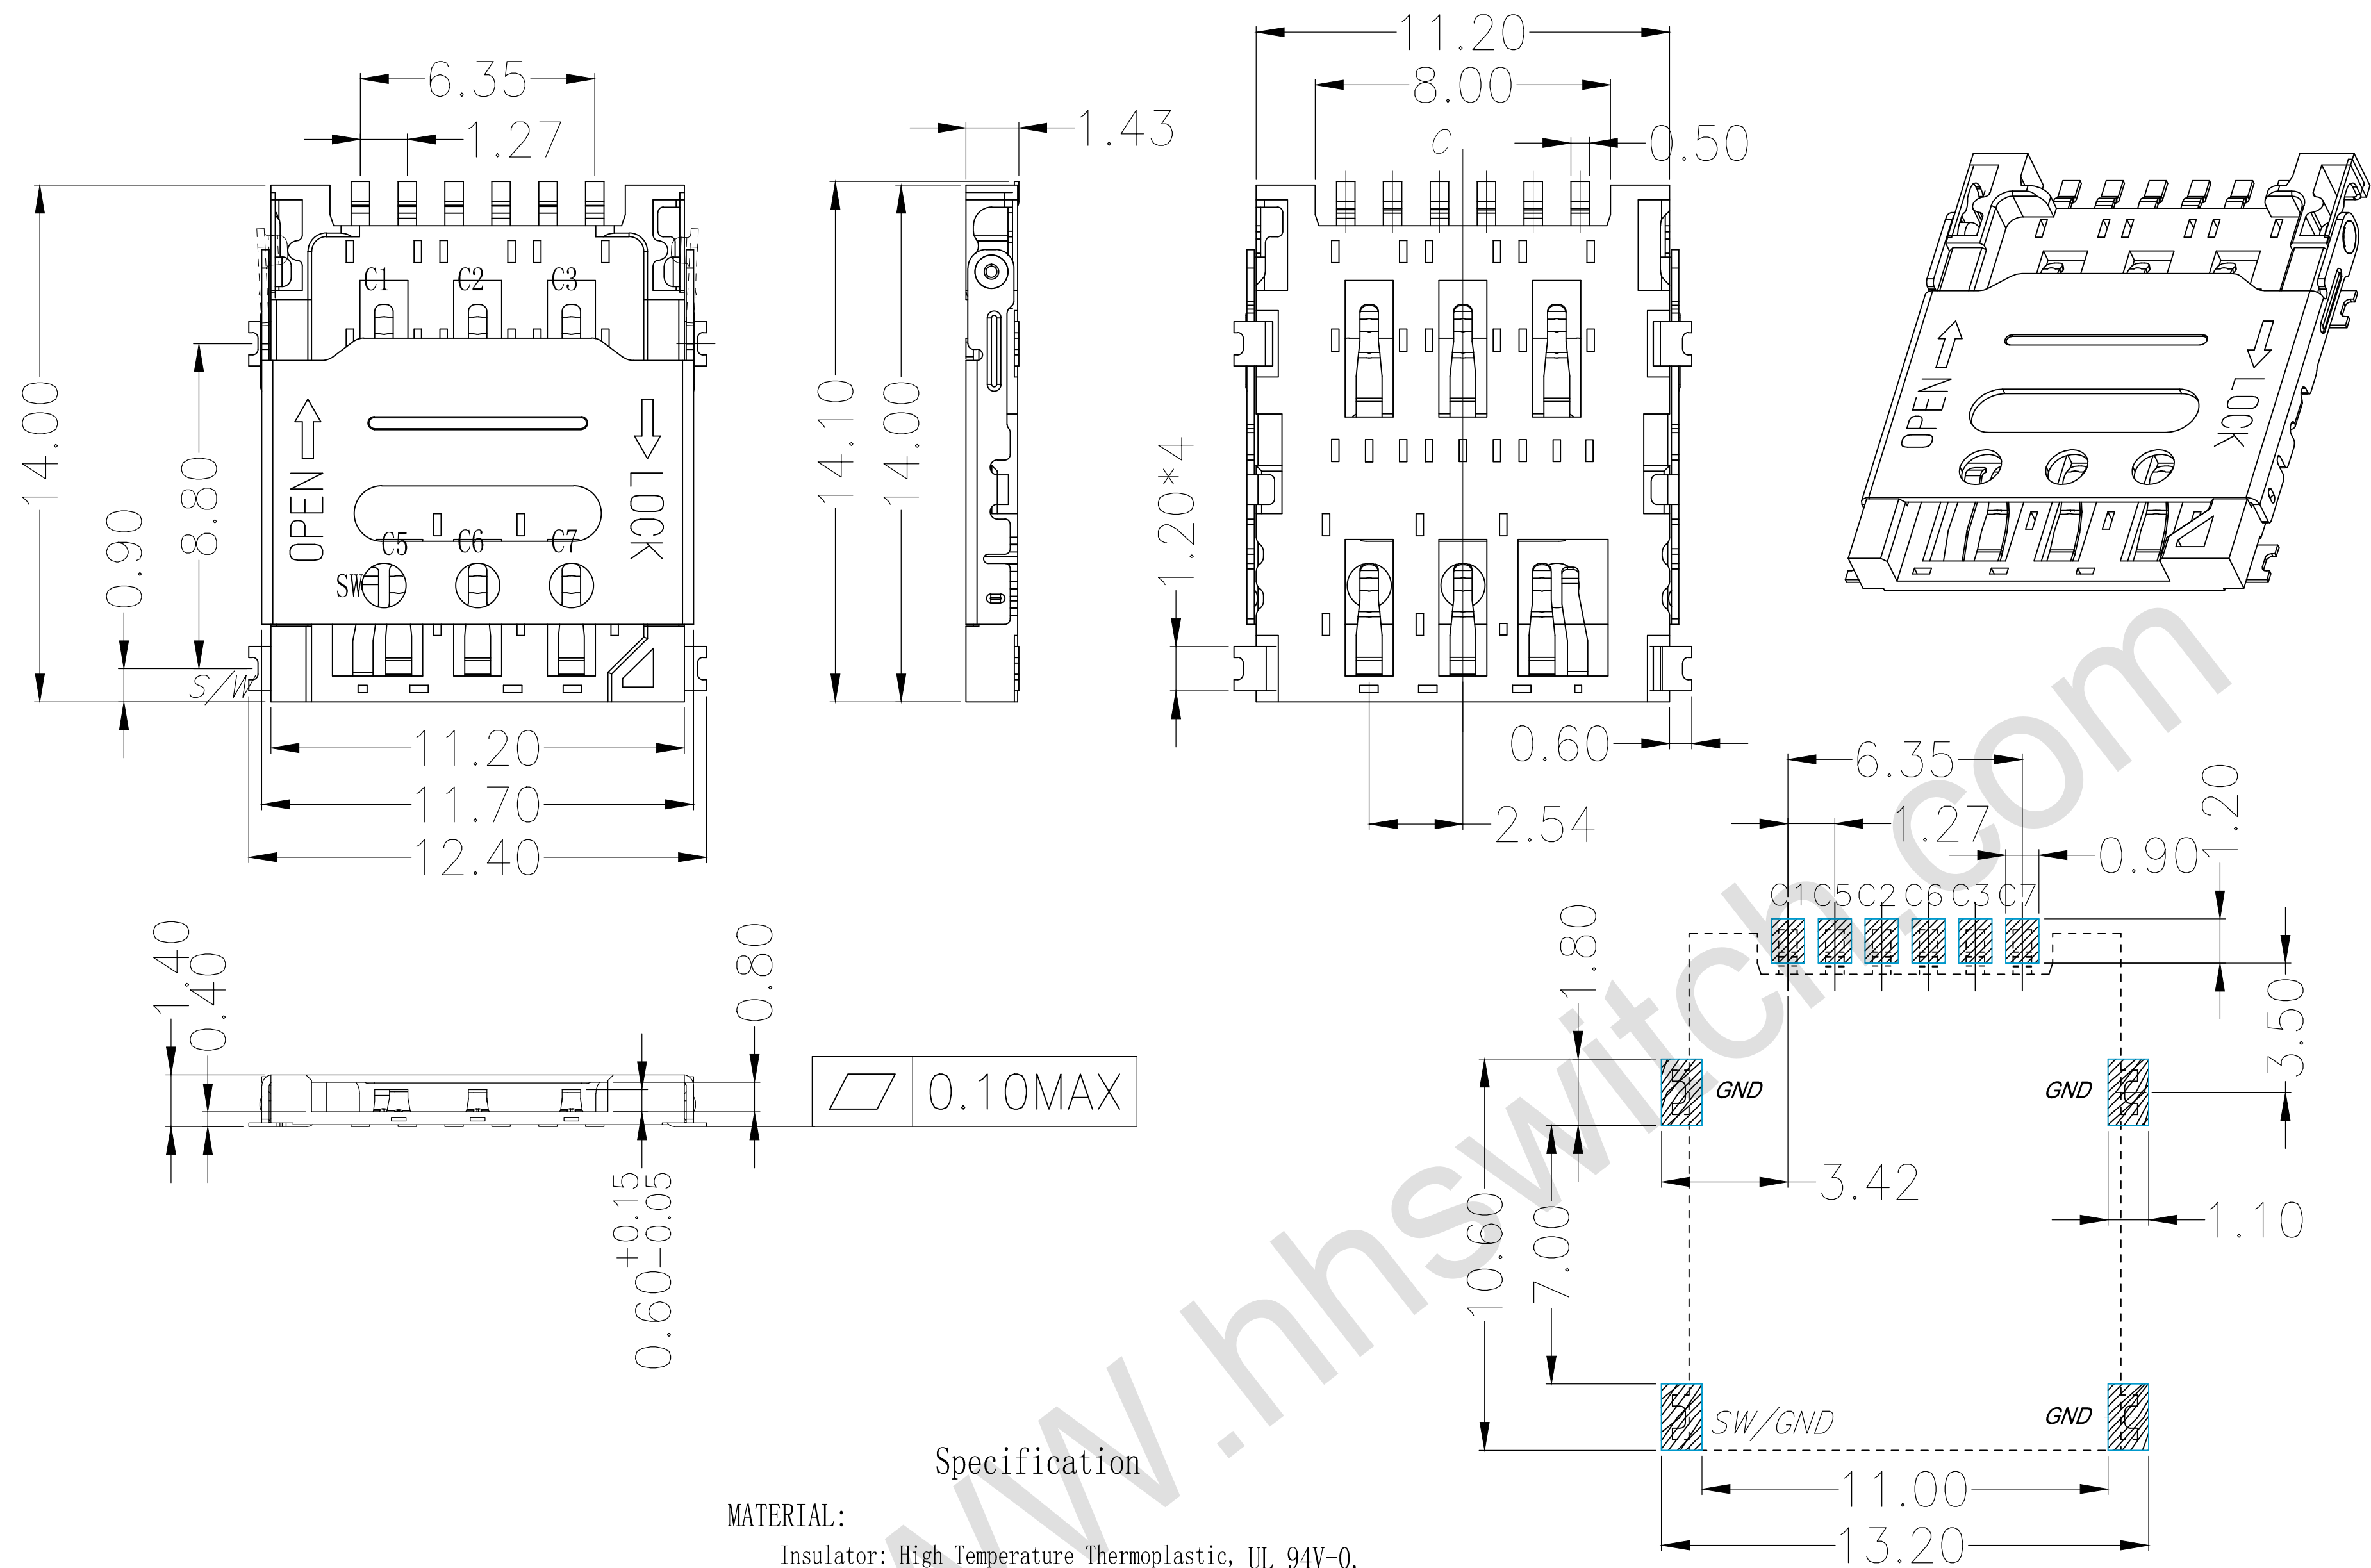

STEP 1 INSERT NANO SIM CARD

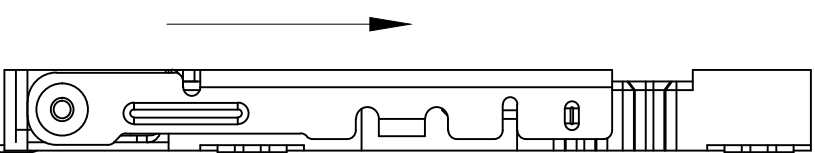


STEP 2 PUSH THE SHELL



STEP 3 FINISH

Circuit Diagram for Card Detect Switch

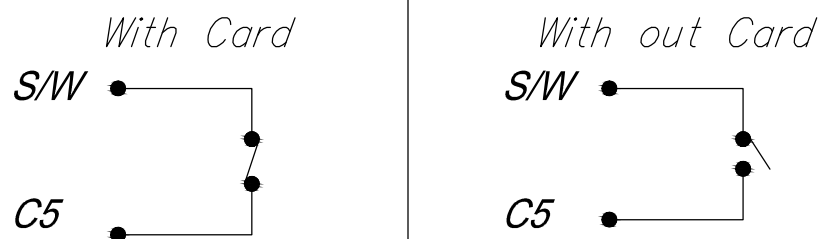

PIN NO.	PIN NAME
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O
S/W	SWTSH PIN

Specification

MATERIAL:

Insulator: High Temperature Thermoplastic, UL 94V-0.
Contact: Copper Alloy
SHELL: SUS

PLATING:

Contact: Plated 50u'' Ni Overall Contact ALL Au 1U,
Shell: clean

Electrical:

Current Rating :0.5Amps max
Voltage Rating :5V AC/DC
Ambient Temperature Range :-40° C~+85° C
Storage Temperature Range :-40° C~+85° C
Ambient Humidity Range :95% R.H. Max.
Contact Resistance:80m Ω max.
Insulation Resistance:100M Ω min./100V DC
Mating Cycles:5,000 Insertions
Reflow peak temp.: 260° C $\pm$ 5° C, 3~5 S

PCB 焊盘区
RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE $\pm$ 0.05



DESIGN	MISS ZENG	SC ALL		未注公差 T00LERANCE	品名:
DRAWIGN	MISS LI	ANIT	MM	X. X $\pm$ 0.15	NANO-SIM 掀盖式1.40H 7P带开关
CHECK	Mr. ZENG	SIZE	A4: 210*297	X.XX $\pm$ 0.10	型号:
APPROVAL		VERSION	01	X. XXX $\pm$ 0.05	HH-0251AAAG07A



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.