
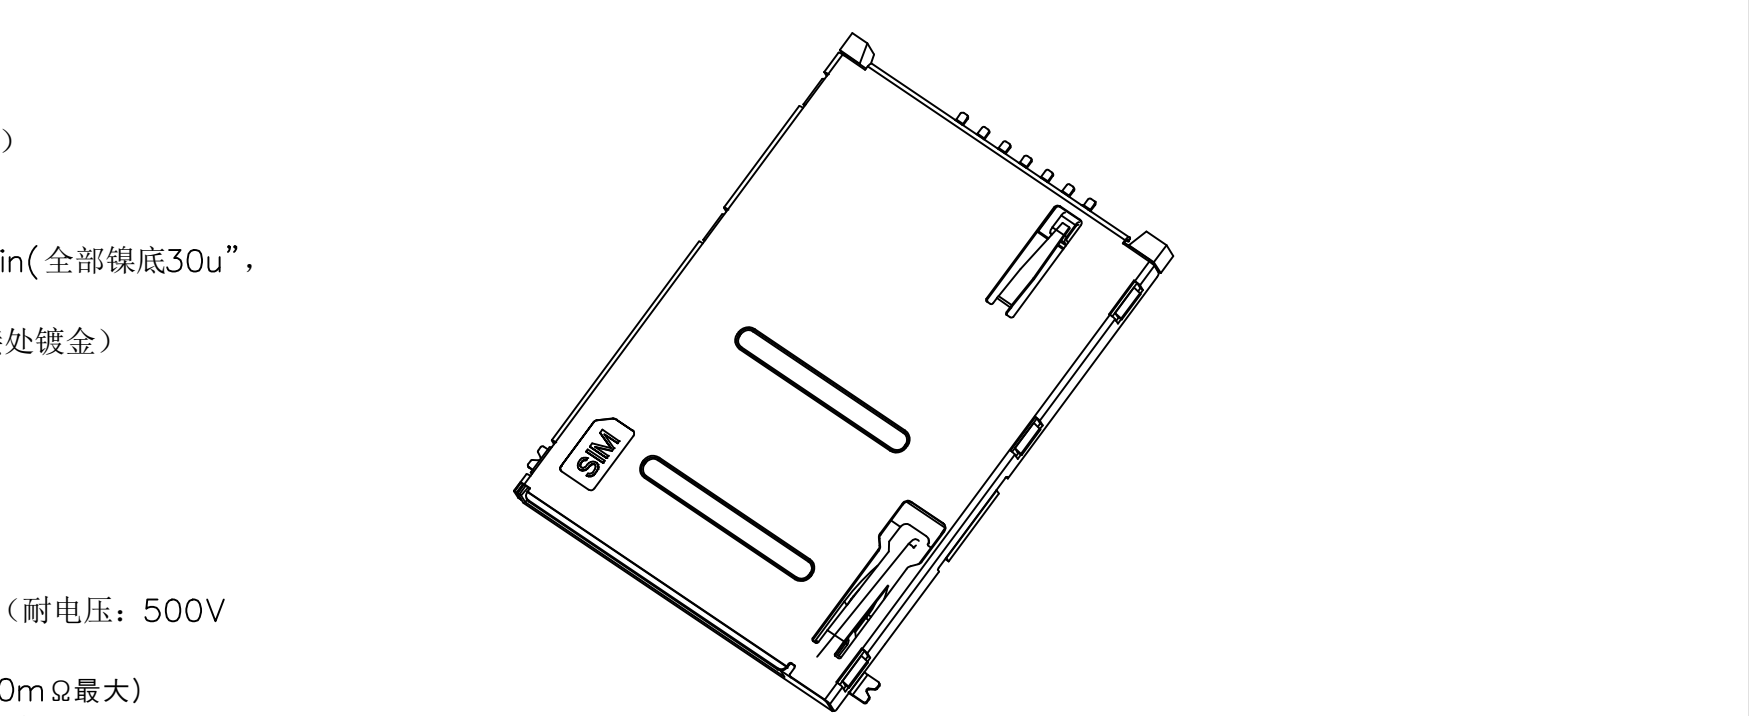


* 所有原料材质,生产制程,电镀必须符合ROHS要求

RECOMMENDED PCB LAYOUT

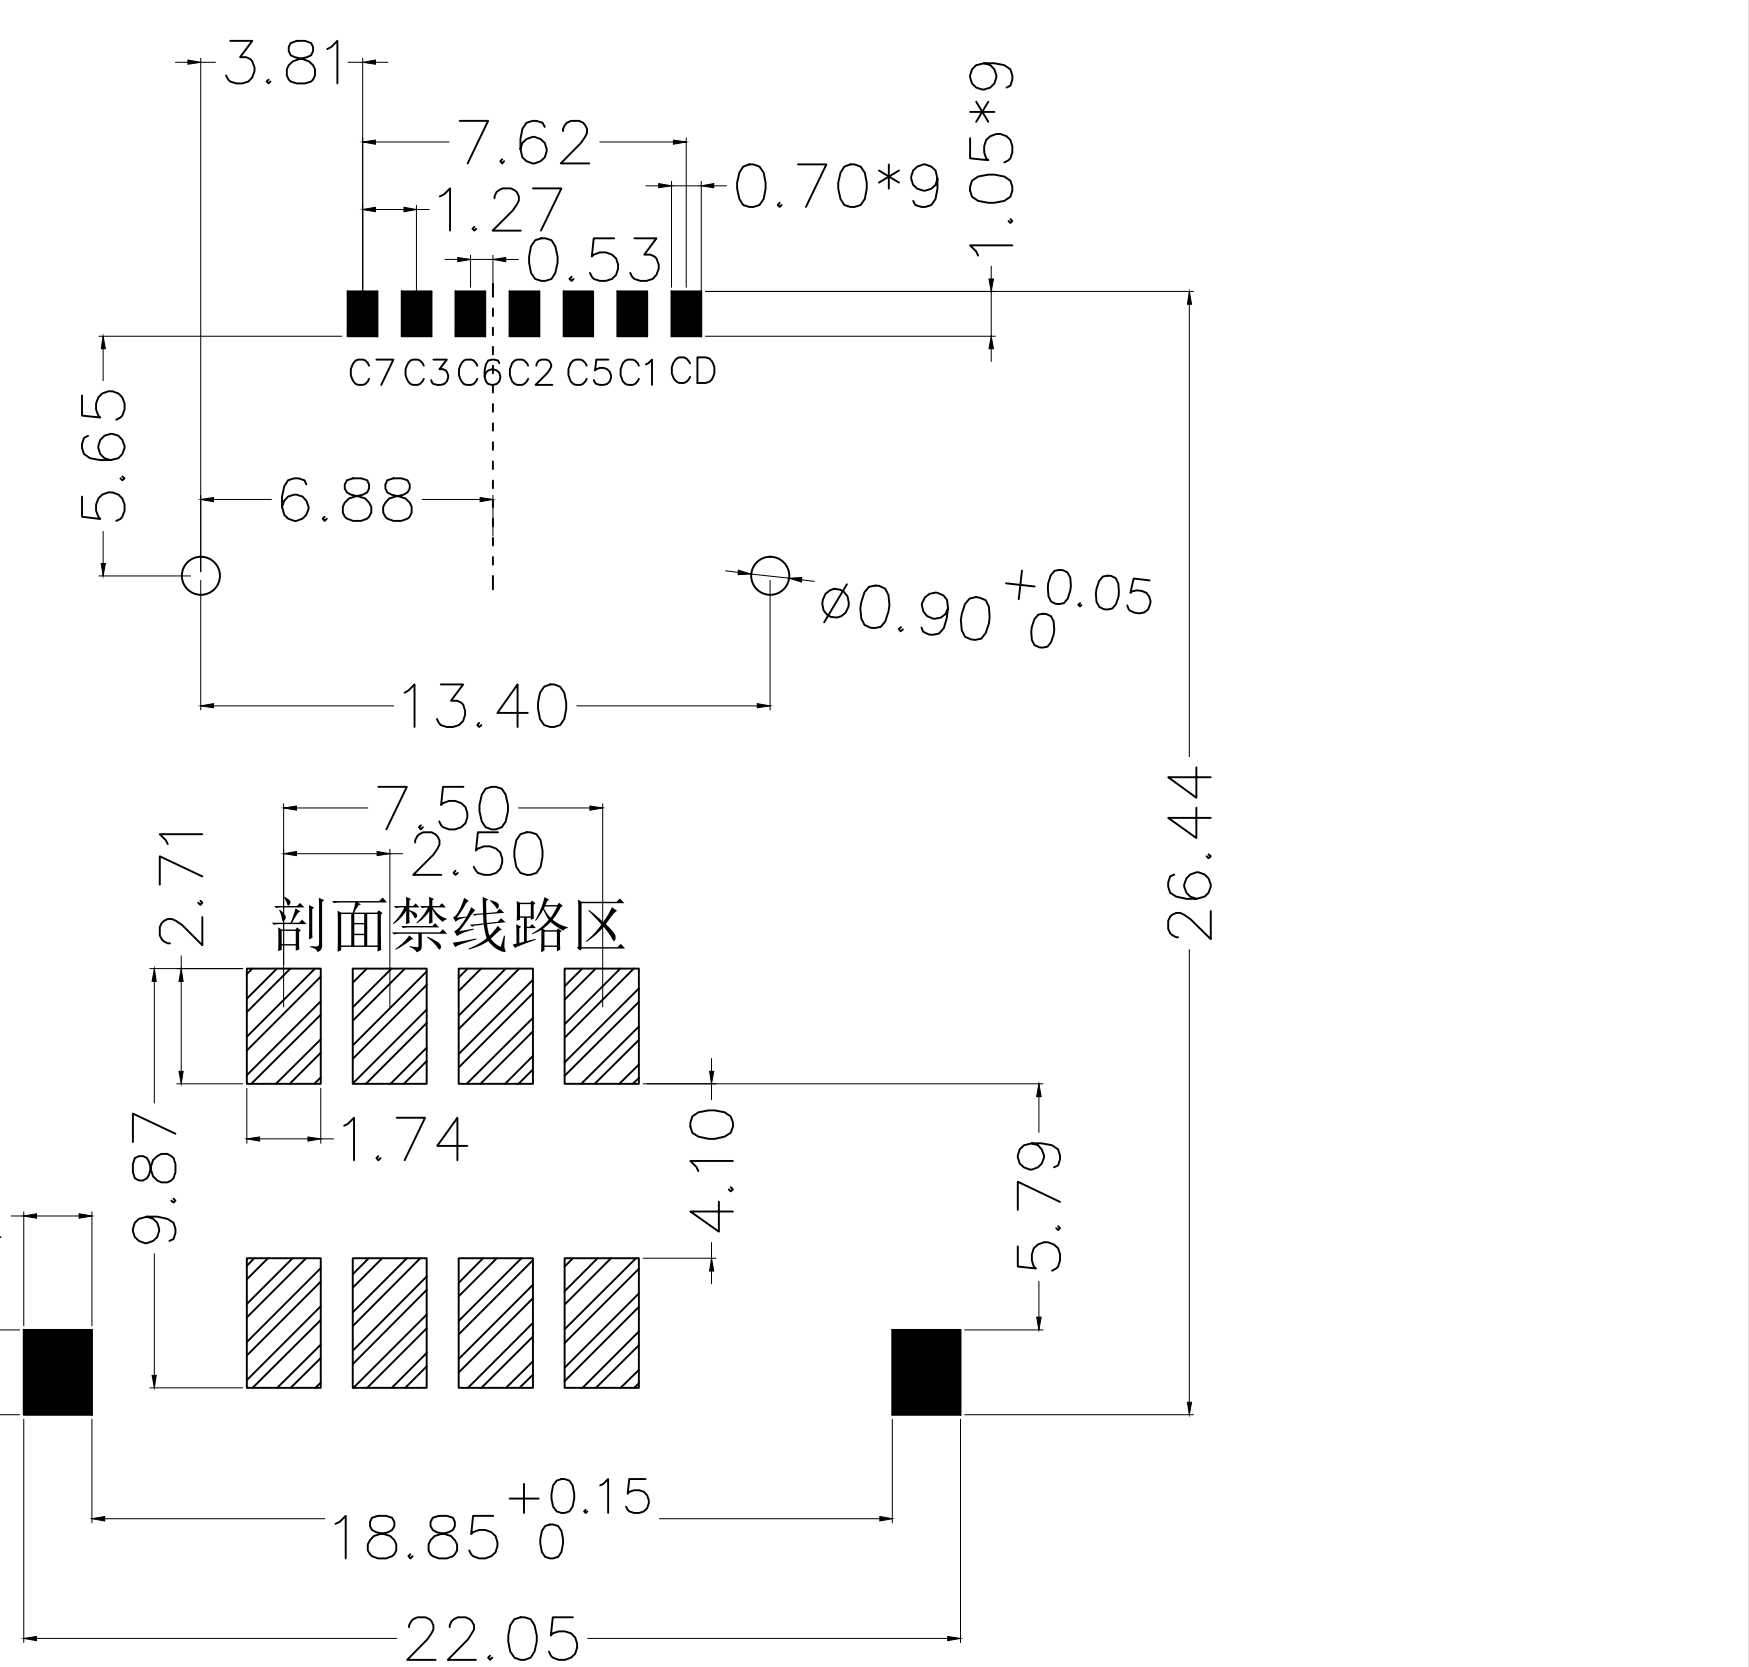

Notes:

1. Material:

Housing: LCP Color: black (塑胶材质: LCP 94-V0 黑色)

Contact: Phosphor Bronze. (端子材质: 磷青铜)

SHELL: SUS (外壳材质: 不锈钢)

2. All Ni30u"Min Contact 1u",solder area Tin 30u/min(全部镍底30u", 接触点1u", 焊接处锡30u")

3. shell Ni 30" min ,solder gold Flash (镍底30u",焊接处镀金)

1. Material:
Housing: LCP Color: black (塑胶材质: LCP 94-V0 黑色)
Contact: Phosphor Bronze. (端子材质: 磷青铜)
SHELL: SUS (外壳材质: 不锈钢)

2. All Ni30u"Min Contact 1u", solder area Tin 30u/min (全部镍底30u", 接触点1u", 焊接处锡30u")

3. shell Ni 30" min ,solder gold Flash (镍底30",焊接处镀金)

Housing: LCP Color: black (塑胶材质: LCP 94-V0 黑色)
Contact: Phosphor Bronze. (端子材质: 磷青铜)
SHELL: SUS (外壳材质: 不锈钢)

2. All Ni30u"Min Contact 1u", solder area Tin 30u/min(全部镀底30u", 接触点1u", 焊接处锡30u")

3. shell Ni 30 min ,solder gold Flash (镀底30u", 焊接处镀金)

Contact: Phosphor Bronze. (端子材质: 磷青铜)
SHELL: SUS (外壳材质: 不锈钢)

2. All Ni30u"Min Contact 1u", solder area Tin 30u/min(全部镍底30u", 接触点1u", 焊接处锡30u")
3. shell Ni 30" min ,solder gold Flash (镍底30u", 焊接处镀金)

SHELL: SUS (外壳材质: 不锈钢)

2. All Ni30u"Min Contact 1u",solder area Tin 30u/min(全部镍底30u", 接触点1u", 焊接处锡30u")
3. shell Ni 30" min ,solder gold Flash (镍底30"u,焊接处镀金)

2. All Ni30u"Min Contact 1u",solder area Tin 30u/min(全部镍底30u",接触点1u",焊接处锡30u")

3. shell Ni 30" min ,solder gold Flash (镍底30"u,焊接处镀金)

3. shell Ni 30" min ,solder gold Flash (镍底30"u,焊接处镀金)

3. shell Ni 30" min ,solder gold Flash (镍底30u,焊接处镀金)

SPECIFICATION:

3.DURABILITY: 5000 CYCLES MIN(寿命:5000次最小)

4.CURRENT: 0.5A (额定电流: 0.5Amps)

5.VOLTAGE: 40V MAX(额定电压: 40V最大)

6. WITHSTANDING VOLTAGE: 500V AC MIN. (UNMATED) (耐电压: 500V)

AC最小)

7.CONTACT RESISTANCE: 30mΩ MAX. (端子接触电阻: 30mΩ最大)

8.INSULATION RESISTANCE:1000MΩ MIN.(UNMATED) (绝缘阻抗:1000兆

欧最小)


9.OPERATING TEMPERATURE RANGE: -40.C TO +85.C (工作环境: -

40度到+80度)

10.ALL THE MATERIAL SHOULD COMPLY WITH THE ROHS (全部材质

符合ROHS)

SIM pin assignment	
PIN#	Name
C1	VCC 电压
C2	RST 重置
C3	CLK 时钟
C4	Reserved 备用
C5	GND 接地
C6	VPP 电压
C7	I/O 输入输出
C8	Reserved 备用

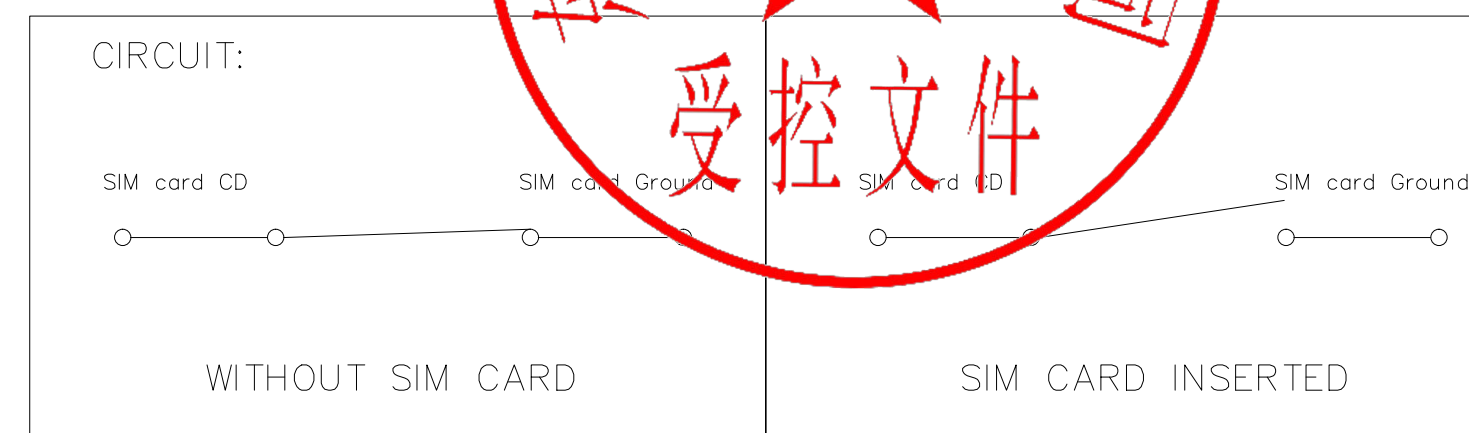

DESIGN	MISS ZENG	SC ALL			未注公差 T00LERANCE		品名:
DRAWIGN	MISS LI	ANIT	MM		X. X ± 0.20	X. XXX ± 0.05	SIM PUSH 6P+1P有柱右开关前脚
CHECK	Mr. ZENG	SIZE	A4: 210*297		X.XX ± 0.10	ANGULAR: $\pm 1^{\circ}$	型号:
APPROVAL		VERSION	01				HH-0291BAAG07A



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.