
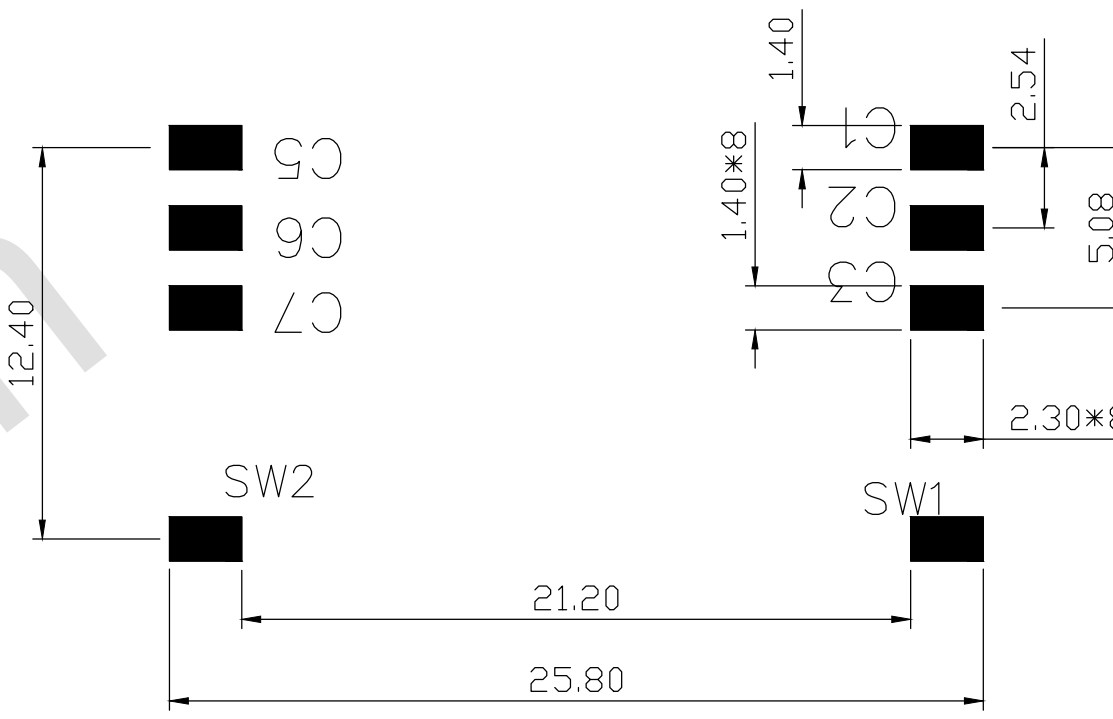
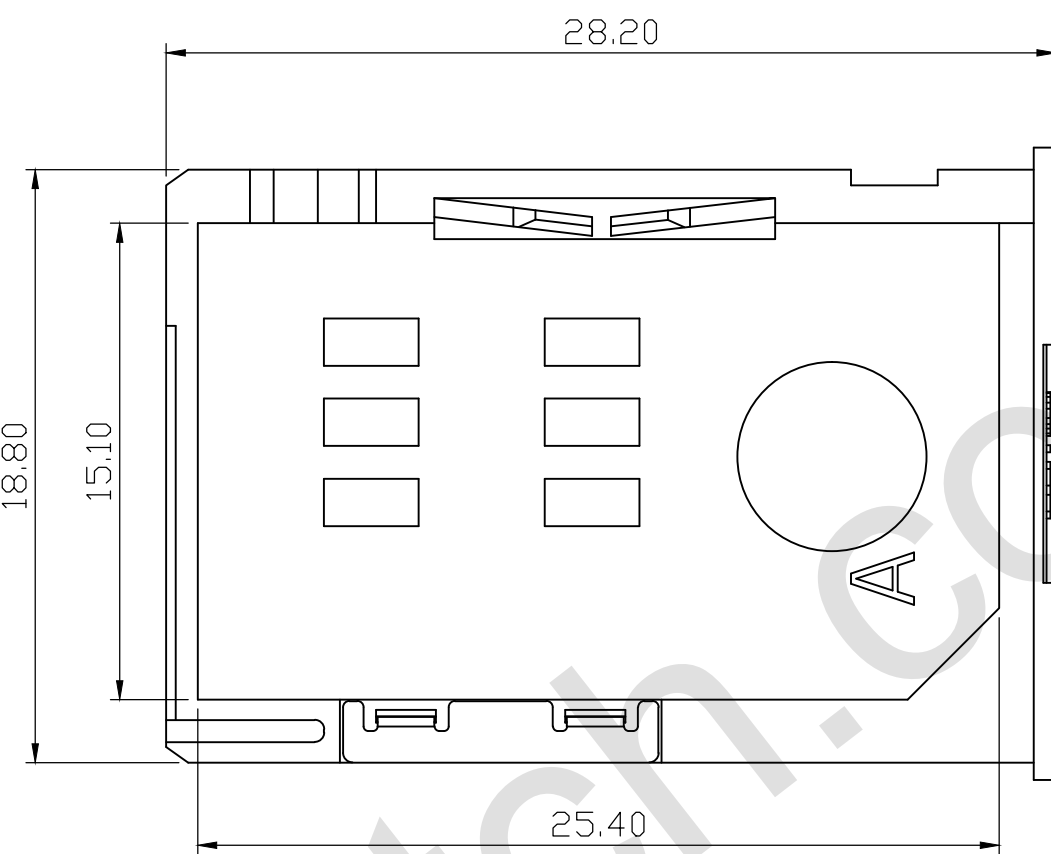


* 所有原料材质, 生产制程, 电镀必须符合ROHS要求

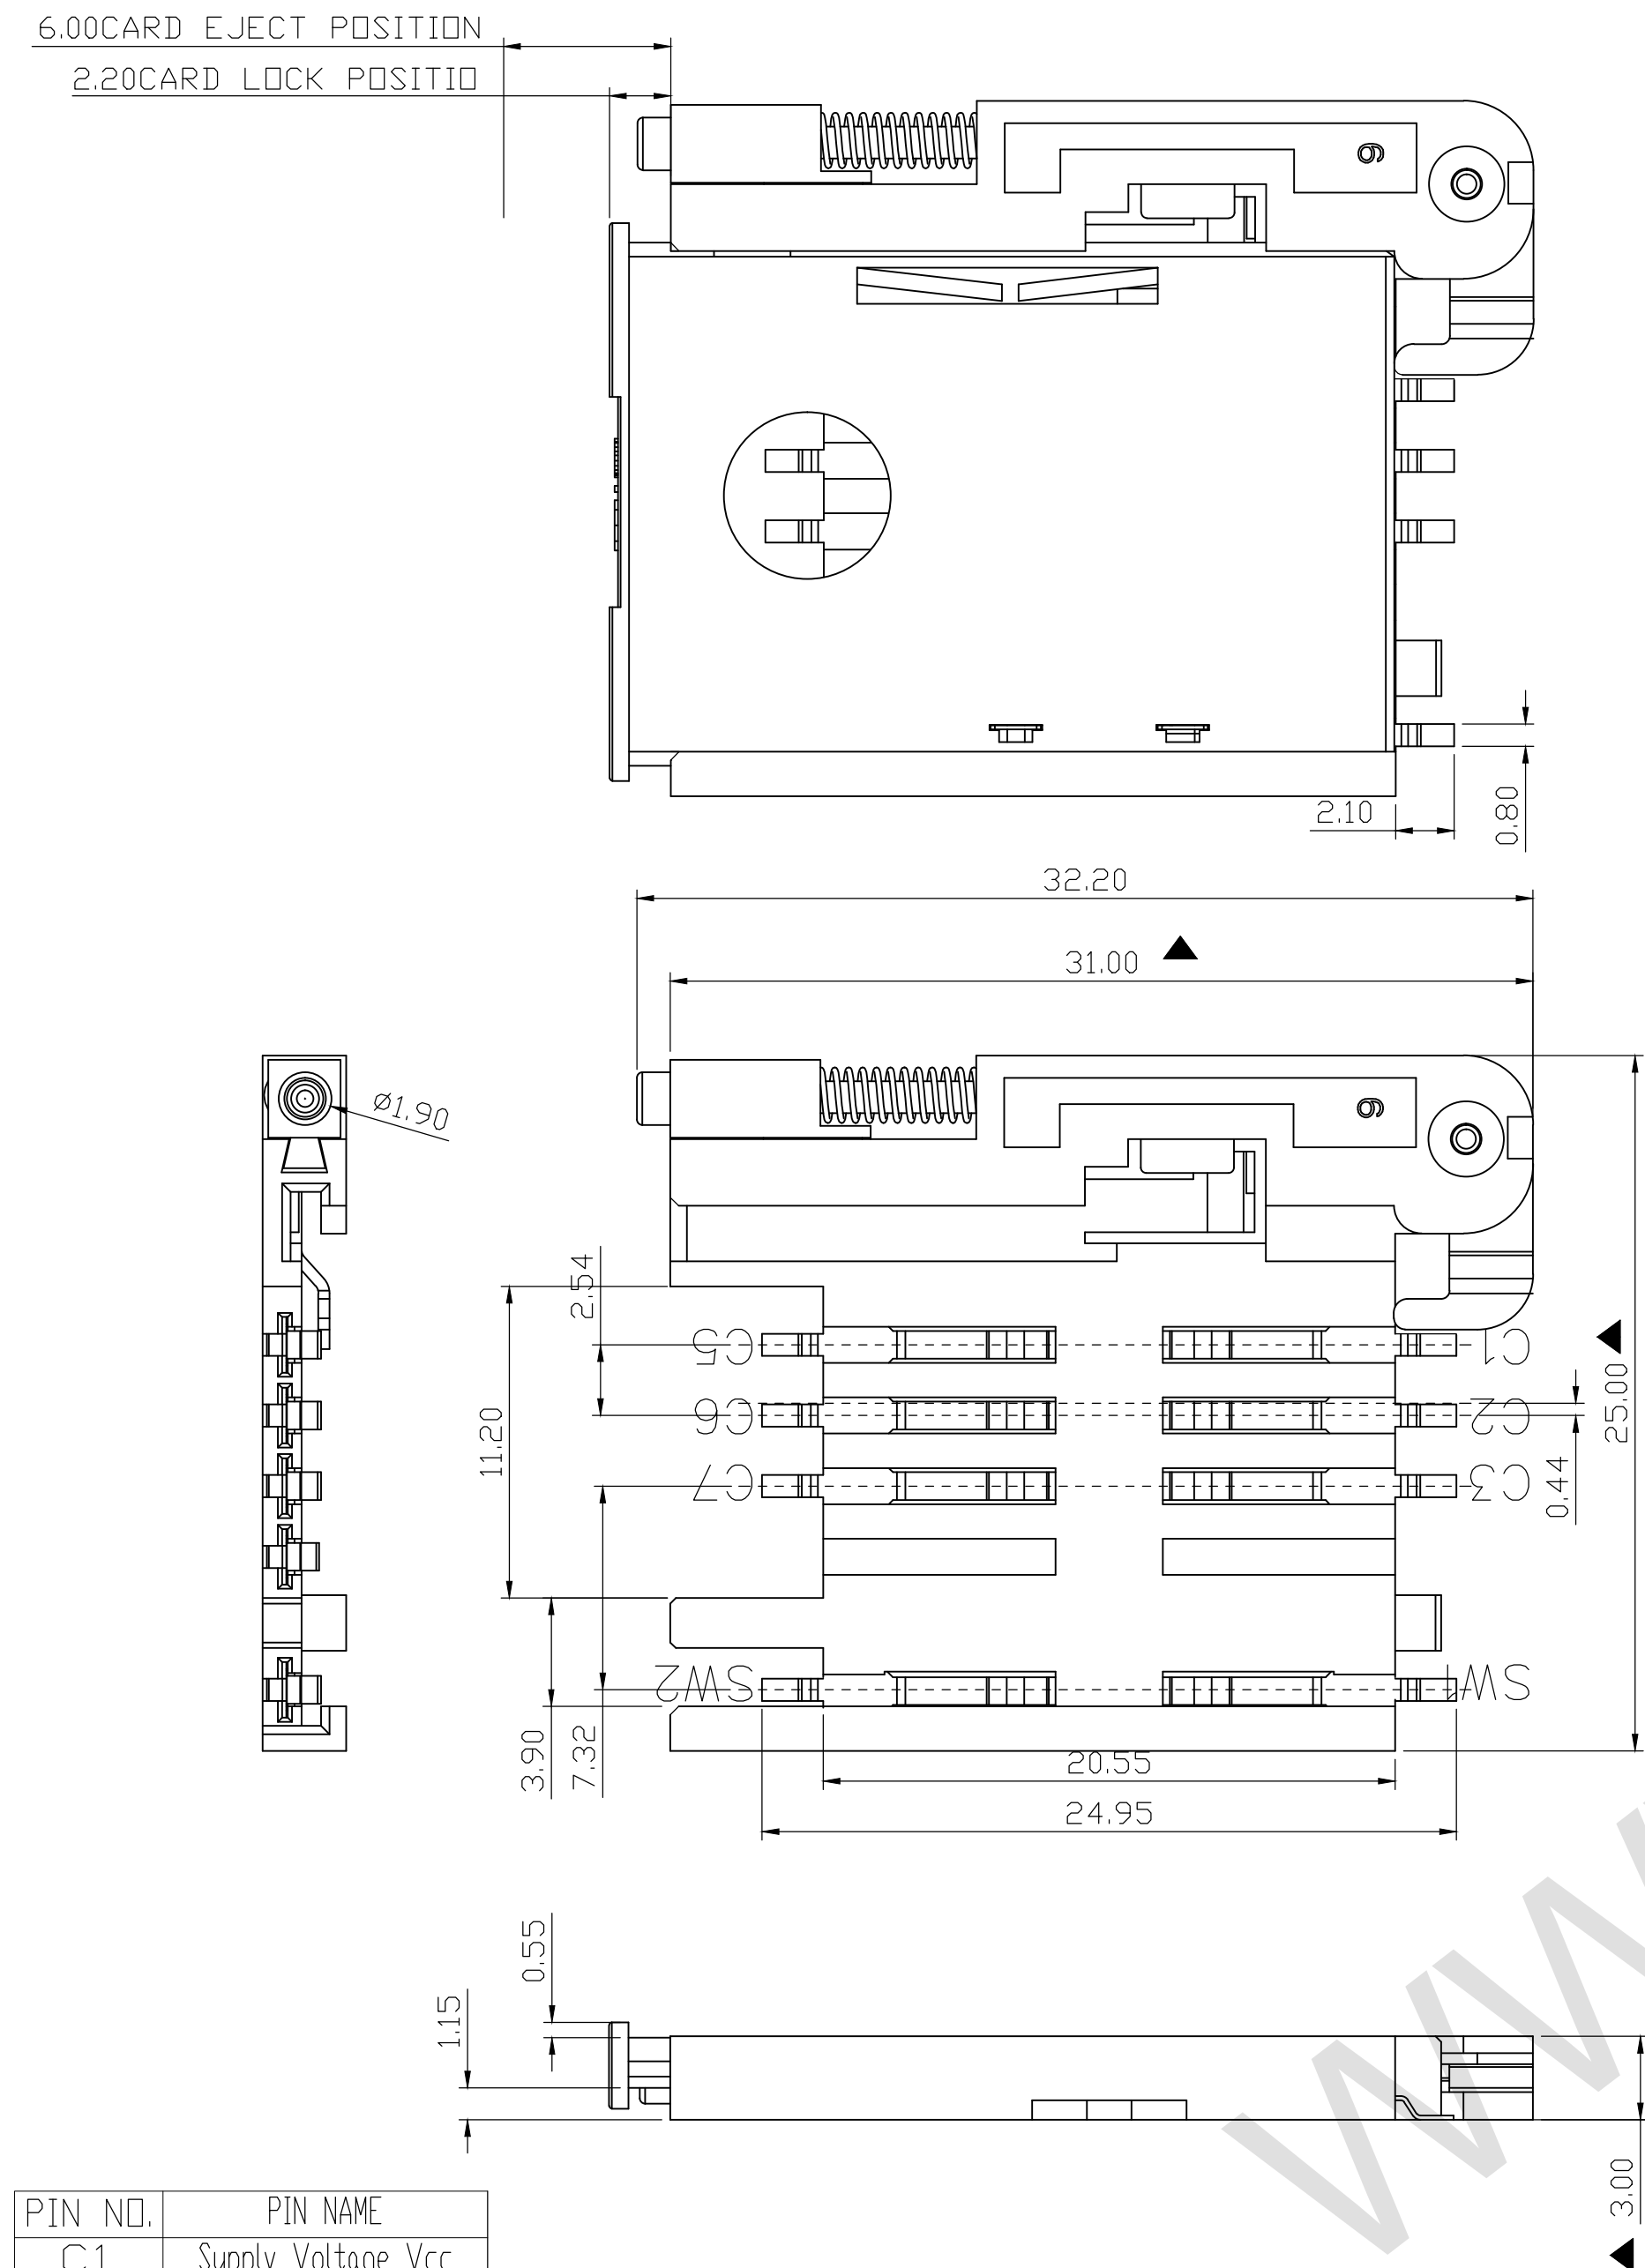

PCB AREA
RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

Specification

MATERIAL:
Insulator: High Temperature Thermoplastic,
(塑胶: 黑色LCP, 防火等级UL 94V-0)
帽子: LCP
Contact: Copper Alloy (铜) T=0.15mm
盖卡托: PA
PLATING:
Contact: Plated 50u'' Ni Overall Contact Au 3U, pad TIN
(端子: 镍底50u, 接触点3u, 焊点锡50u最少)
Electrical:
Current Rating :2Amps, max(额定电流:2A最大)
Voltage Rating :5V AC/DC(额定电压:5V AC/DC)
Ambient Temperature Range :~40° C~+85° C(工作温度: ~40度到+85度)
Storage Temperature Range :~40° C~+85° C(工作环境: ~40度到+85度)
Ambient Humidity Range :95% R.H. Max. (上锡效果: 95%以上)
Contact Resistance:100mΩmax. (端子接触电阻: 100m 最大)
Insulation Resistance:1000MΩmin./500VDC(绝缘阻抗: 1000兆欧最小)
产品耐温温度: 260度
Mating Cycles:5000Min Insertions (寿命: 5000次)

PIN NO.	PIN NAME
C1	Supply Voltage Vcc
C2	Reset (RST)
C3	Clock (CLK)
C4	N/A
C5	Ground
C6	Programming Voltage Vpp
C7	I/O
C8	N/A

SW1	SW2	SW1	SW2
WITHOUT CARD		SIM INSERTED	

DESIGN	MISS ZENG	SC ALL		未注公差 T00LERANCE	品名:
DRAWIGN	MISS LI	ANIT	MM	X. X ±0.38	SIM 3.0H 卡托式 PUSH 带卡套
CHECK	Mr. ZENG	SIZE	A4: 210*297	X.XX ±0.25	型号:
APPROVAL		VERSION	01	X. XXX ±0.10	HH-0361DAAT08B



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.