


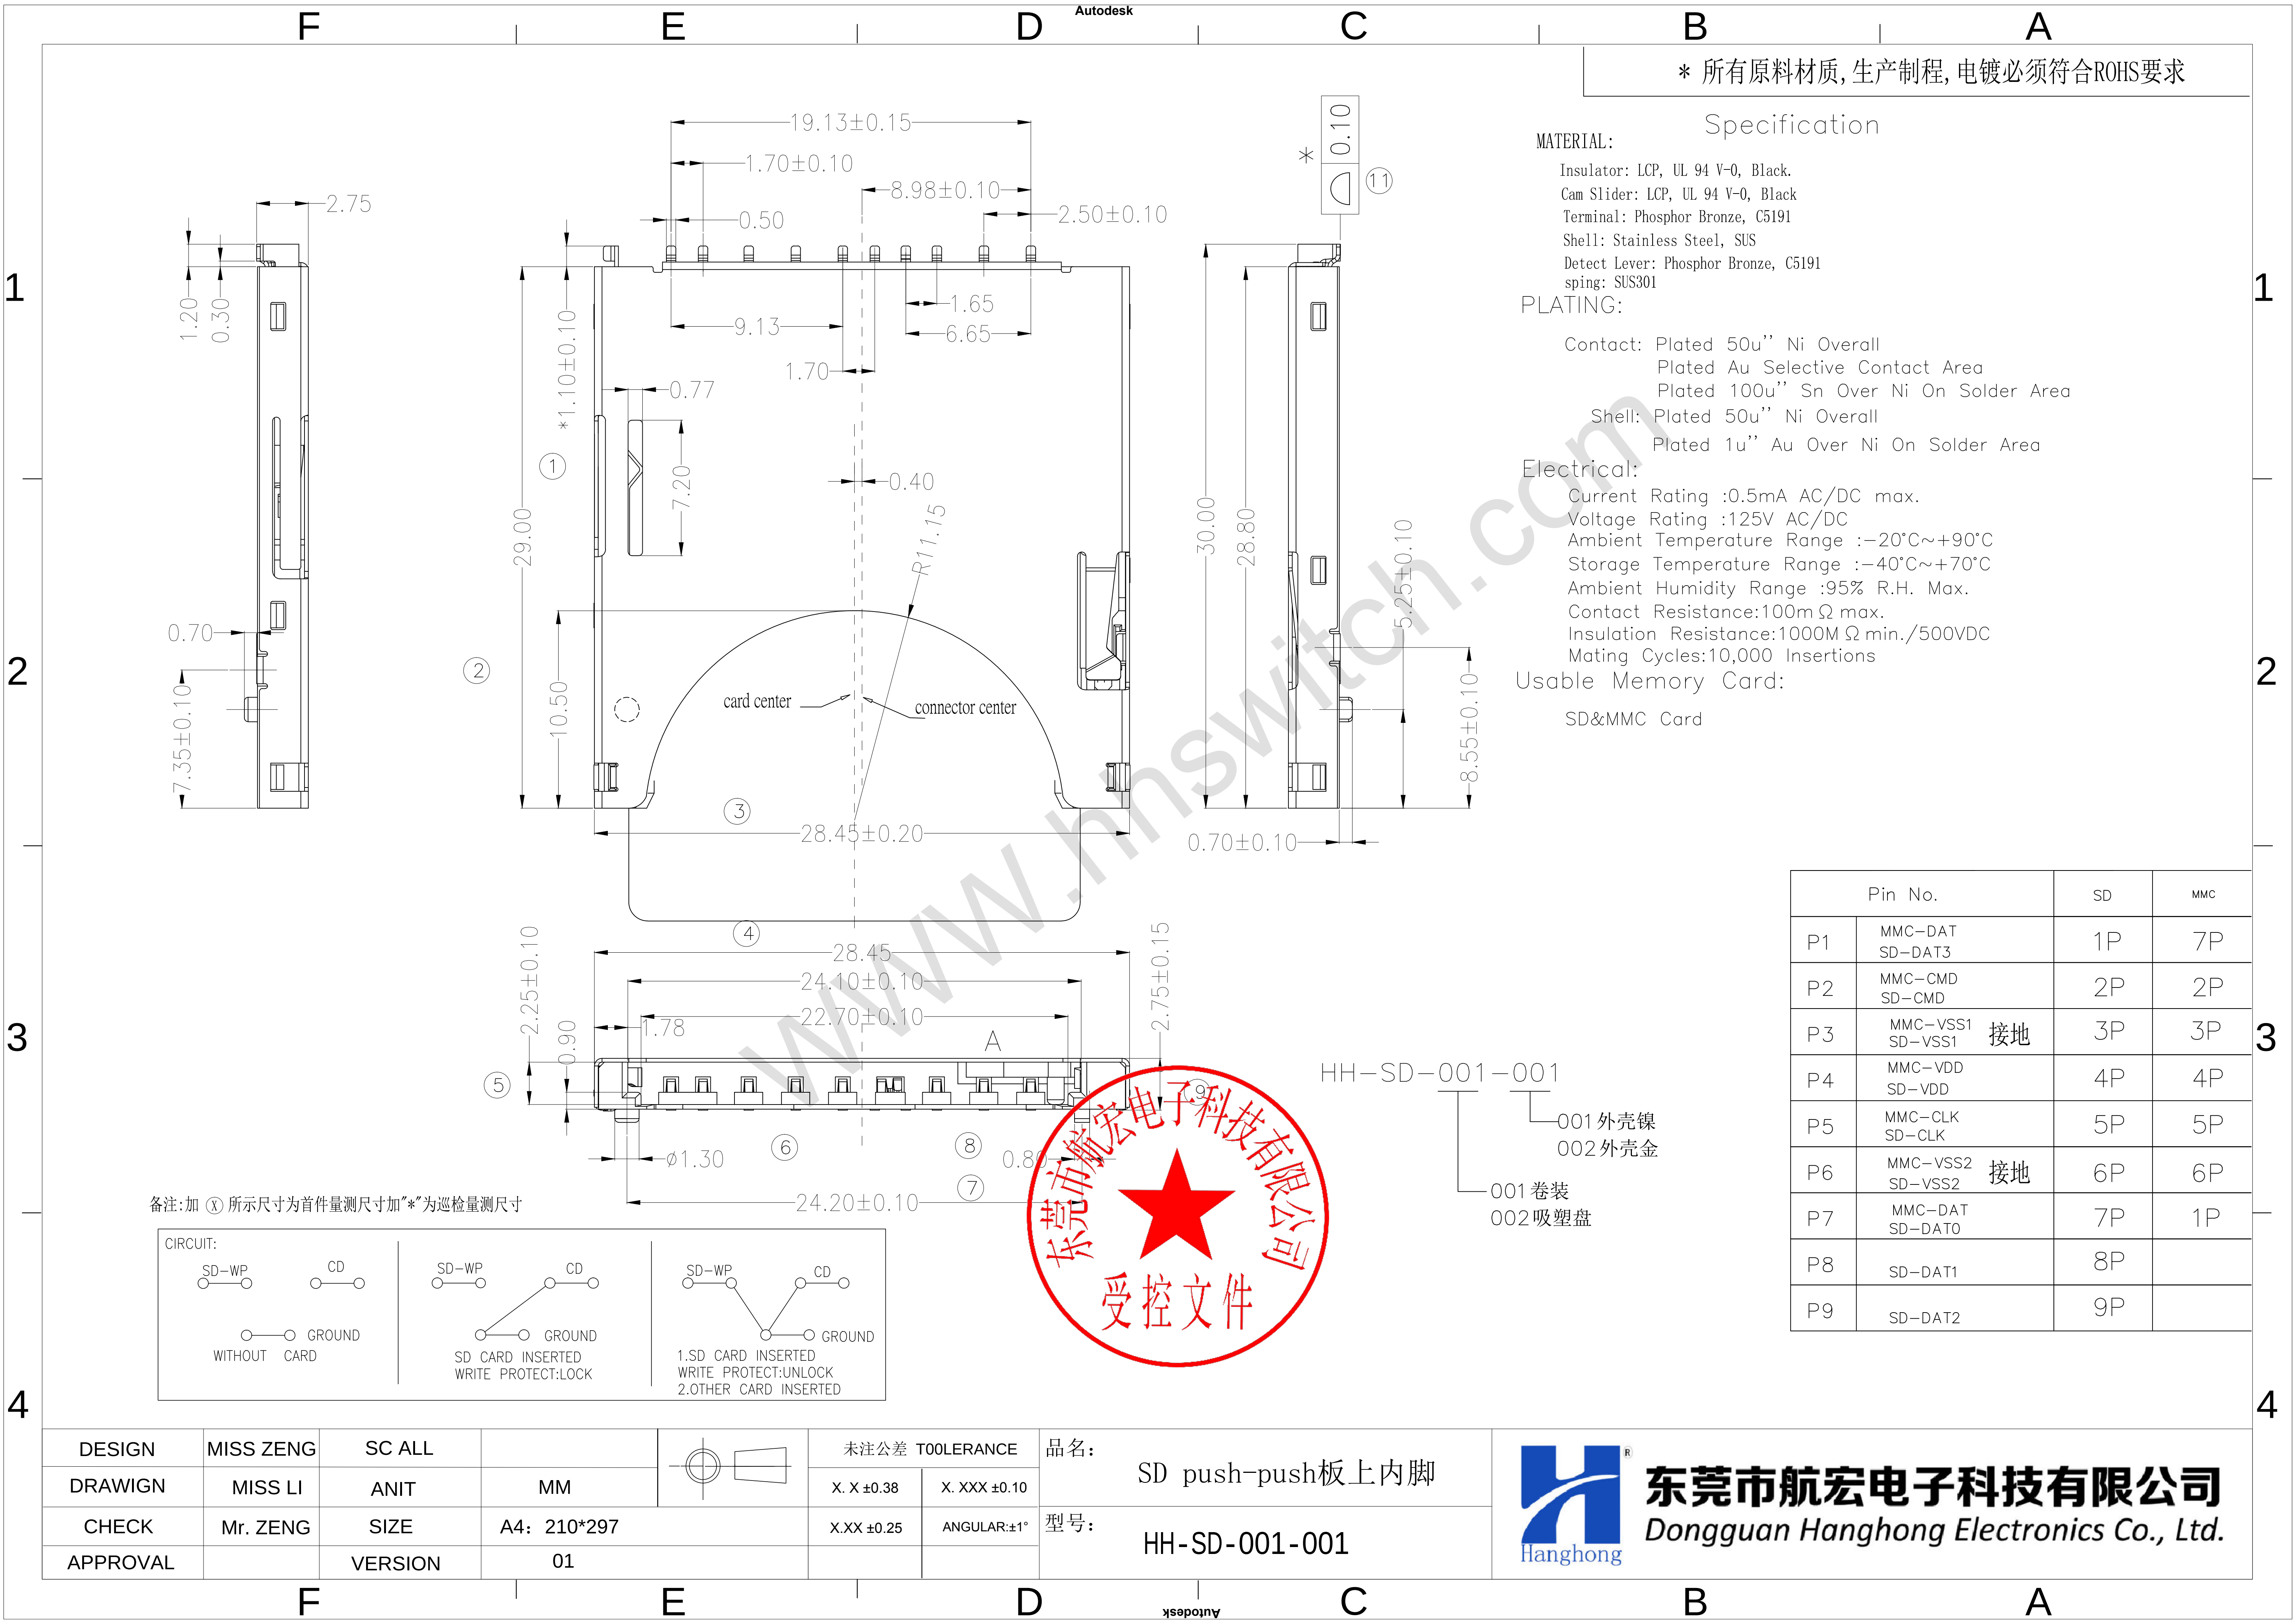

* 所有原料材质, 生产制程, 电镀必须符合ROHS要求

MATERIAL: Specification

Insulator: LCP, UL 94 V-0, Black.
Cam Slider: LCP, UL 94 V-0, Black
Terminal: Phosphor Bronze, C5191
Shell: Stainless Steel, SUS
Detect Lever: Phosphor Bronze, C5191
sping: SUS301

PLATING:

Contact: Plated 50u" Ni Overall
Plated Au Selective Contact Area
Plated 100u" Sn Over Ni On Solder Area
Shell: Plated 50u" Ni Overall
Plated 1u" Au Over Ni On Solder Area

Electrical:


Current Rating :0.5mA AC/DC max.
Voltage Rating :125V AC/DC
Ambient Temperature Range :-20°C~+90°C
Storage Temperature Range :-40°C~+70°C
Ambient Humidity Range :95% R.H. Max.
Contact Resistance:100mΩ max.
Insulation Resistance:1000MΩ min./500VDC
Mating Cycles:10,000 Insertions

Usable Memory Card:

SD&MMC Card

Pin No.		SD	MMC
P1	MMC-DAT SD-DAT3	1P	7P
P2	MMC-CMD SD-CMD	2P	2P
P3	MMC-VSS1 SD-VSS1 接地	3P	3P
P4	MMC-VDD SD-VDD	4P	4P
P5	MMC-CLK SD-CLK	5P	5P
P6	MMC-VSS2 SD-VSS2 接地	6P	6P
P7	MMC-DAT SD-DAT0	7P	1P
P8	SD-DAT1	8P	
P9	SD-DAT2	9P	

备注:加 ① 所示尺寸为首件量测尺寸加*为巡检量测尺寸

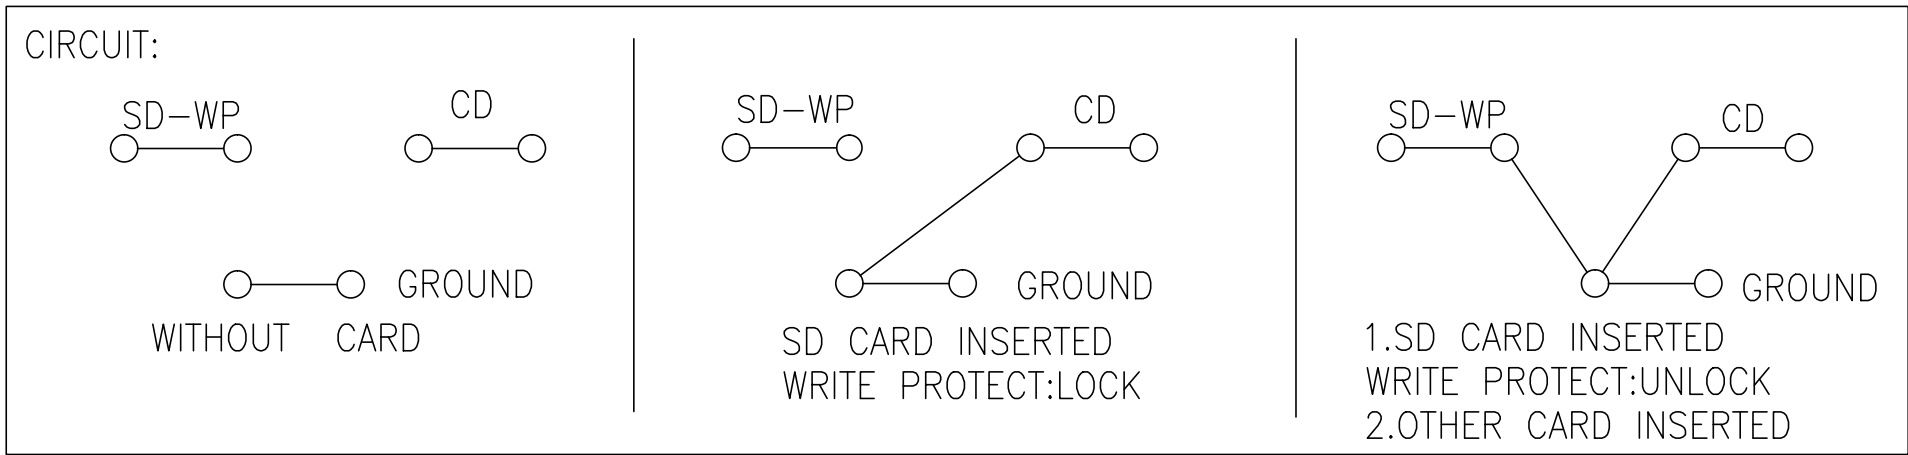


DESIGN	MISS ZENG	SC ALL			未注公差 T00LERANCE		品名: SD push-push板上内脚
DRAWIGN	MISS LI	ANIT	MM		X. X ±0.38	X. XXX ±0.10	
CHECK	Mr. ZENG	SIZE	A4: 210*297		X.XX ±0.25	ANGULAR:±1°	
APPROVAL		VERSION	01				





东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.

PIN ASSIGNMENT:

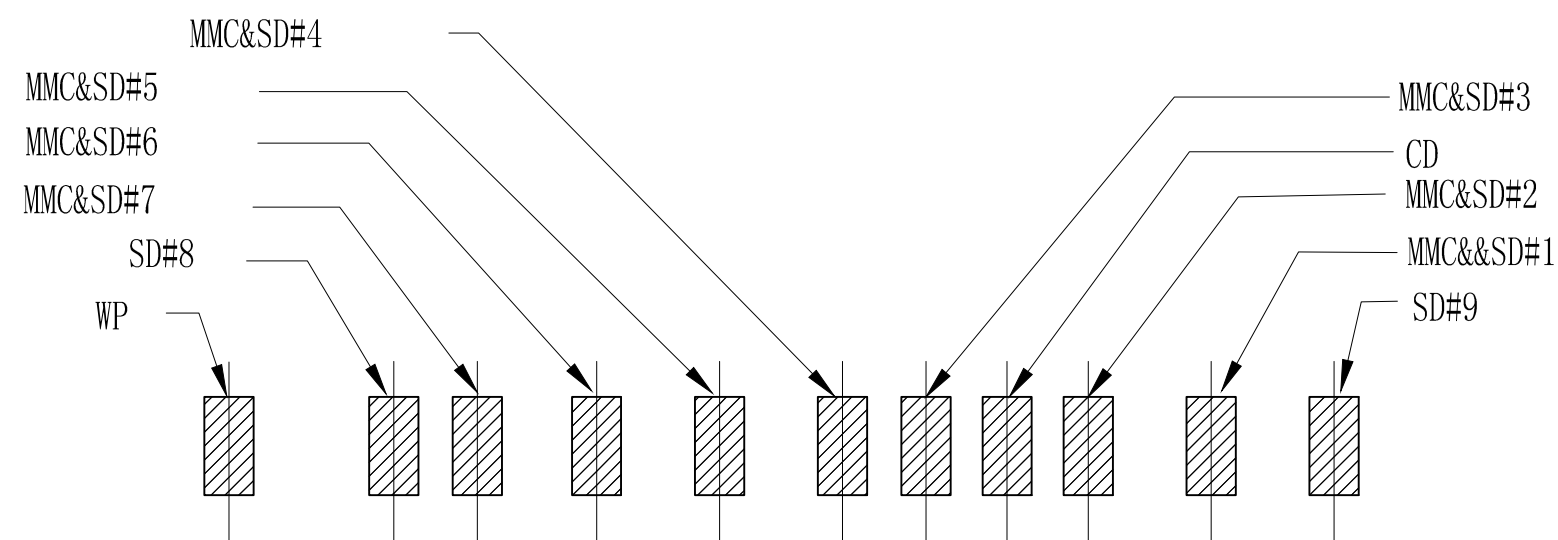

Recommend PCB Layout Drawing:
(Unit:mm .X ± 0.15 .XX ±0.05 .XXX ± 0.02)

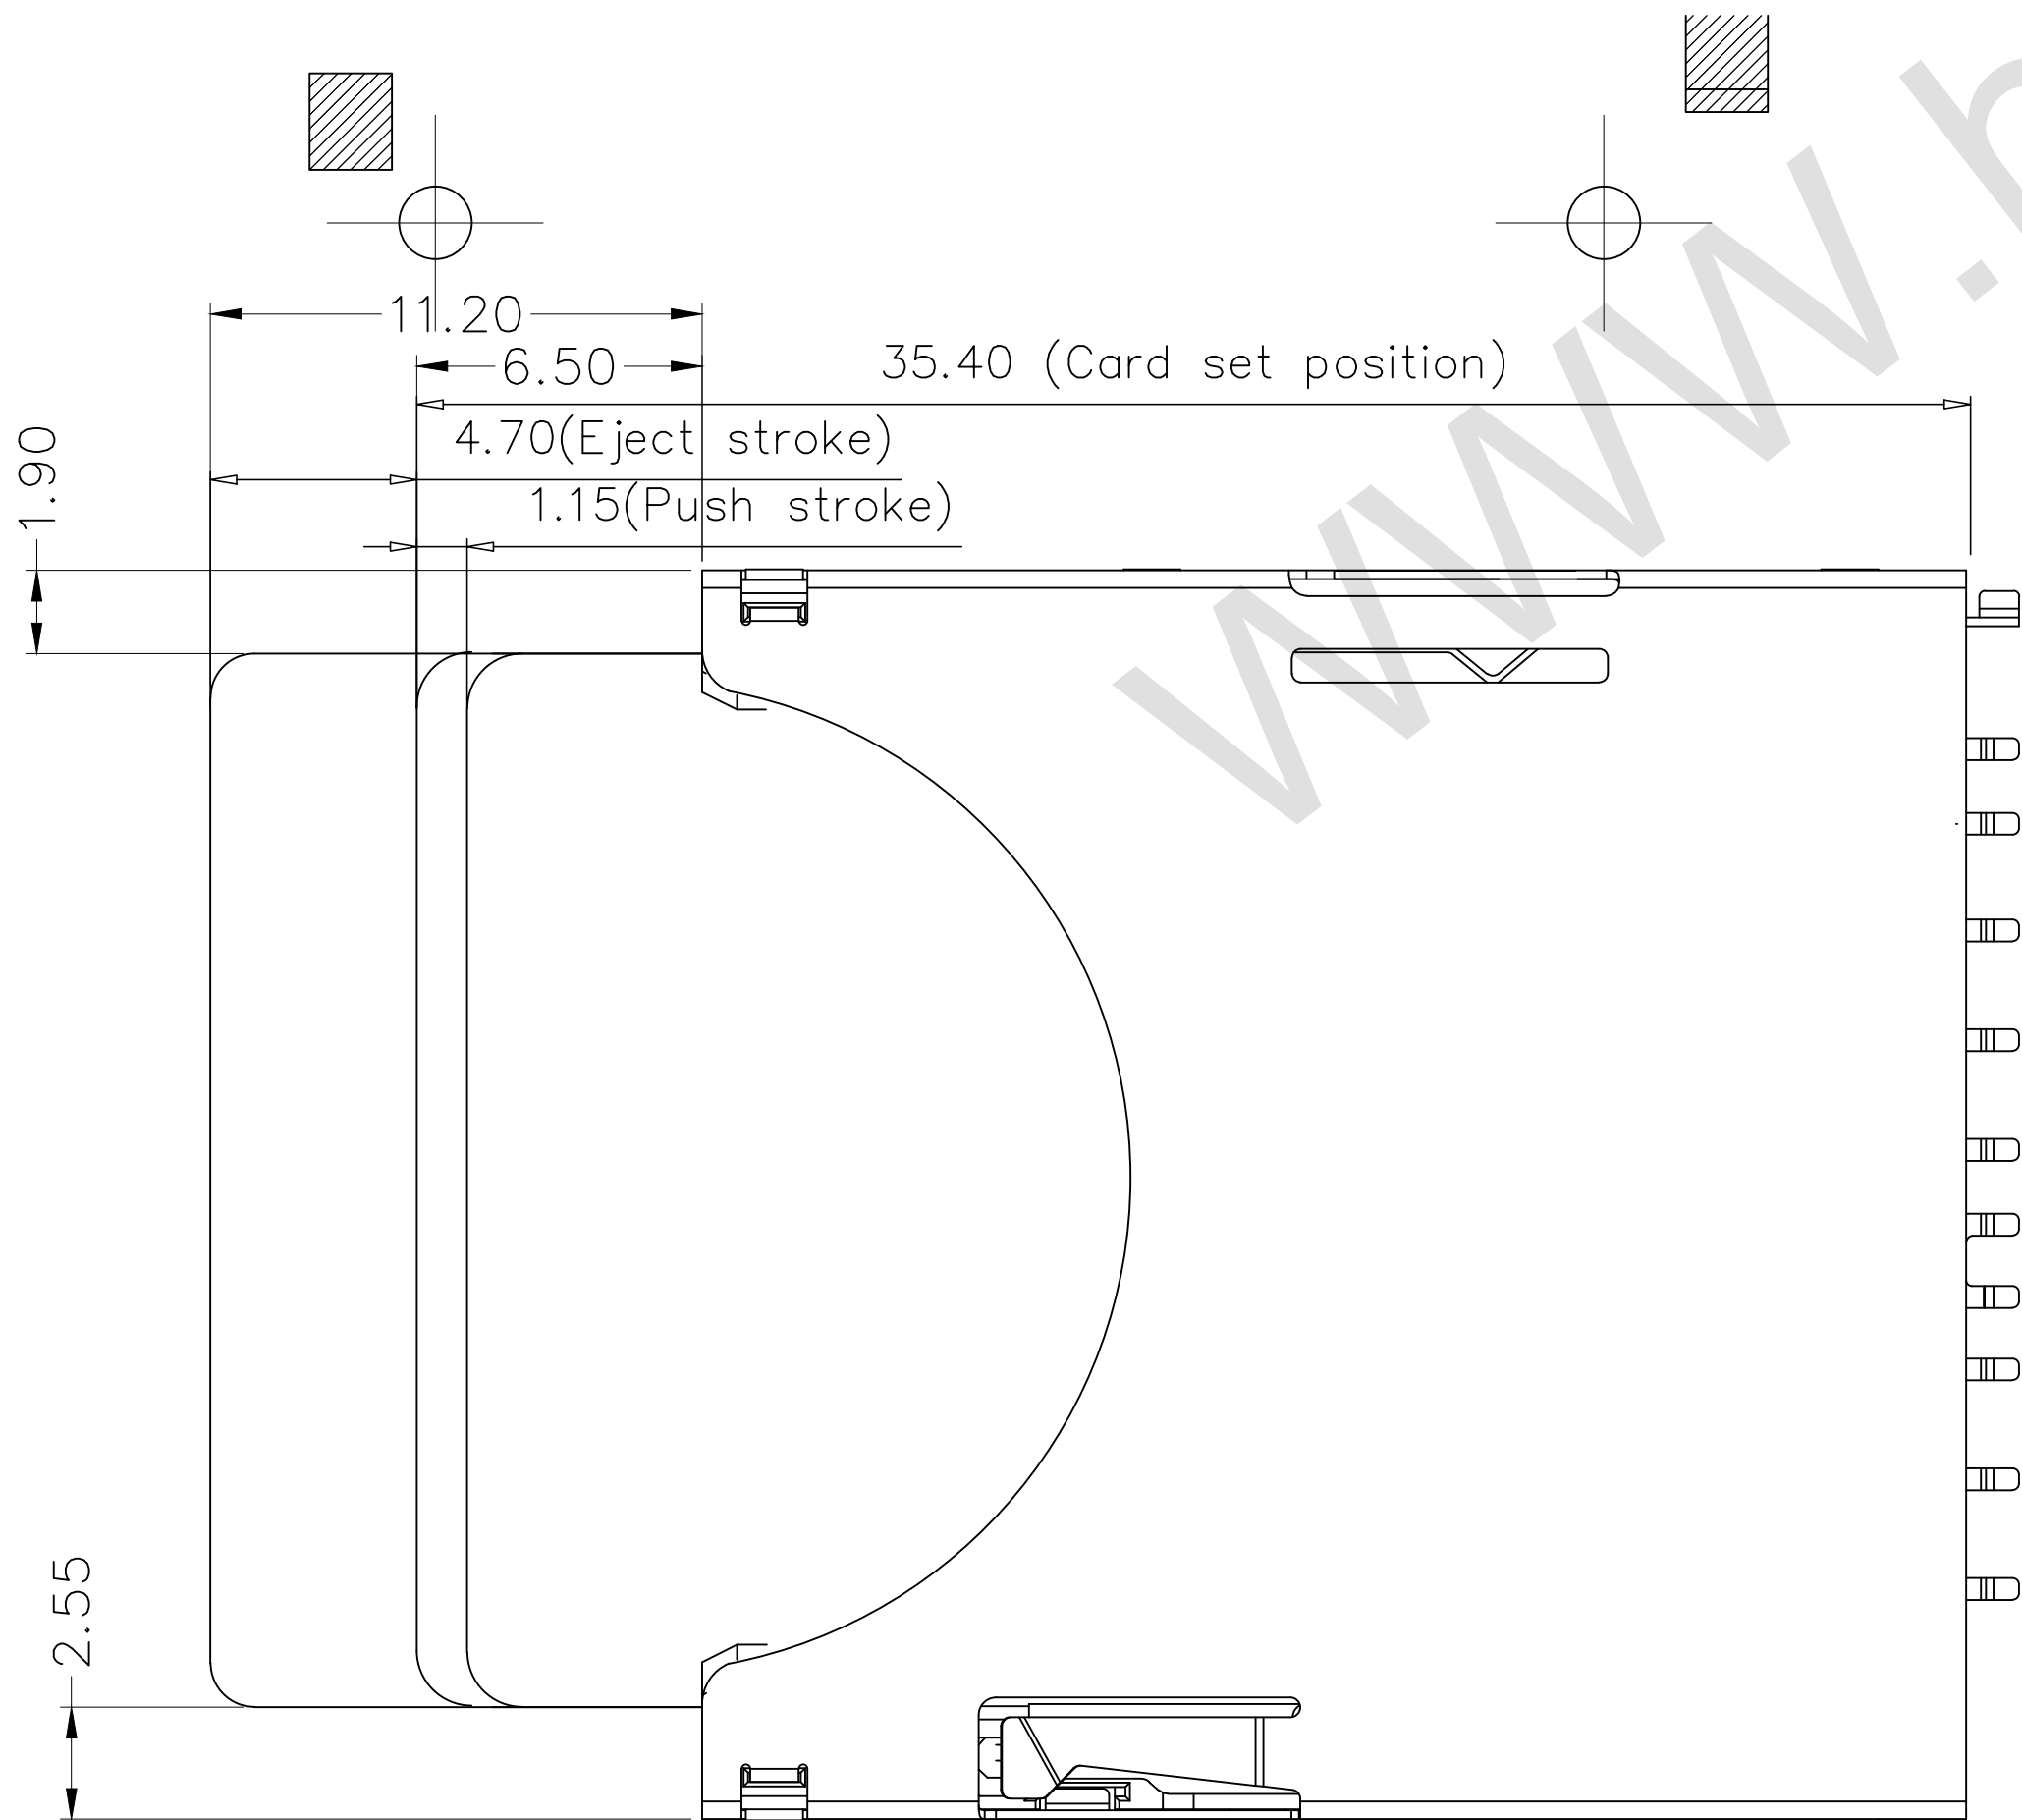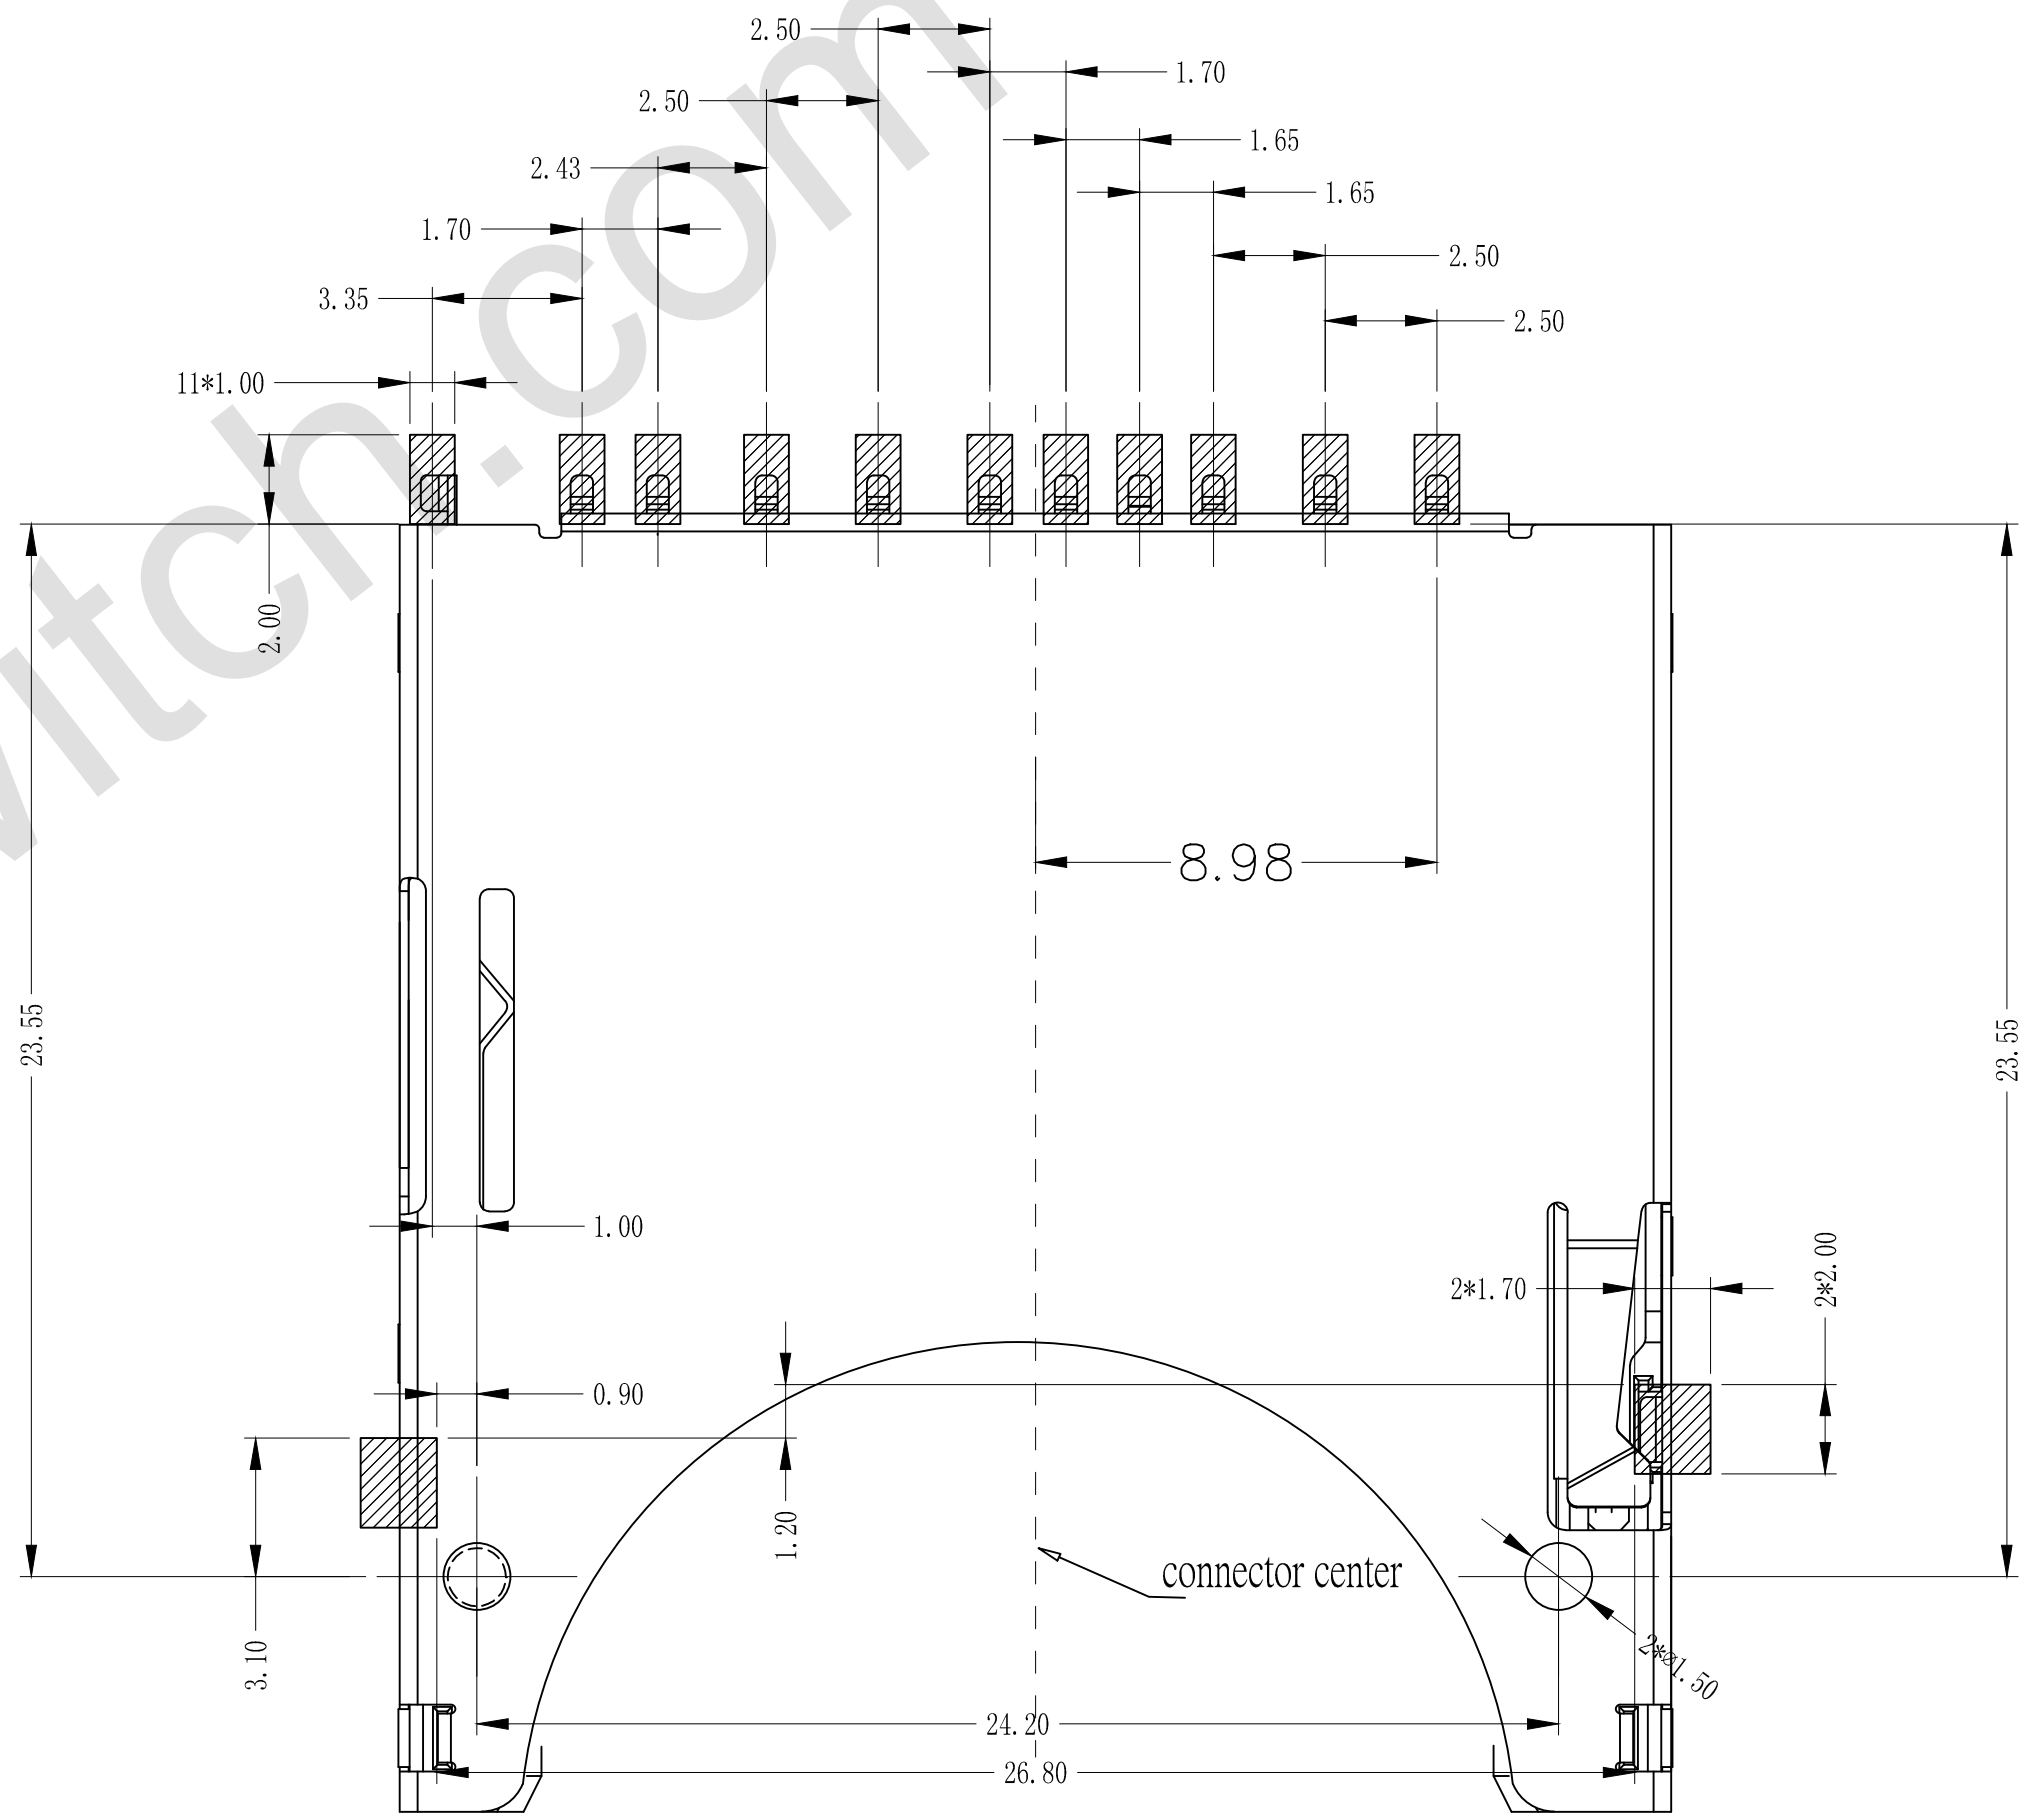

View of inserted card



DESIGN	MISS ZENG	SC ALL			未注公差 T00LERANCE		品名: SD push-push板上内脚
DRAWIGN	MISS LI	ANIT	MM		X. X ±0.38	X. XXX ±0.10	
CHECK	Mr. ZENG	SIZE	A4: 210*297		X.XX ±0.25	ANGULAR:±1°	
APPROVAL		VERSION	01				

品名:	SD push-push板上内脚
型号:	HH-SD-001-001



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.