
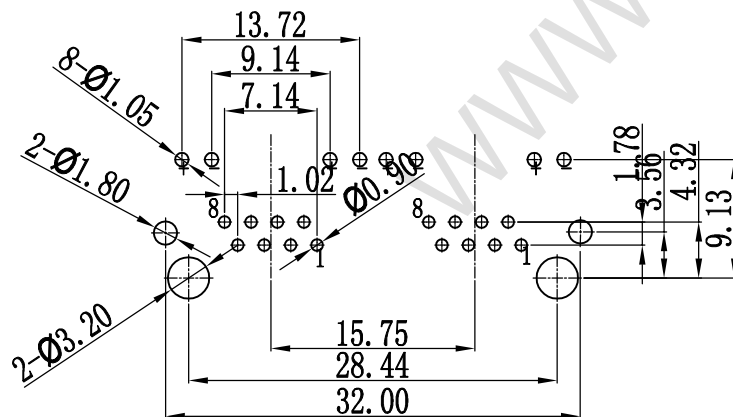
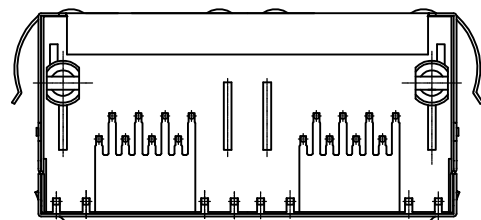


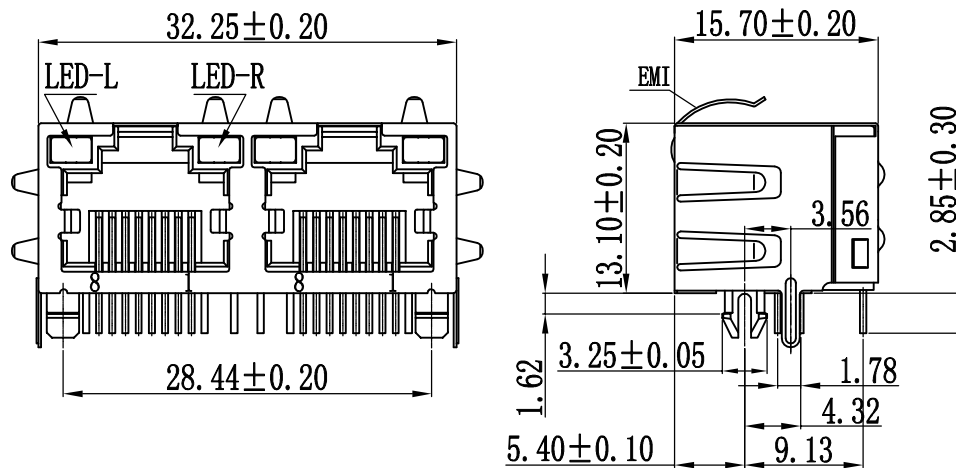

PCB LAYOUT/TOP VIEW

NOTES:

MATERIAL:

- | | |
|-------------------------------|--|
| 1.HOUSING | :GLASS FILLED POLYESTER UL94V-0 |
| 2.CONTACT (ROUND PIN Ø0.46mm) | :PHOSPHOR BRONZE WITH GOLD PLATING OVER NICKEL. |
| 3.SHIELD | :0.20mm THICKNESS COPPER ALLOY WITH NICKEL PLATED. |
| 4.LED | :OPTION |

ELECTRICAL:

- | | |
|-----------------------------------|-----------------------------------|
| 1.VOLTAGE RATING | :125V AC. |
| 2.CURRENT RATING | :1.5AMP. |
| 3.CONTACT RESISTANCE | :30 MILLIOHMS MAX. |
| 4.INSULATION RESISTANCE | :500 MEGOHMS MIN @ 500V DC. |
| 5.DIELECTRIC WITHSTANDING VOLTAGE | :1000V AC RMS 50Hz OR 60Hz. 1MIN. |

MECHANICAL:


- | | |
|----------------------|------------------------------|
| 1.INSETION FORCE | :2.2Kg MAX. |
| 2.RETENTION STRENGTH | :7.7Kg BETWEEN JACK AND PLUG |
| 3.DURABILITY | :750 CYCLES MINI. |

ENVIRONMENTAL:

- | | |
|-------------|----------------|
| 1.STORAGE | : -40℃~+85℃. |
| 2.OPERATION | : -40℃ TO 85℃. |

THE MARTS MODULAR PLUG CONFORMAING TO FCC PART68

PART NUMBER:

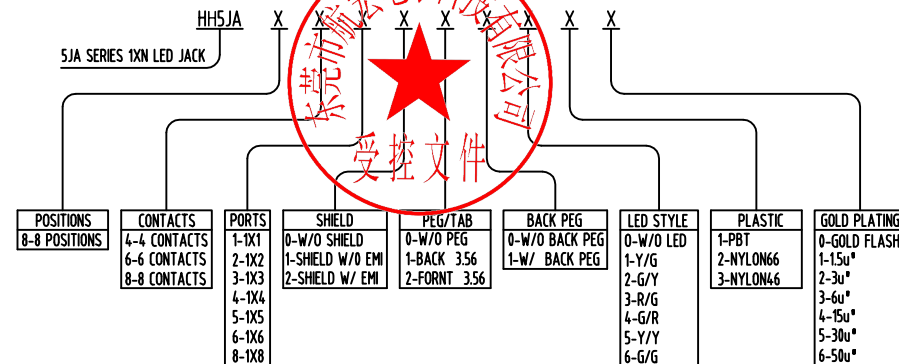

DESIGN	MISS ZENG	SC ALL			TOLERANCE	ANGLES	品名: 网口连接器
DRAWIGN	MISS LI	ANIT	mm		.0 ±0.20	ANGLES ±5°	
CHECK	Mr. ZENG	SIZE	A4 : 210*297		.00 ±0.15		
APPROVAL		VERSION	01		.000 ±0.1		

品名: 网口连接器	型号: HH5JA88-2210110
型号: HH5JA88-2210110	



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.