


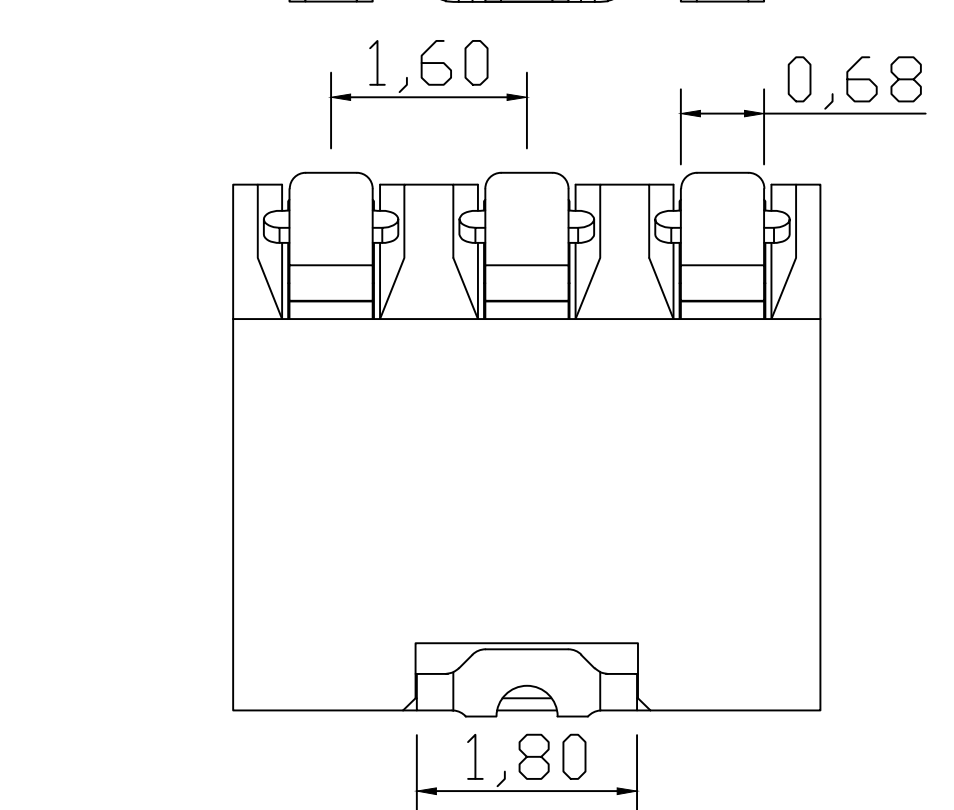
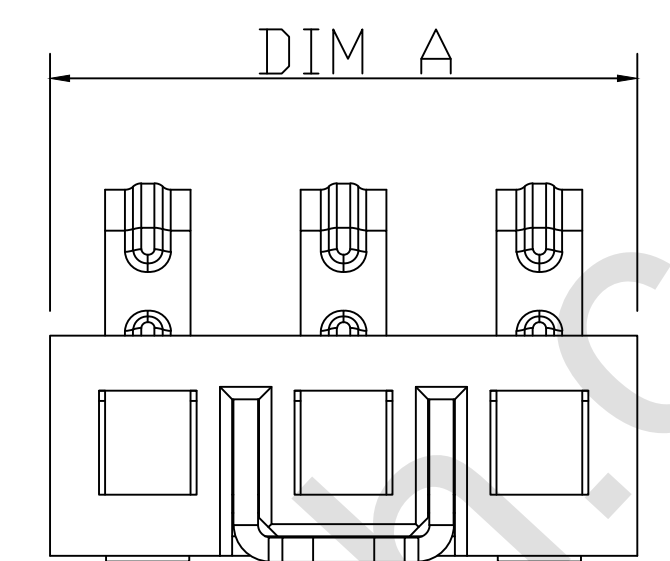
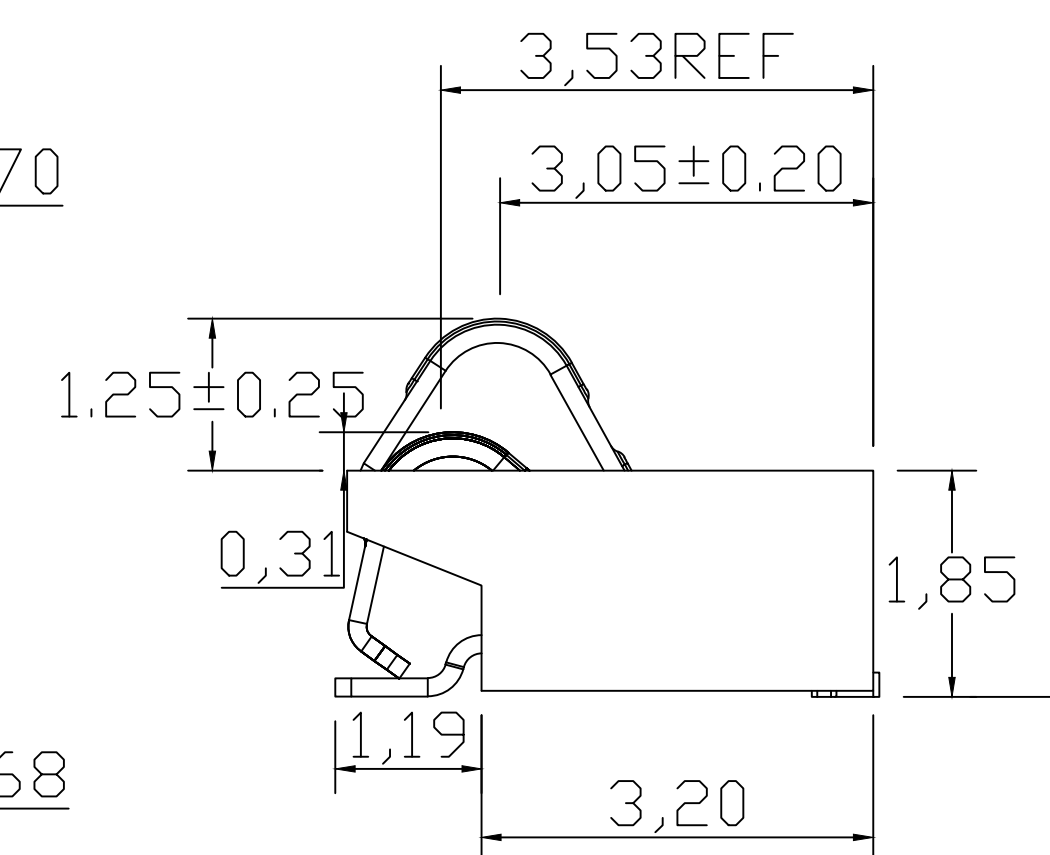
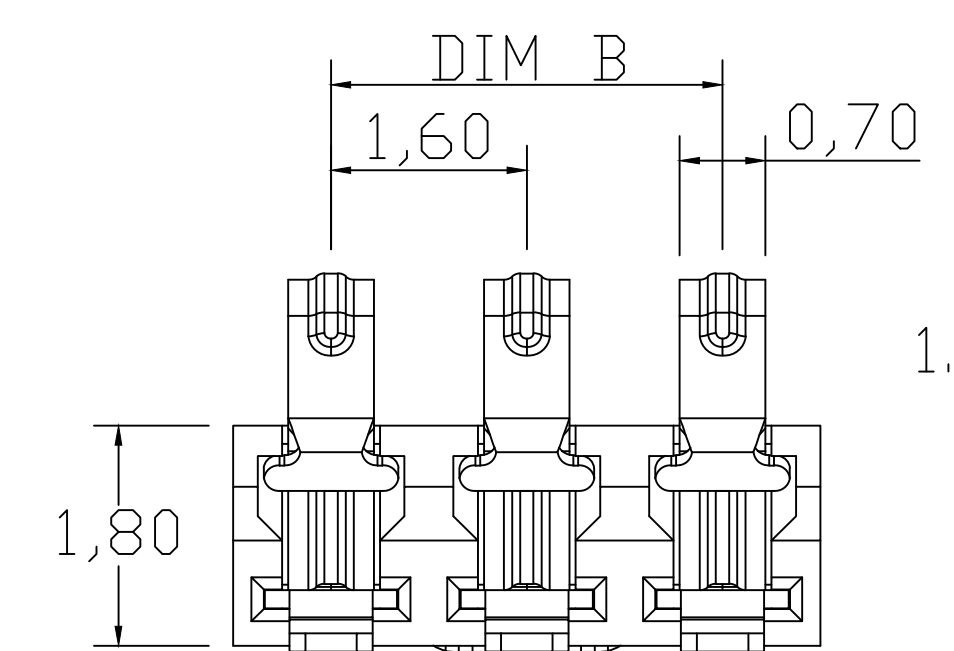


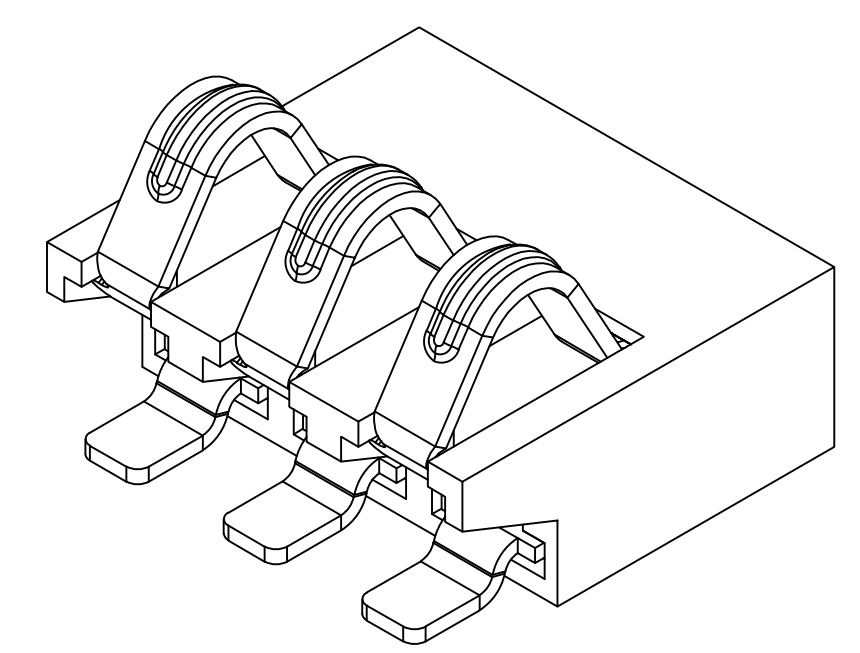

|                   |       |       |       |
|-------------------|-------|-------|-------|
| BHC016-10P180R125 | 16.00 | 14.40 | 11.20 |
| BHC016-9P180R125  | 14.40 | 12.80 | 9.60  |
| BHC016-8P180R125  | 12.80 | 11.20 | 8.00  |
| BHC016-7P180R125  | 11.20 | 9.60  | 6.40  |
| BHC016-6P180R125  | 9.60  | 8.00  | 4.80  |
| BHC016-5P180R125  | 8.00  | 6.40  | 3.20  |
| BHC016-4P180R125  | 6.40  | 4.80  | 0     |
| BHC016-3P180R125  | 4.80  | 3.20  | 0     |
| BE FILLED         | DIMA  | DIMB  | DIMC  |

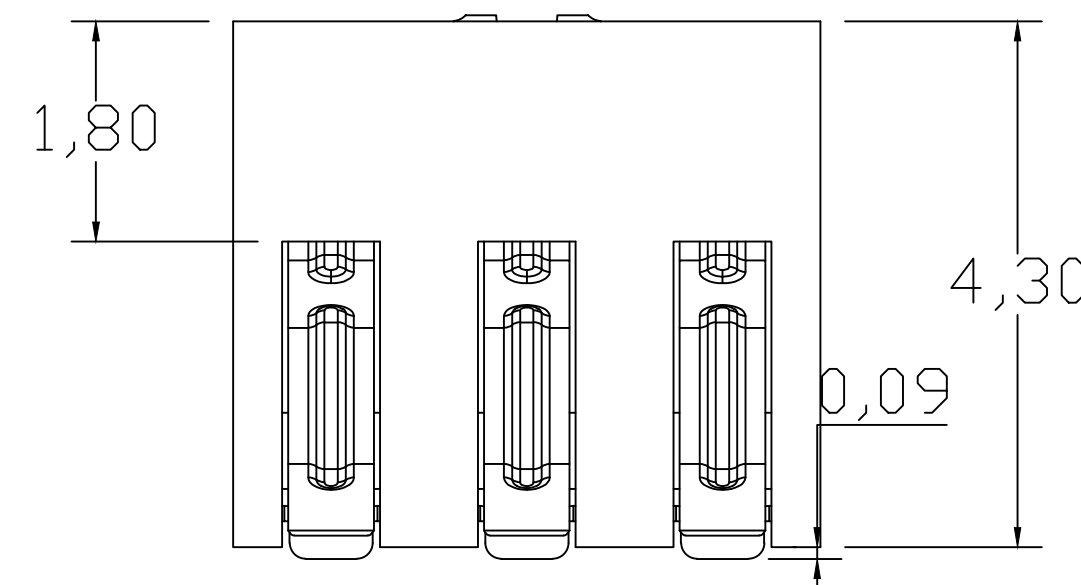

性能：  
额定电流：2.0A  
额定电压：12V  
耐电压：500V  
接触电阻：30mΩ MAX  
绝缘电阻：500MΩ  
工作温度：-40℃~+85℃  
塑件（材质）：LCP  
接触点（材质）：磷铜，触点镀金3U”，  
使用寿命：3000次以上

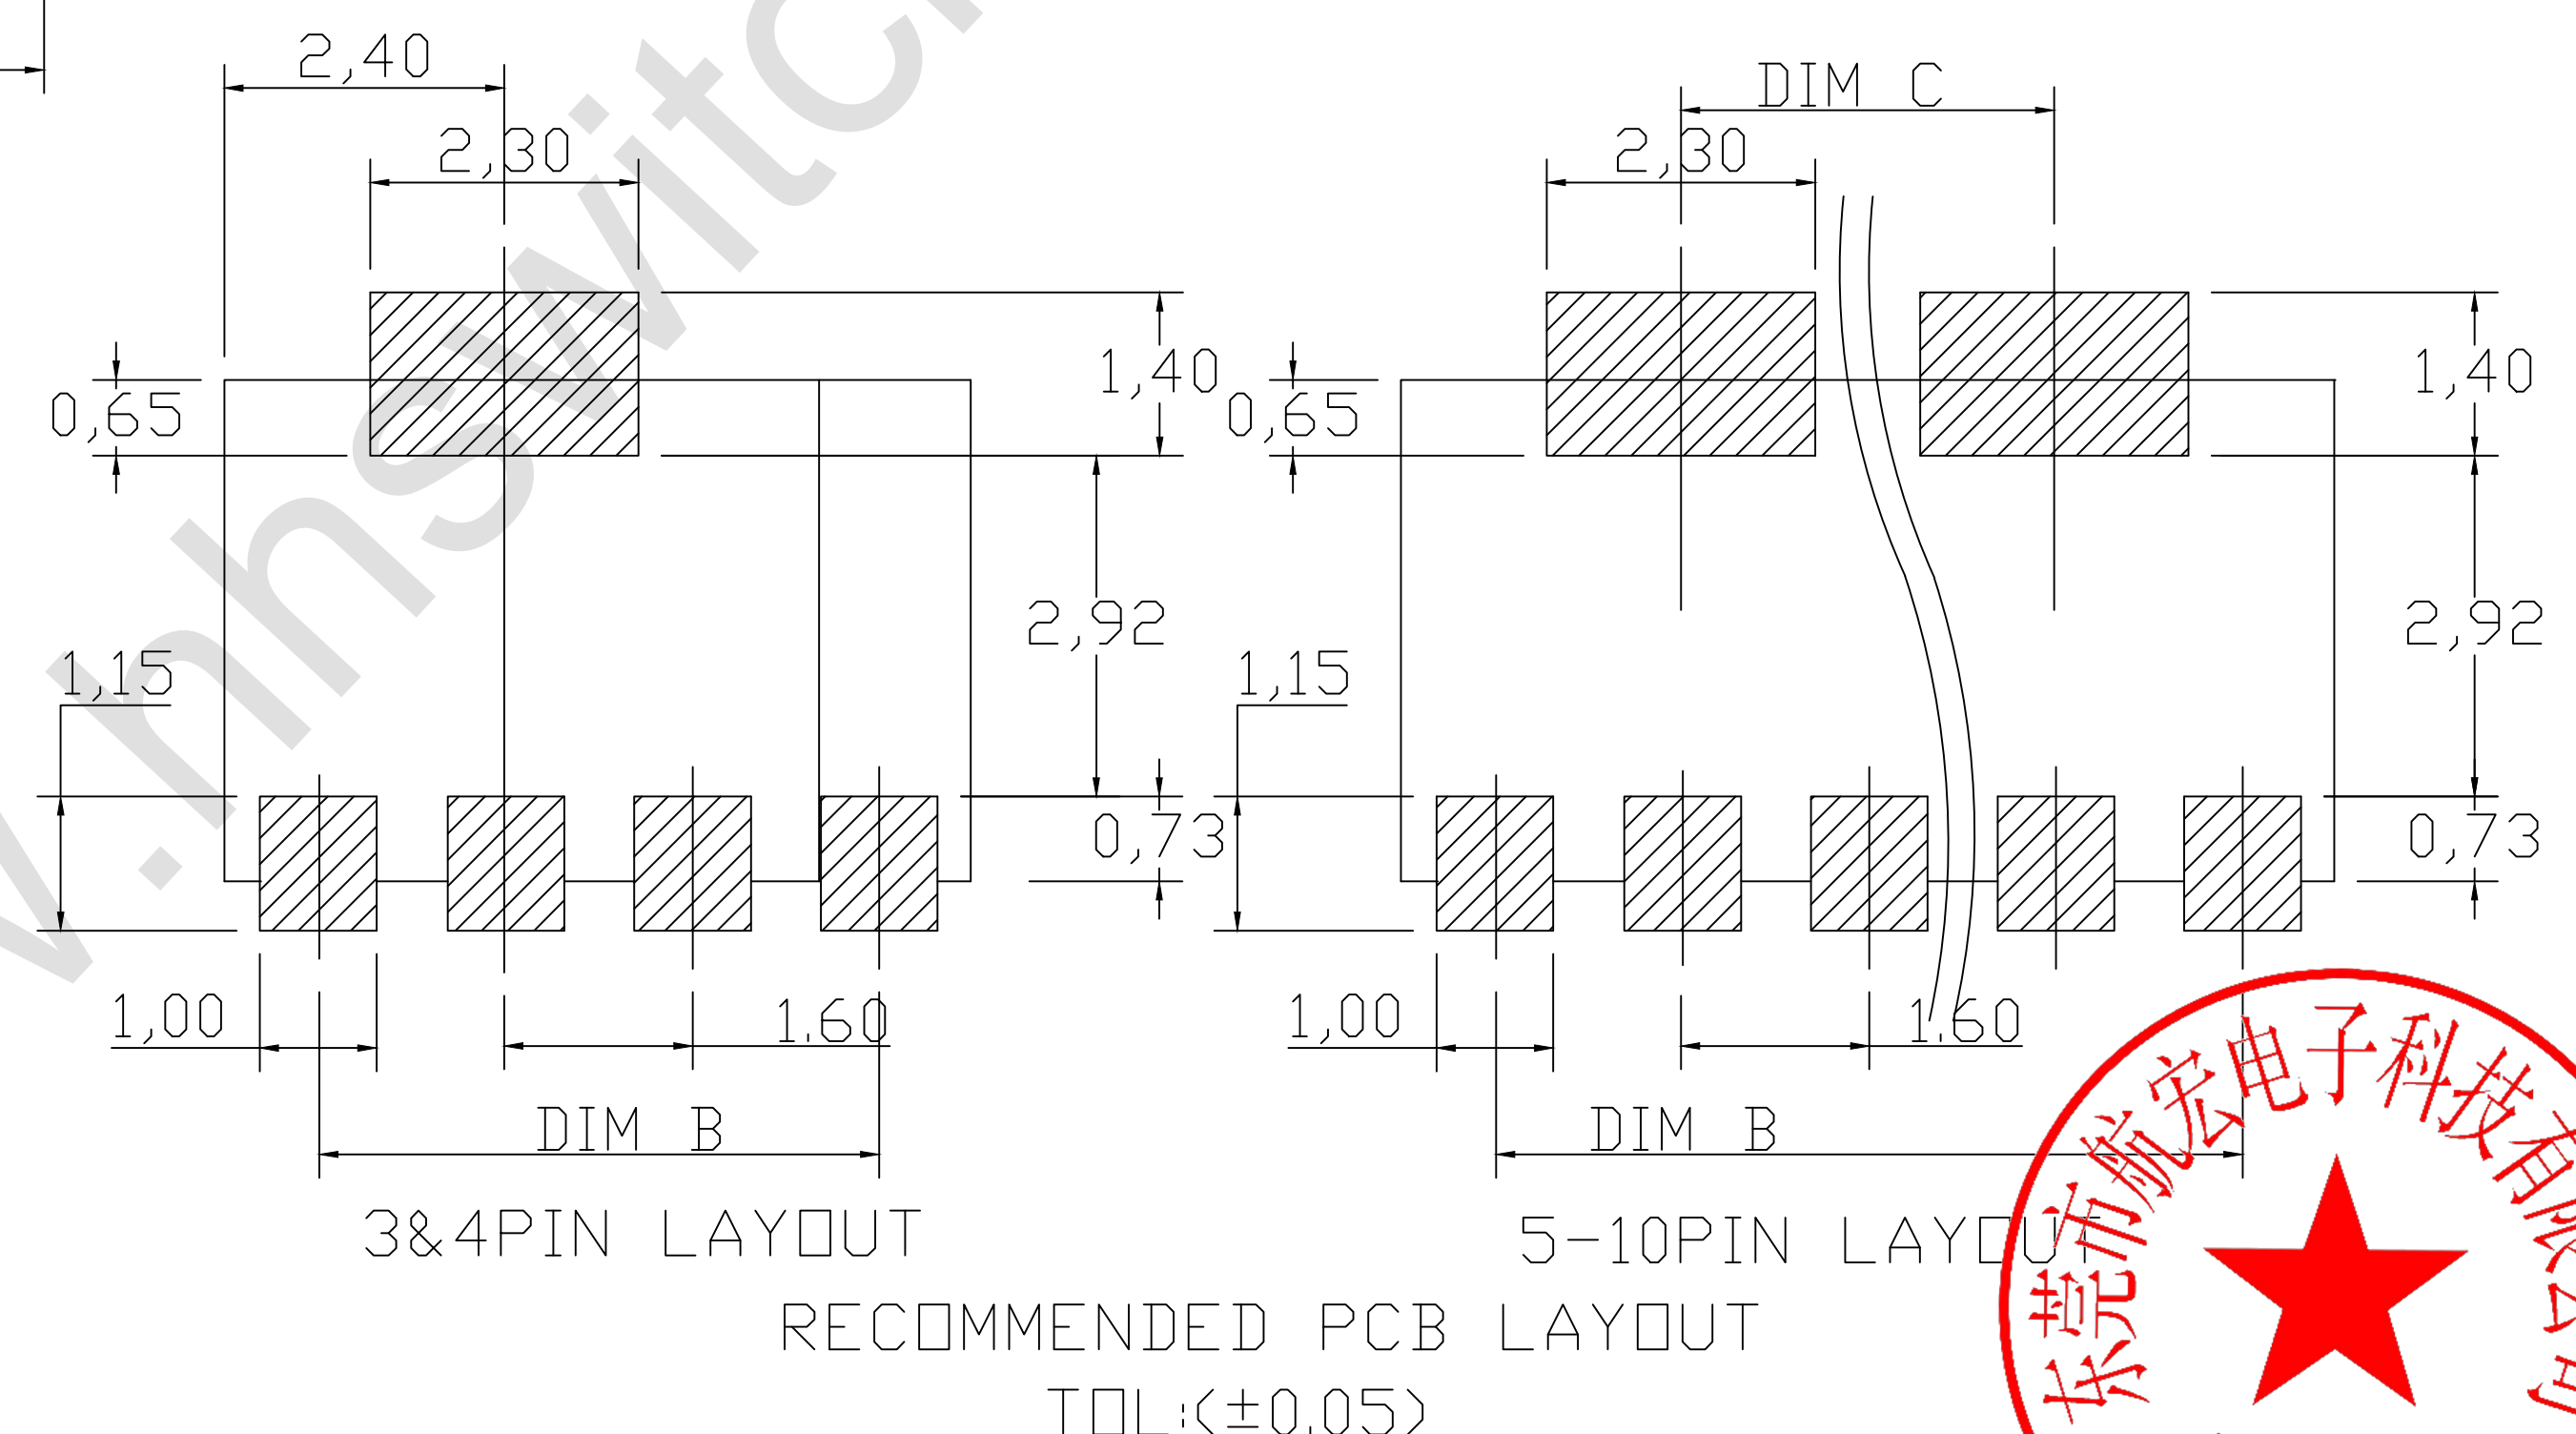

|          |           |         |             |  |                 |              |               |
|----------|-----------|---------|-------------|--|-----------------|--------------|---------------|
| DESIGN   | MISS ZENG | SC ALL  |             |  | 未注公差 T00LERANCE |              | 品名： 电 池 连 接 器 |
| DRAWIGN  | MISS LI   | ANIT    | MM          |  | X. ±0.35        | X.XX ±0.15   |               |
| CHECK    | Mr. ZENG  | SIZE    | A4: 210*297 |  | X. X ±0.25      | X. XXX ±0.05 |               |
| APPROVAL |           | VERSION | 01          |  |                 |              |               |

型号： BHC016-10P180R125



**东莞市航宏电子科技有限公司**  
Dongguan Hanghong Electronics Co., Ltd.