
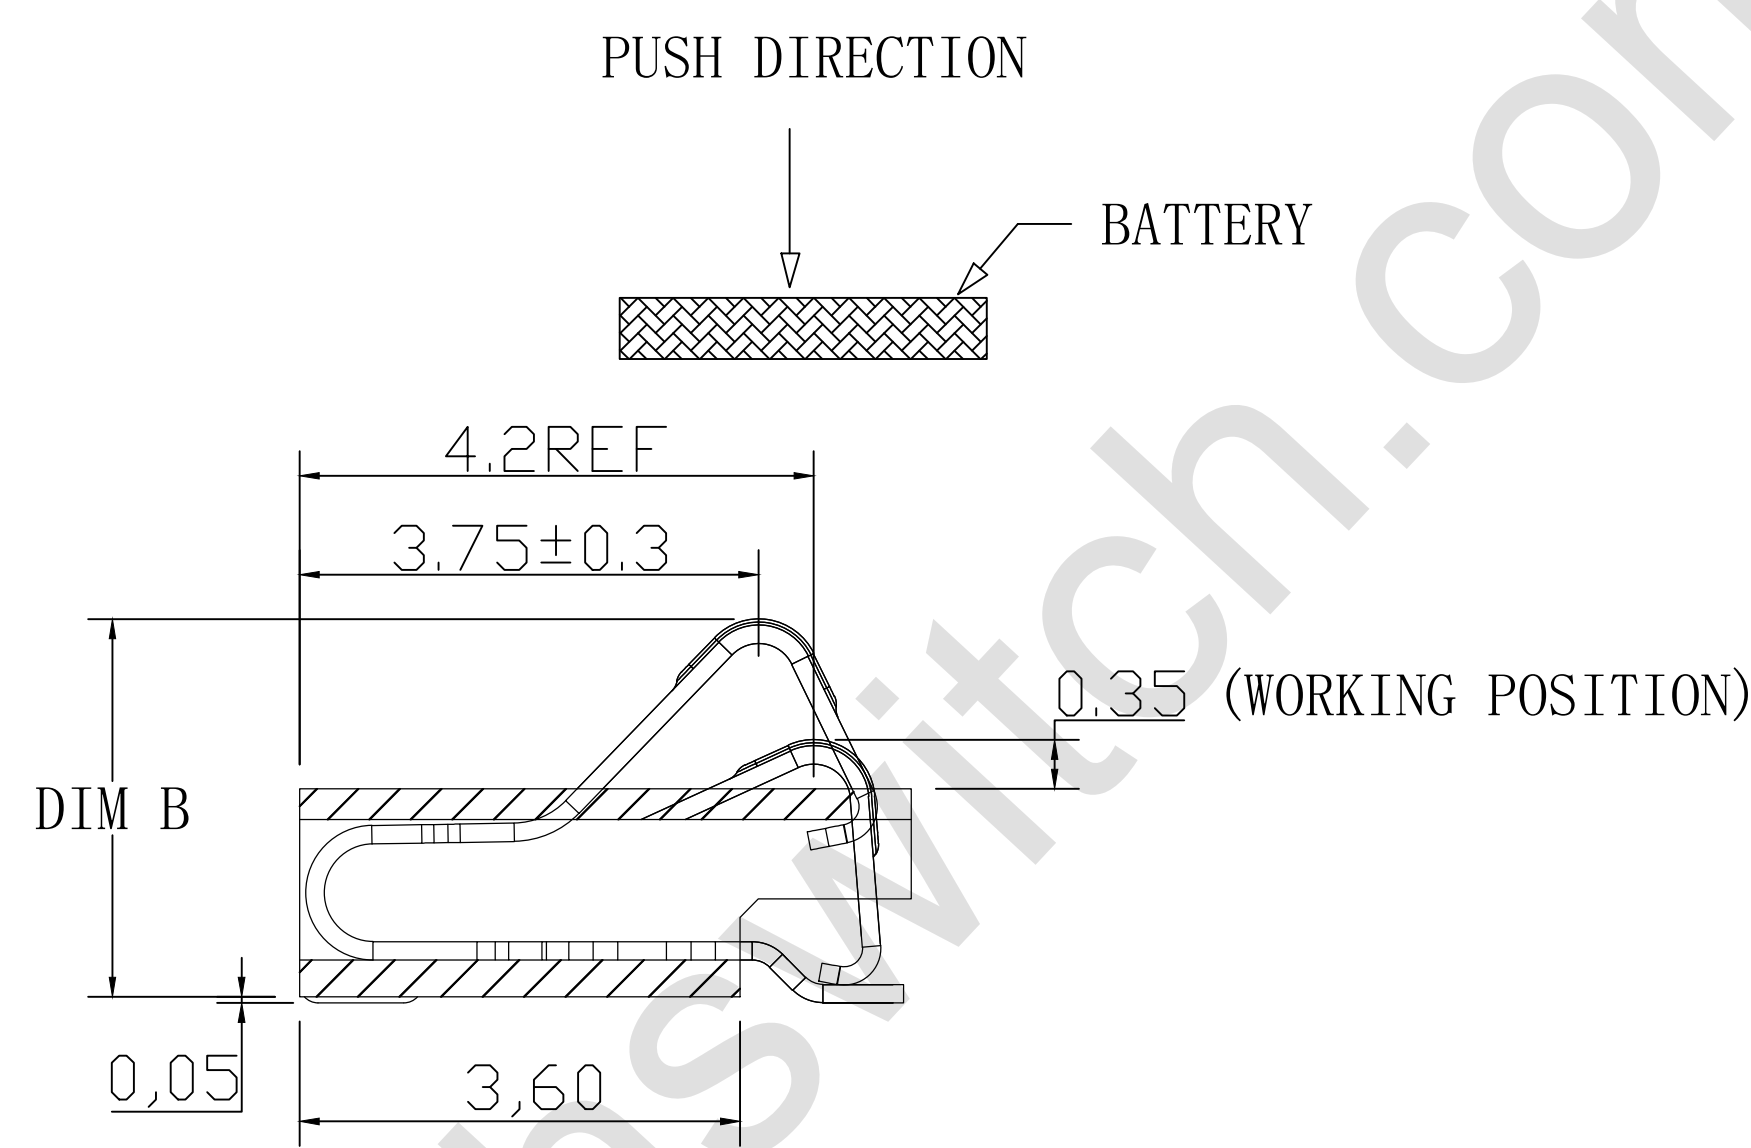
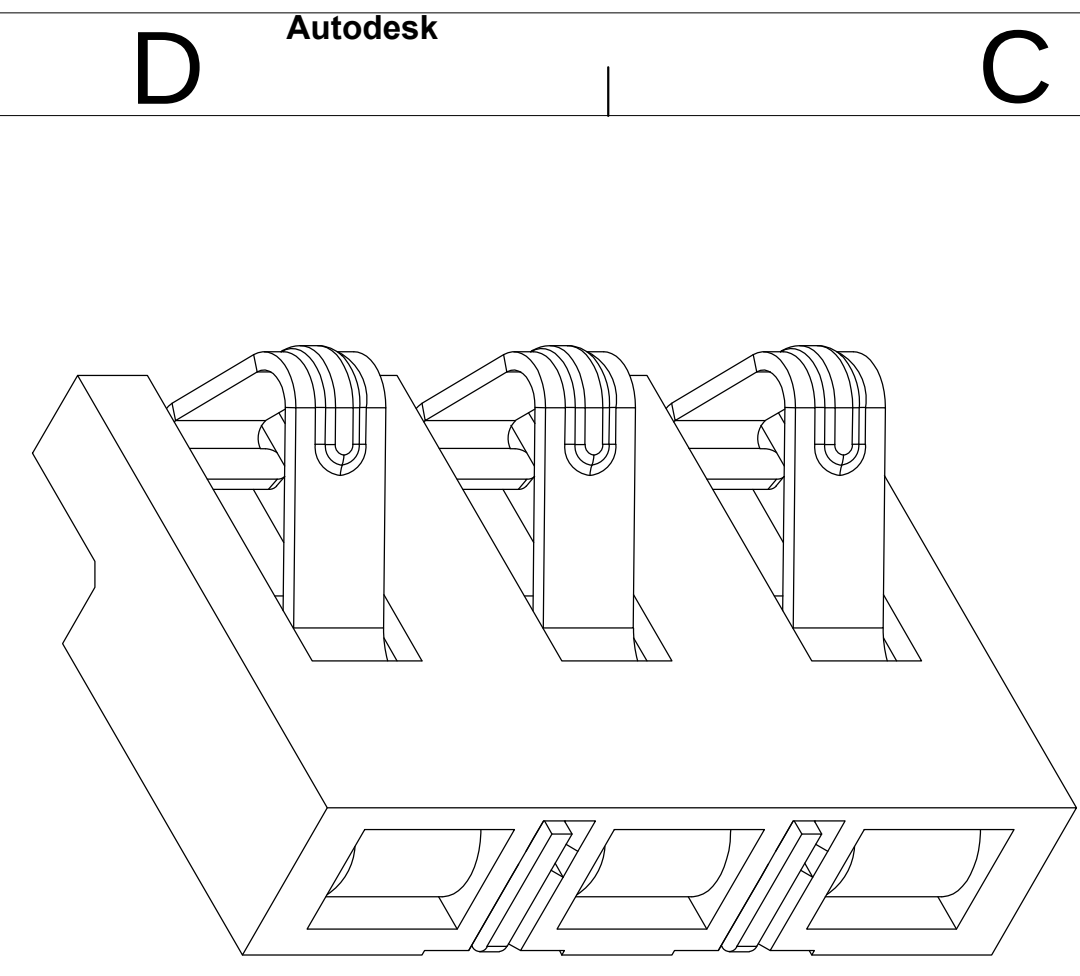


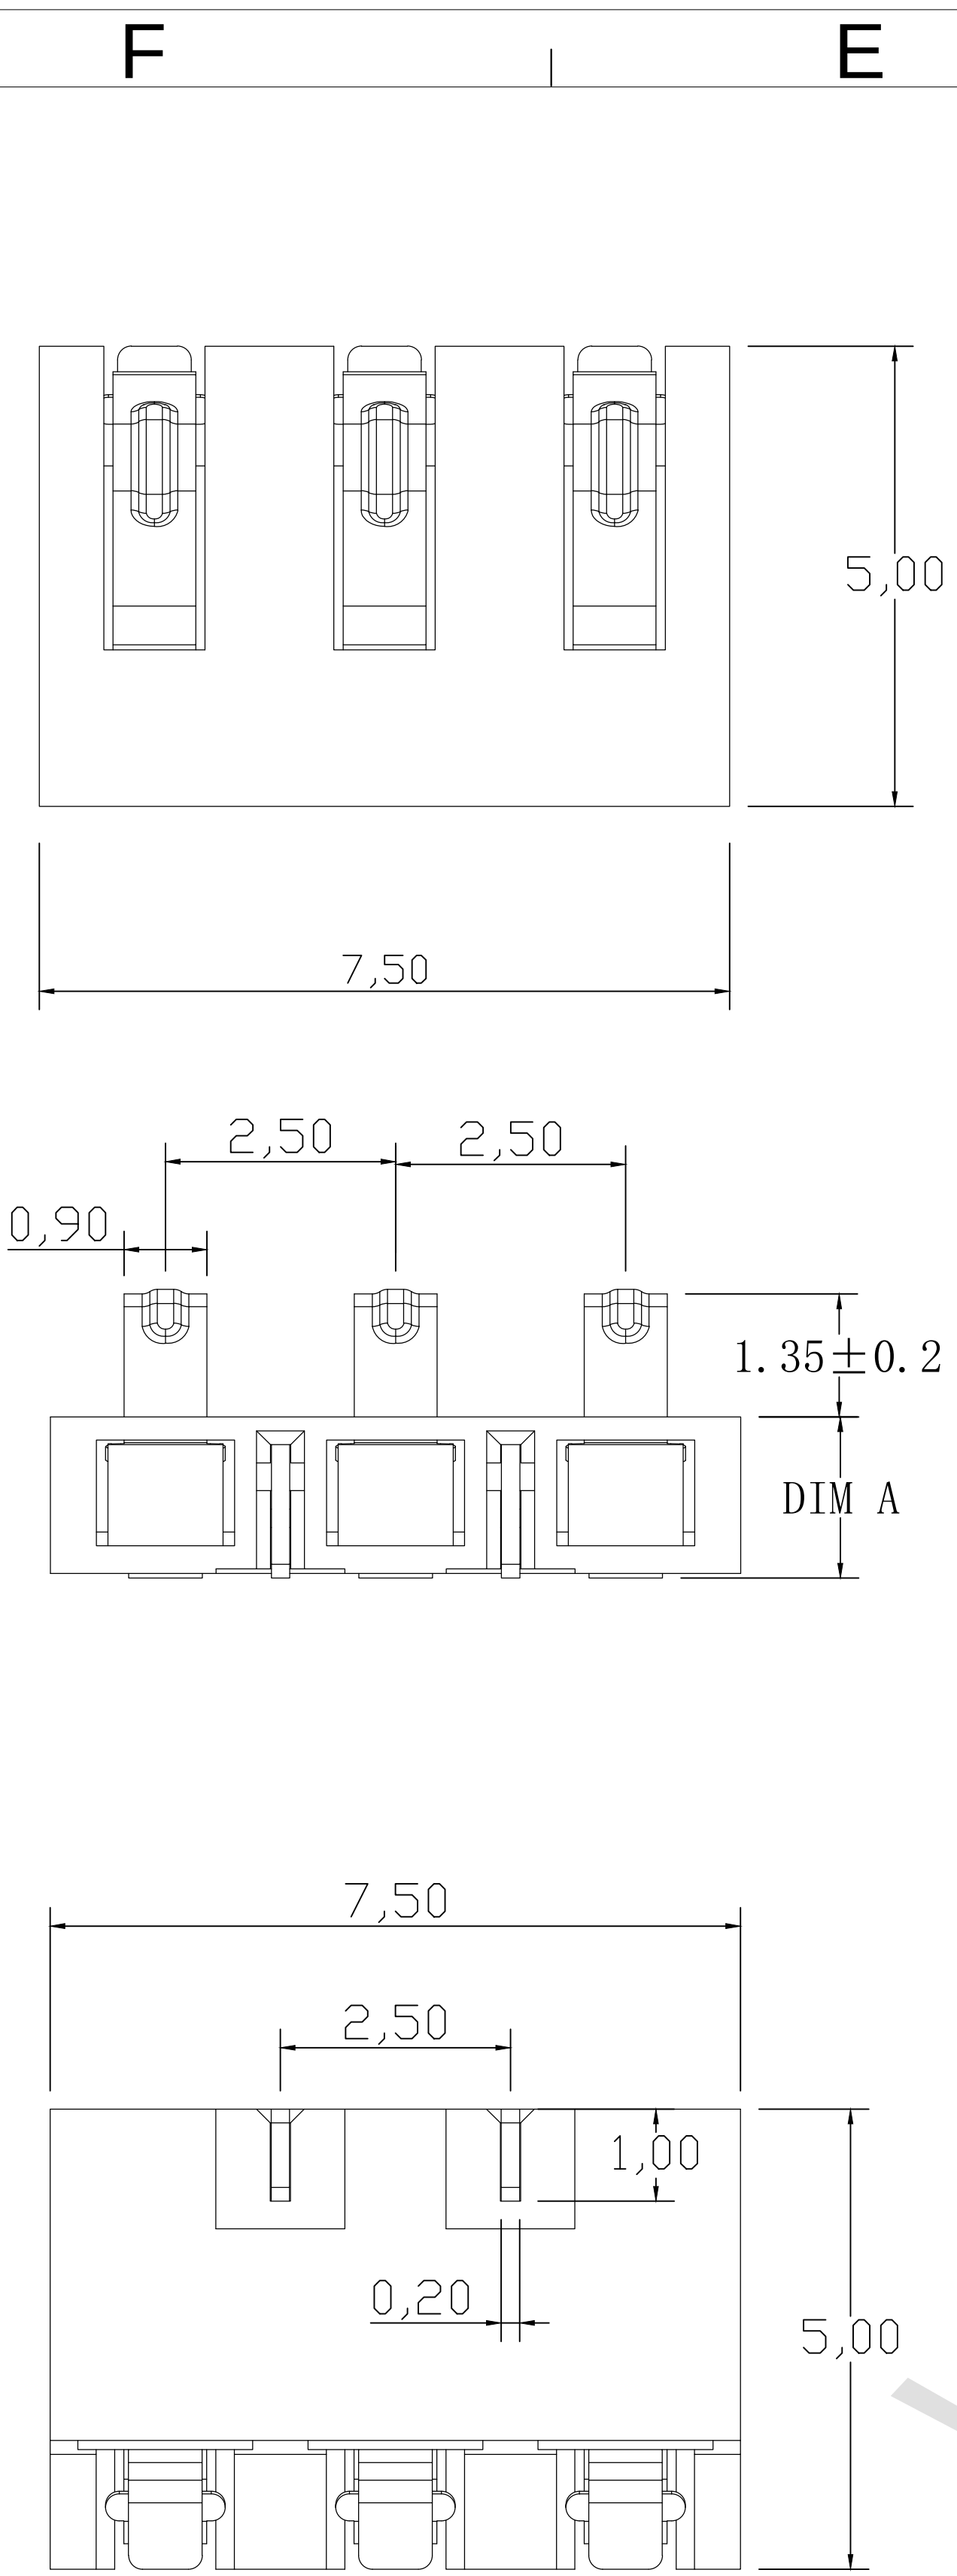

PART NO.	DIM A	DIM B
BHC025-3P170	1.7	3.05 ± 0.2
BHC025-3P200	2.0	3.35 ± 0.2

性能:

额定电流: 2.0A

额定电压: 12V

耐电压: 500V

接触电阻: 30mΩ

绝缘电阻: 500MΩ

工作温度: -40℃~+85℃


使用寿命: 5000次以上

塑件(材质): LCP(黑色) UL94-V0

接触点(材质): 锡磷青铜, 触点镀金3U", 焊脚镀金1U", 镍30-80U"

固定片(材质): 黄铜C2680, 镀全雾锡70U"以上, 镍底30-80U"

环保要求: 符合ROHS限值。

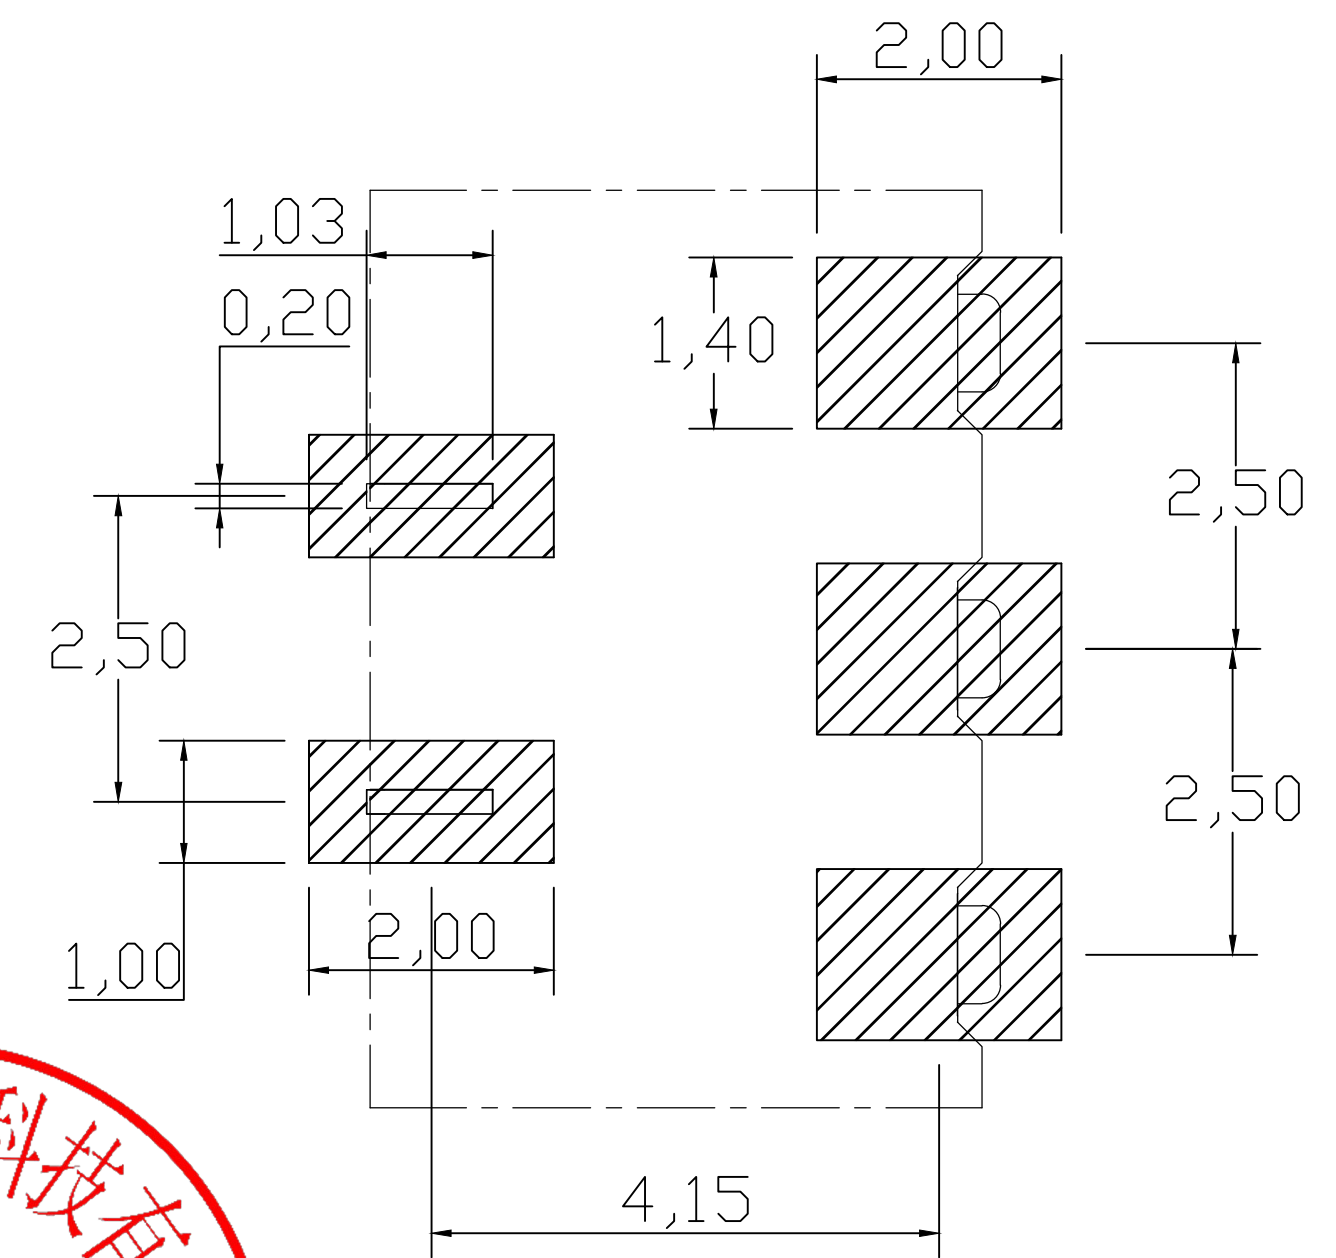

RECOMMENDED PCB LAYOUT

TOP VIEW(. XX ± 0.05)

DESIGN	MISS ZENG	SC ALL			未注公差 T00LERANCE		品名: 电 池 连 接 器
DRAWIGN	MISS LI	ANIT	MM		X. ±0.35	X.XX ±0.15	
CHECK	Mr. ZENG	SIZE	A4: 210*297		X. X ±0.25	X. XXX ±0.05	型号: BHC025-3P200
APPROVAL		VERSION	01				
F E D C B A							