
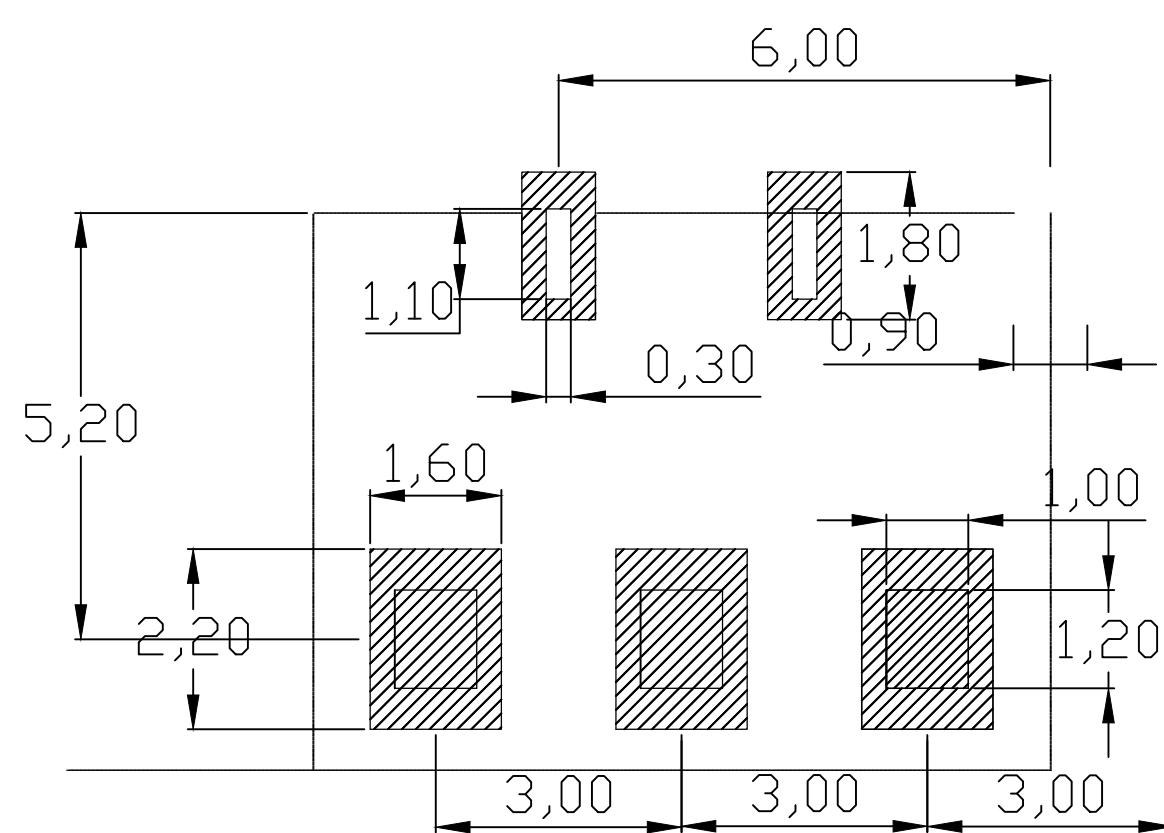
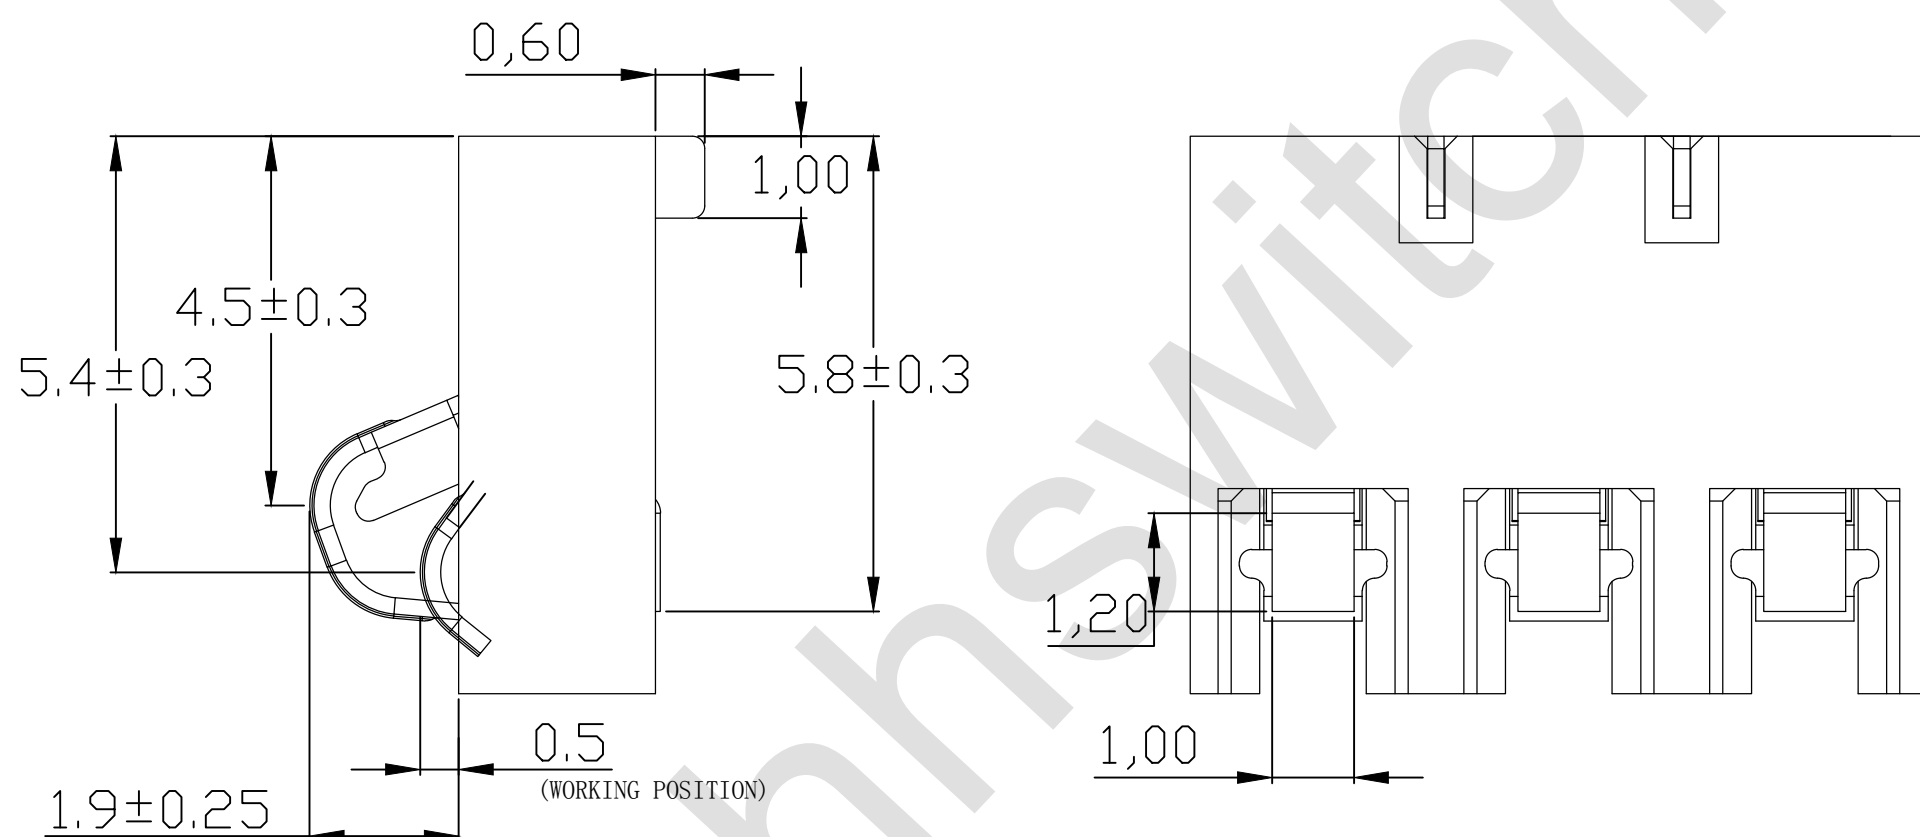
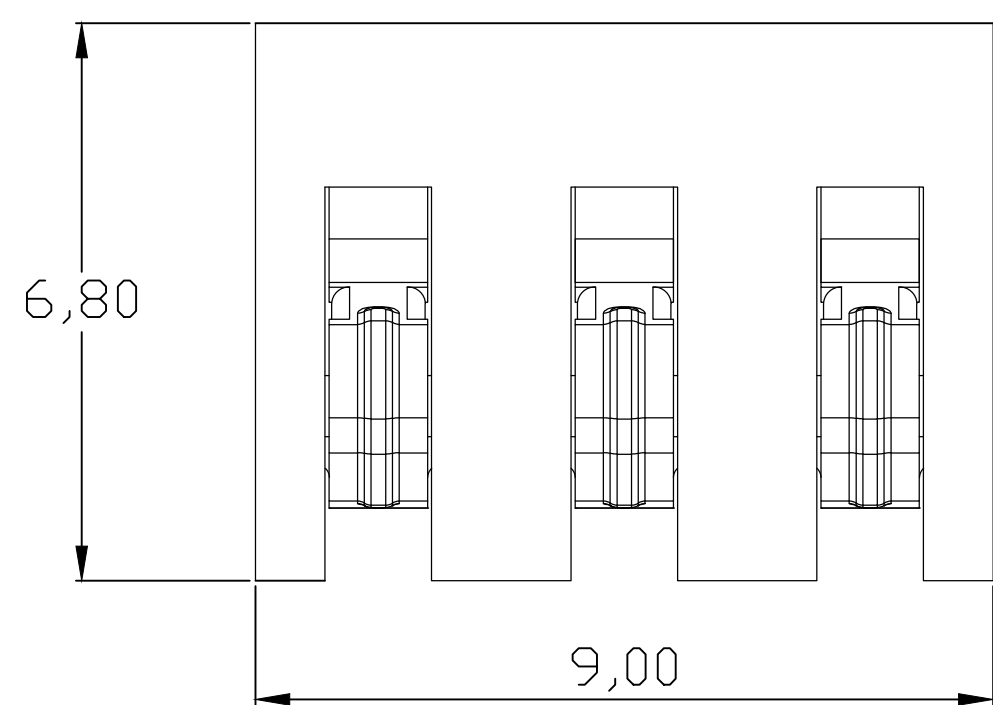
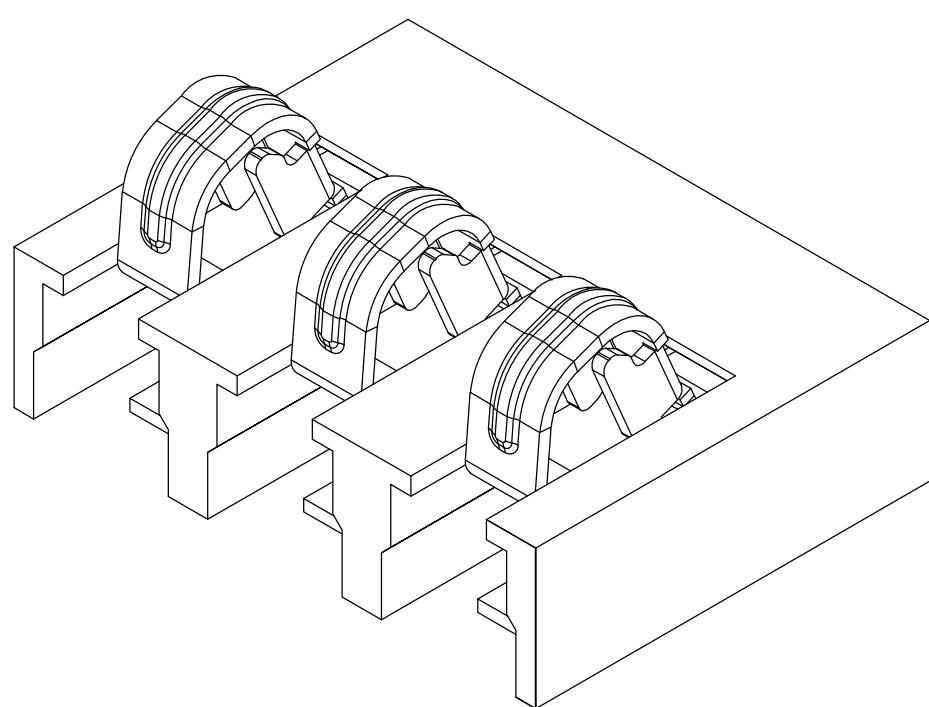



F E D C B A

性能:

额定电流: 3.0A
额定电压: 24V
耐电压: 500V
接触电阻: 30mΩ MAX
绝缘电阻: 500MΩ
工作温度: -40℃~+85℃
塑件(材质): LCP, 耐高温260℃
接触点(材质): 铜合金, 触点镀金3U

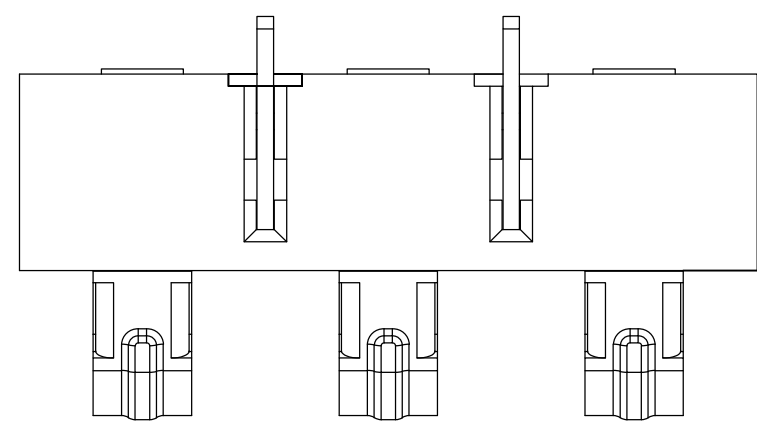

RECOMMENDED PCB LAYOUT
TOP VIEW(. XX±0.05)

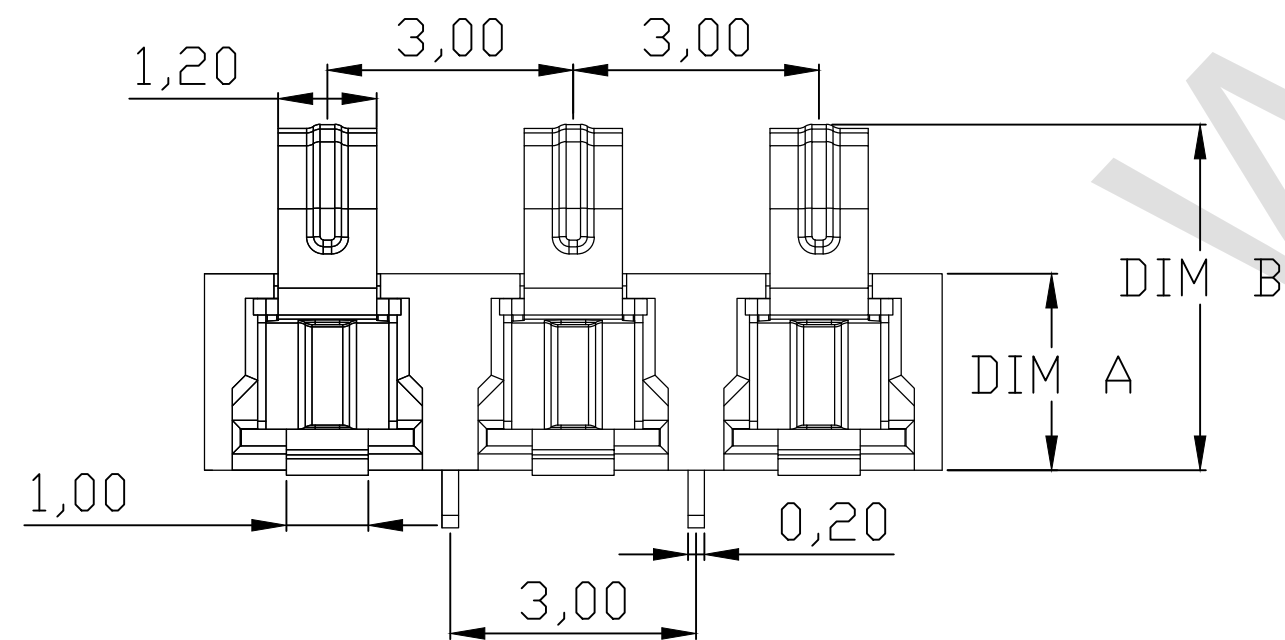

PART NO.	DIM A	DIM B
BHC060-3P240C06	2.4	4.30±0.25
BHC060-3P350C06	3.5	5.40±0.25



DESIGN	MISS ZENG	SC ALL			未注公差 T00LERANCE		品名: 电池连接器 型号: BHC060-3P350C06
DRAWIGN	MISS LI	ANIT	MM		X. ±0.35	X.XX ±0.15	
CHECK	Mr. ZENG	SIZE	A4: 210*297		X. X ±0.25	X. XXX ±0.05	
APPROVAL		VERSION	01				



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.

F E D C B A