

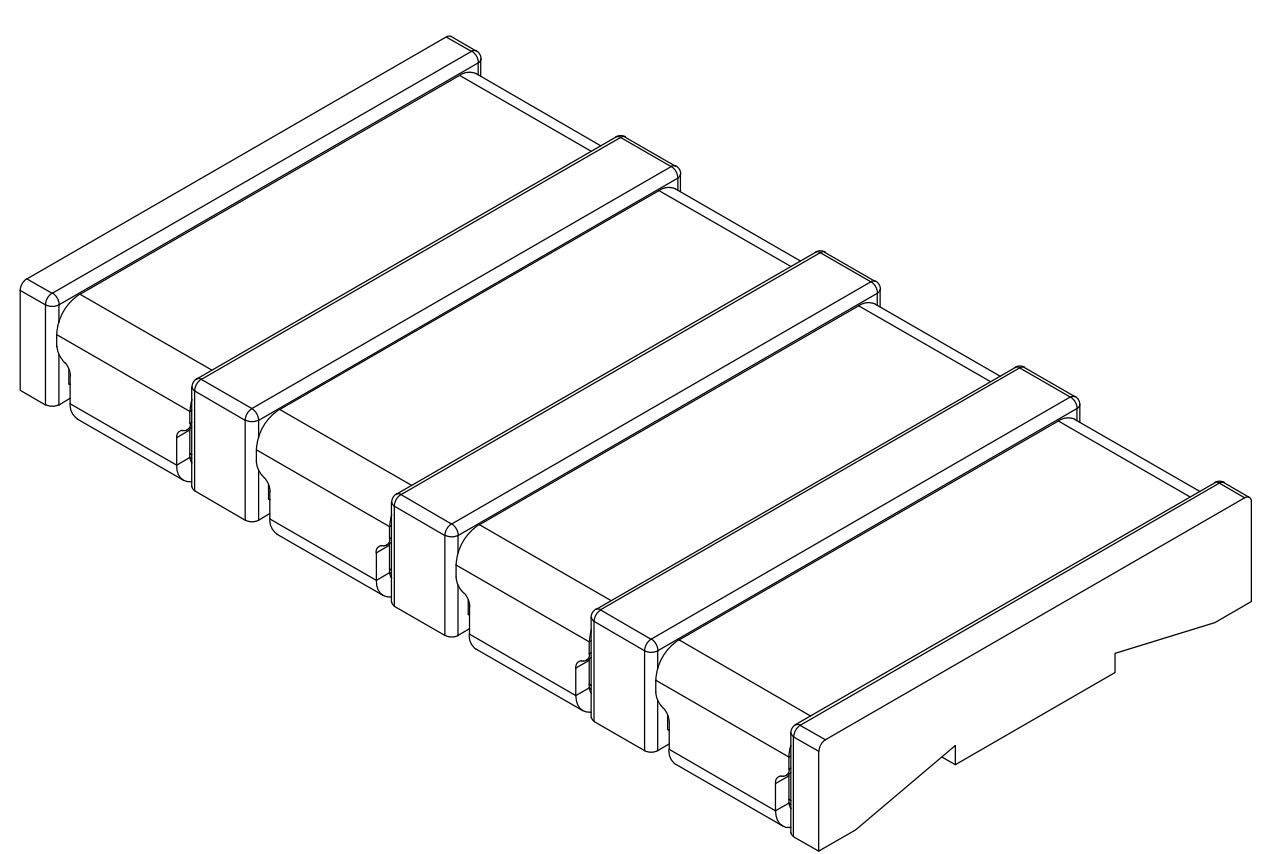
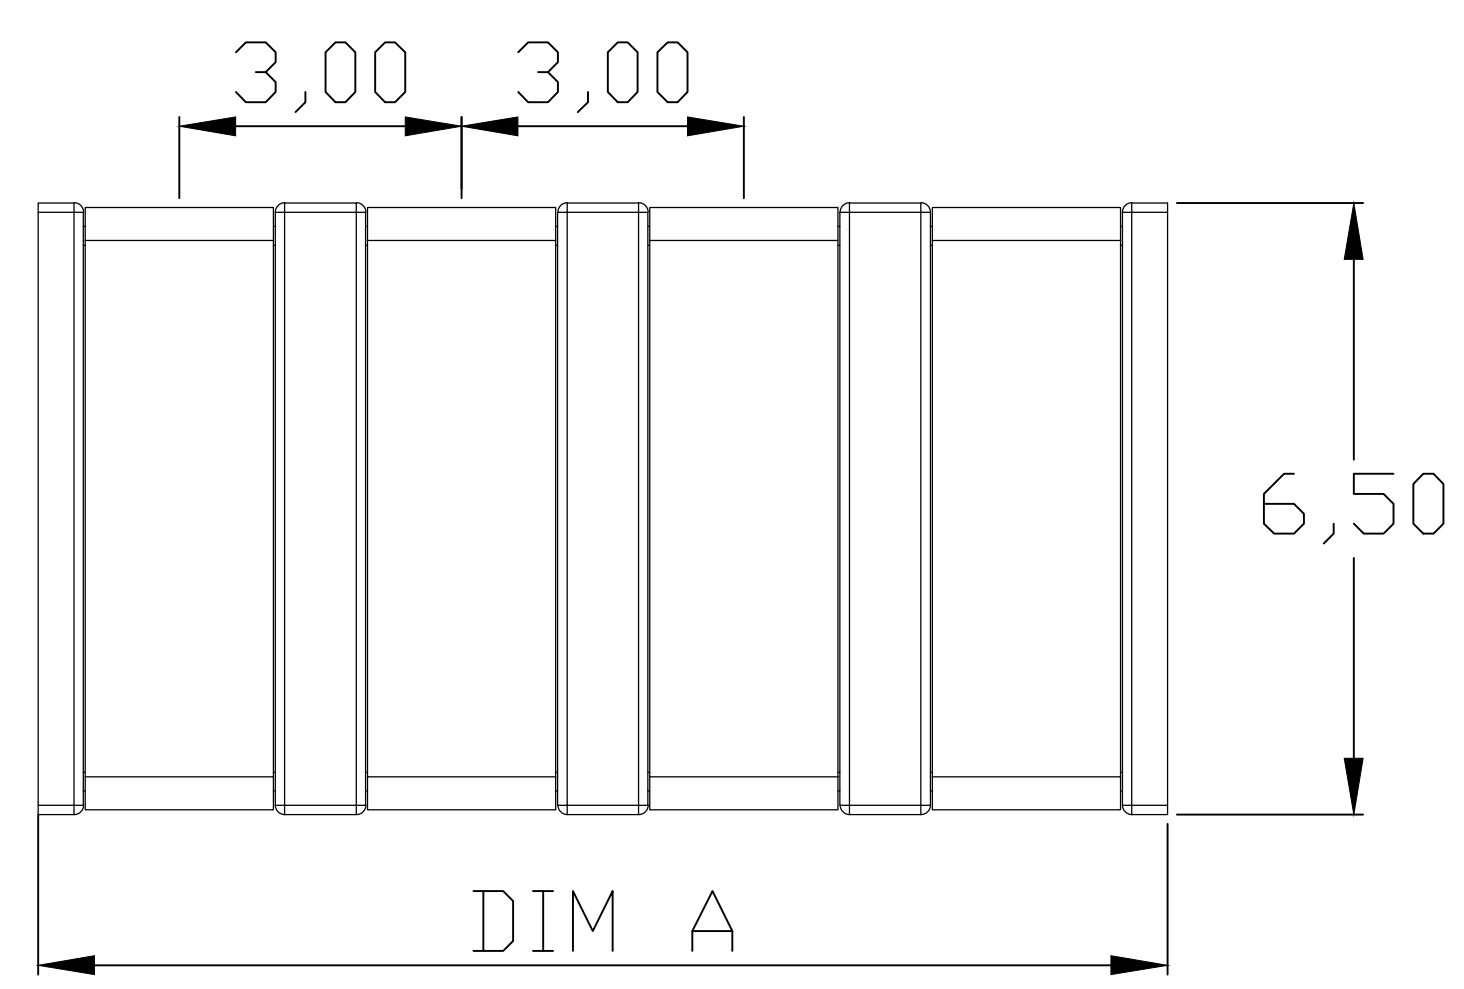
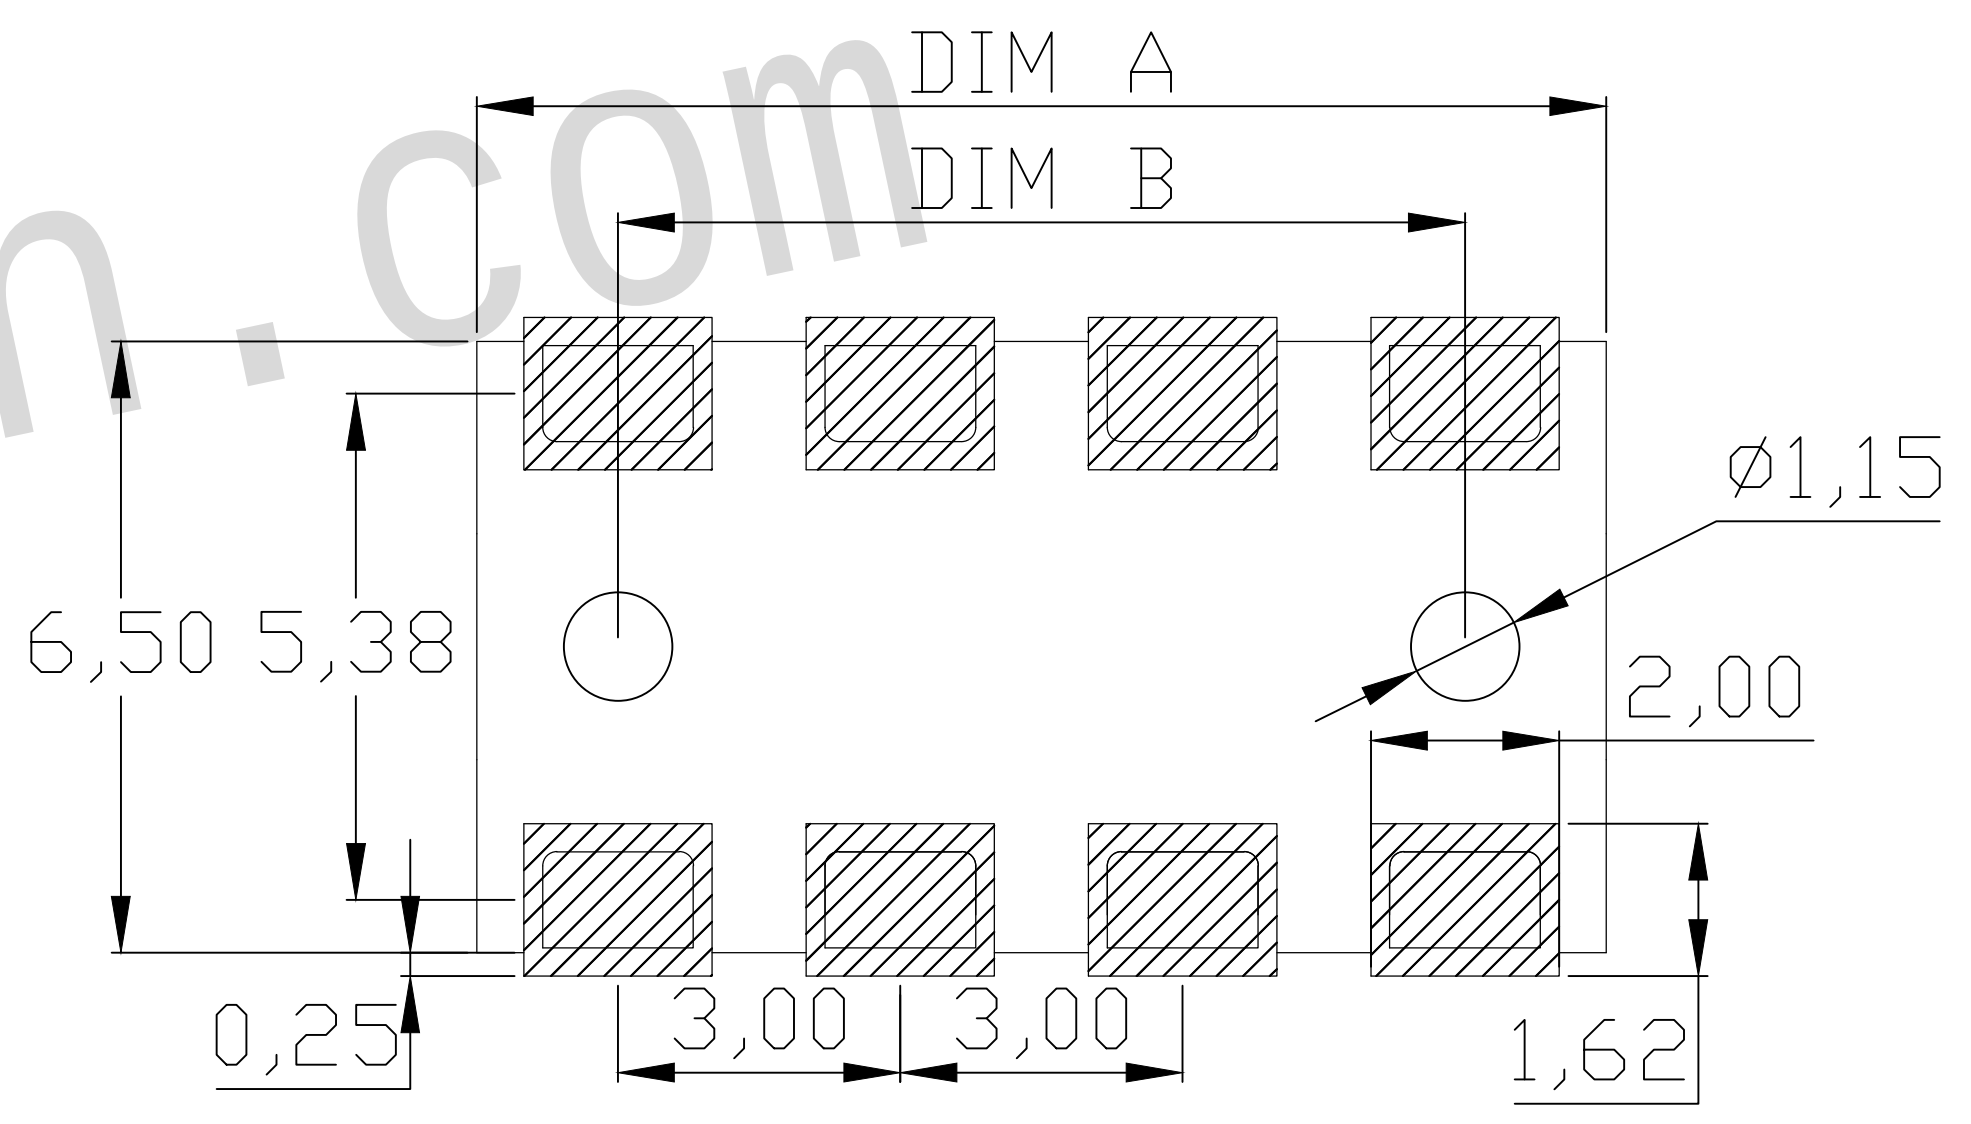


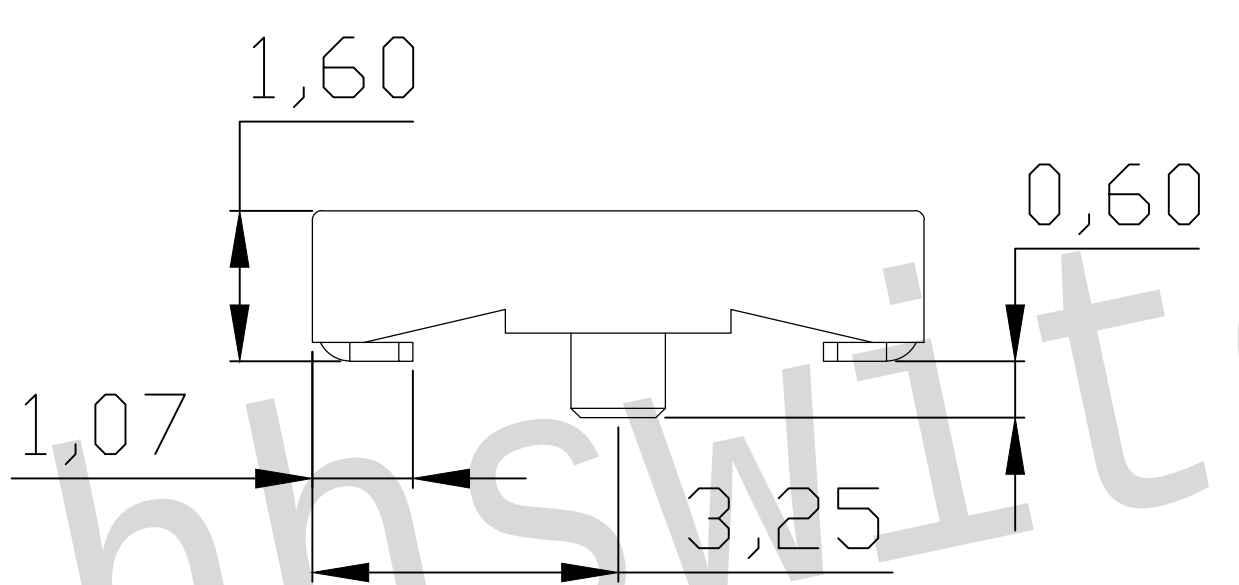


性能:
额定电流: 5.0A
额定电压: 30V
耐电压: 500V
接触电阻: 30mΩ MAX
绝缘电阻: 500MΩ
工作温度: -55℃~+125℃
使用寿命: 10000次以上
塑件(材质): LCP黑色
接触点(材质): 黄铜C2680, 接触面镀金3U"

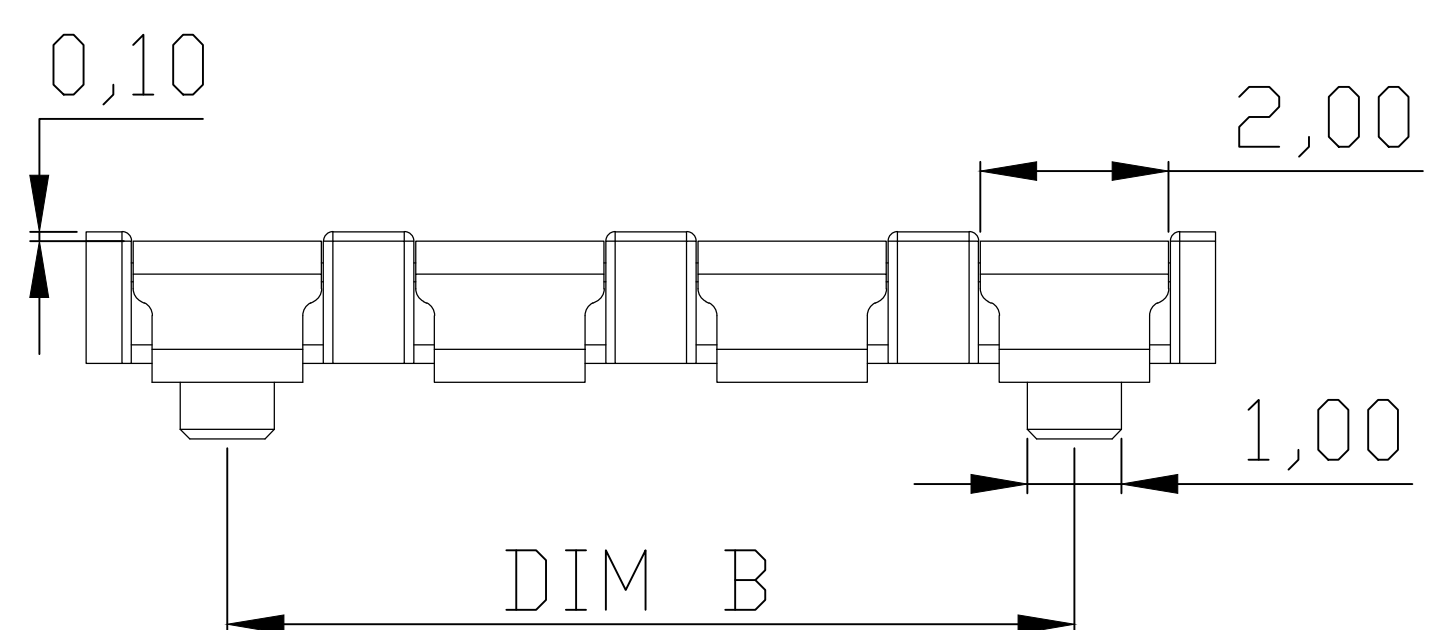

RECOMMENDED PCB LAYOUT
TOP VIEW(.XX±0.05)

规格型号	DIM A	DIM B
BHC062-2PD160	6.0	3.0
BHC062-3PD160	9.0	6.0
BHC062-4PD160	12.0	9.0
BHC062-5PD160	15.0	12.0
BHC062-6PD160	18.0	15.0
BHC062-7PD160	21.0	18.0
BHC062-8PD160	24.0	21.0

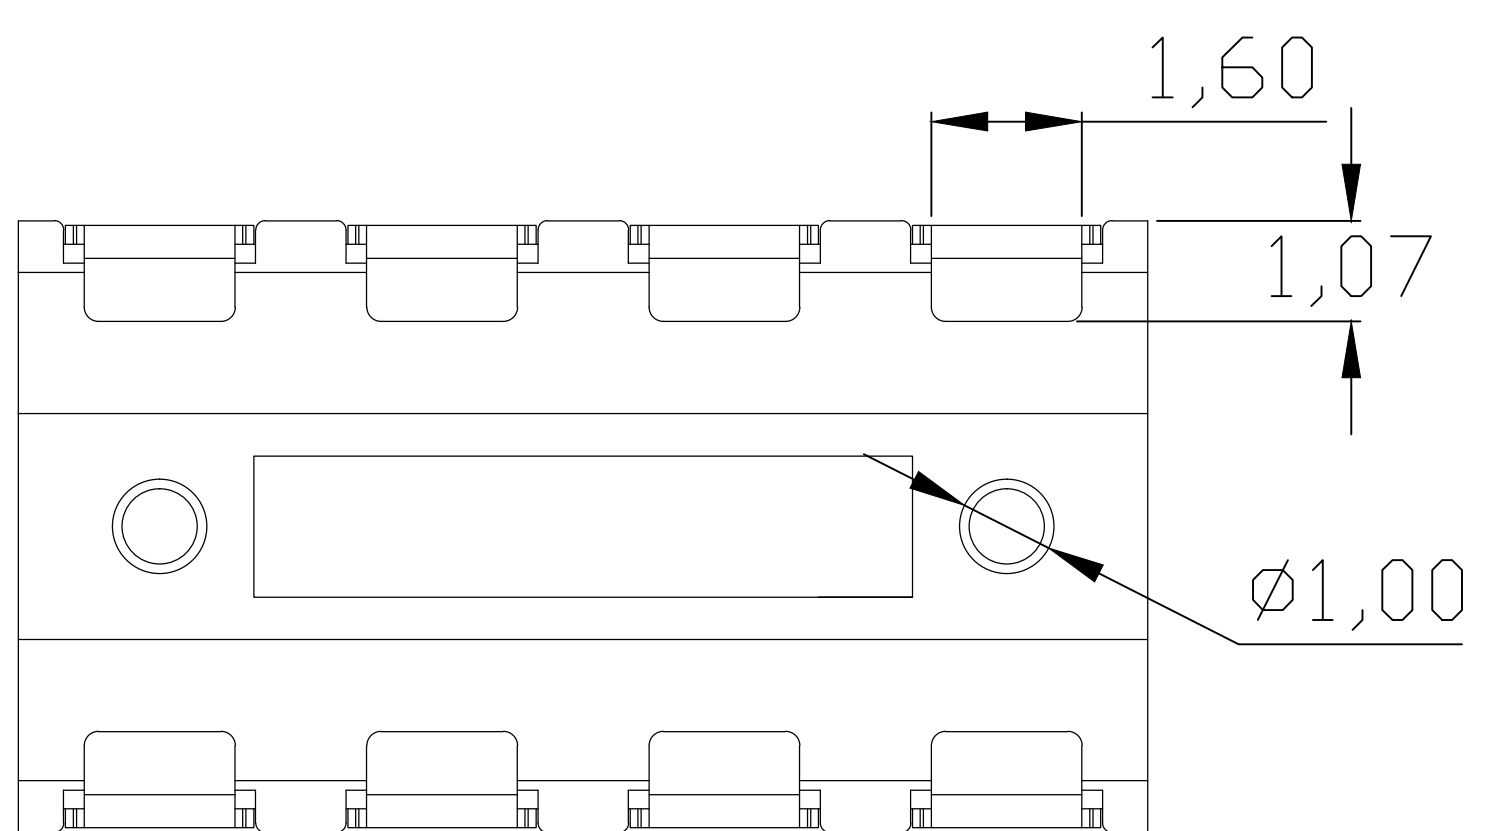

DESIGN	MISS ZENG	SC ALL			未注公差 T00LERANCE		品名: 电 池 连 接 器	 东莞市航宏电子科技有限公司 Dongguan Hanghong Electronics Co.,Ltd.
DRAWIGN	MISS LI	ANIT	MM		X. ±0.35	X.XX ±0.15		
CHECK	Mr. ZENG	SIZE	A4: 210*297		X. X ±0.25	X. XXX ±0.05	型号: BHC062-4PD160	
APPROVAL		VERSION	01					