






性能:

额定电流: 2.0A
额定电压: 12V
耐电压: 500V
接触电阻: 30mΩ
绝缘电阻: 500MΩ
工作温度: -40℃~+85℃
塑件(材质): LCP
接触点(材质): 磷铜, 触点镀金3U",
使用寿命: 5000次以上

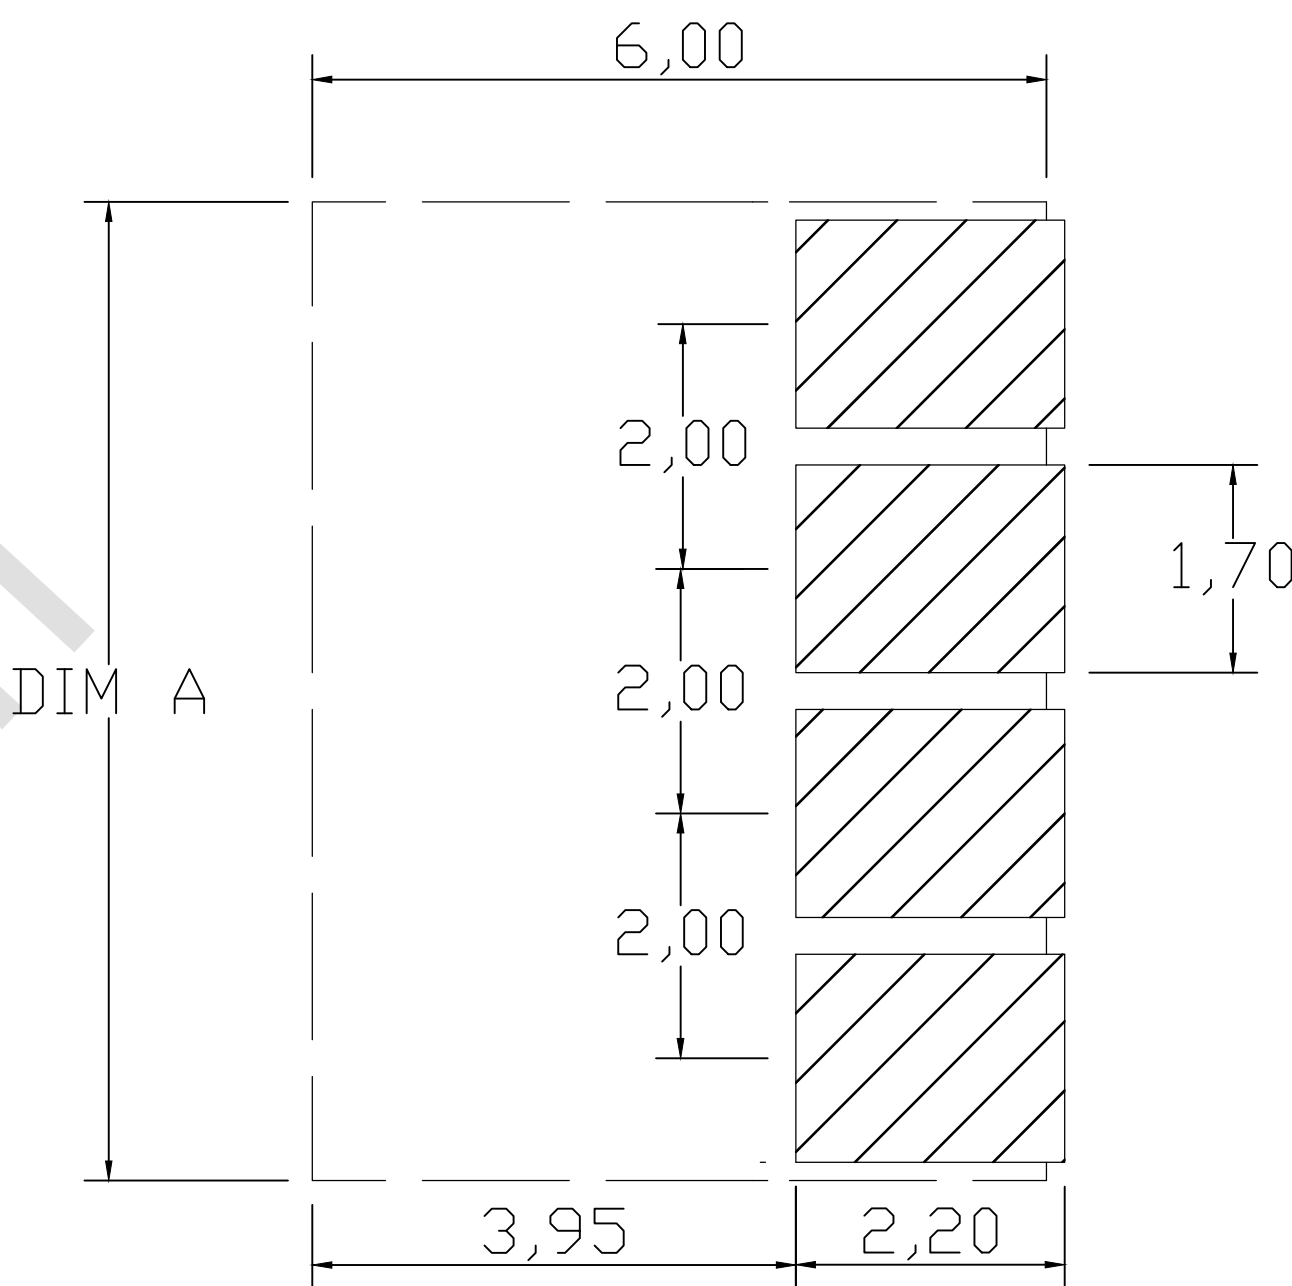

RECOMMENDED PCB LAYOUT
TOP VIEW(. XX±0.05)

Pin数	PART NO.	DIM A
2Pin	BHC012-2P170R1.0	4.0
3Pin	BHC012-3P170R1.0	6.0
4Pin	BHC012-4P170R1.0	8.0
5Pin	BHC012-5P170R1.0	10.0
6Pin	BHC012-6P170R1.0	12.0
7Pin	BHC012-7P170R1.0	14.0
8Pin	BHC012-8P170R1.0	16.0

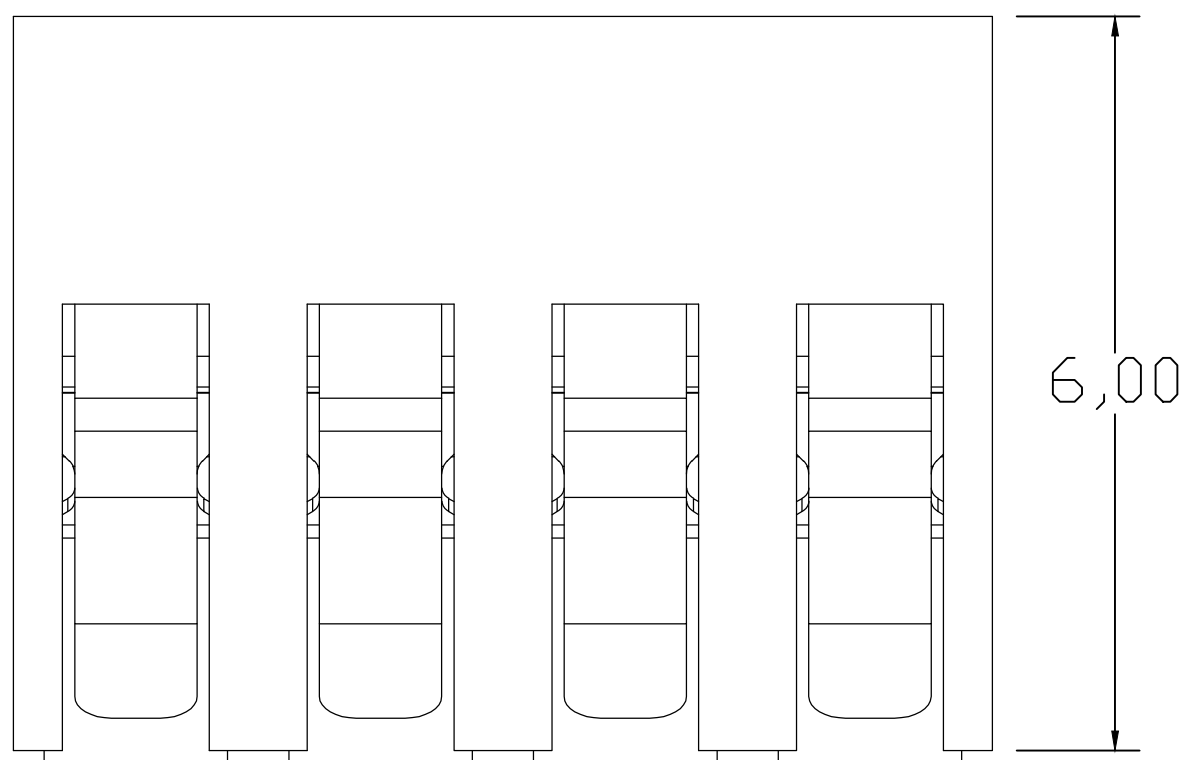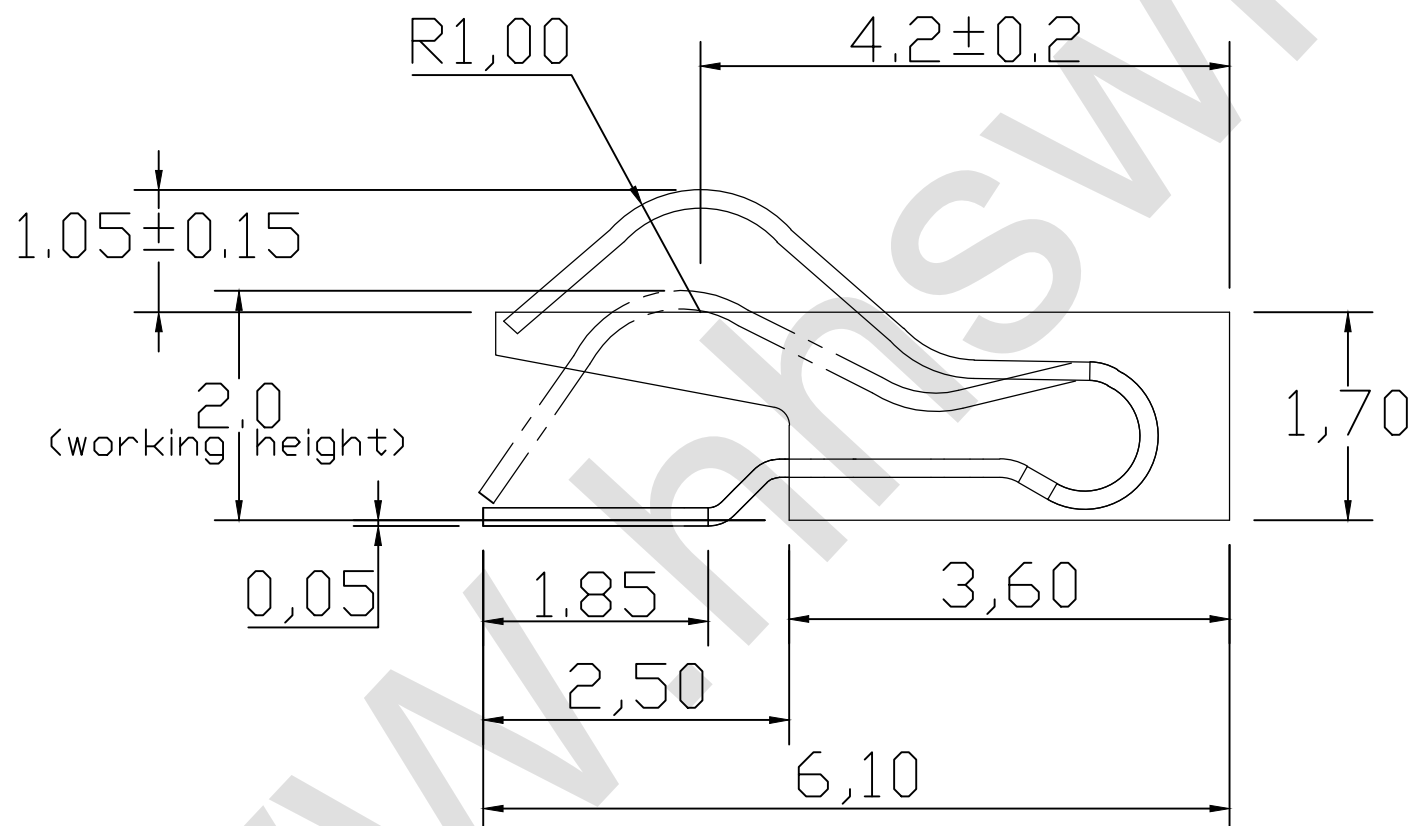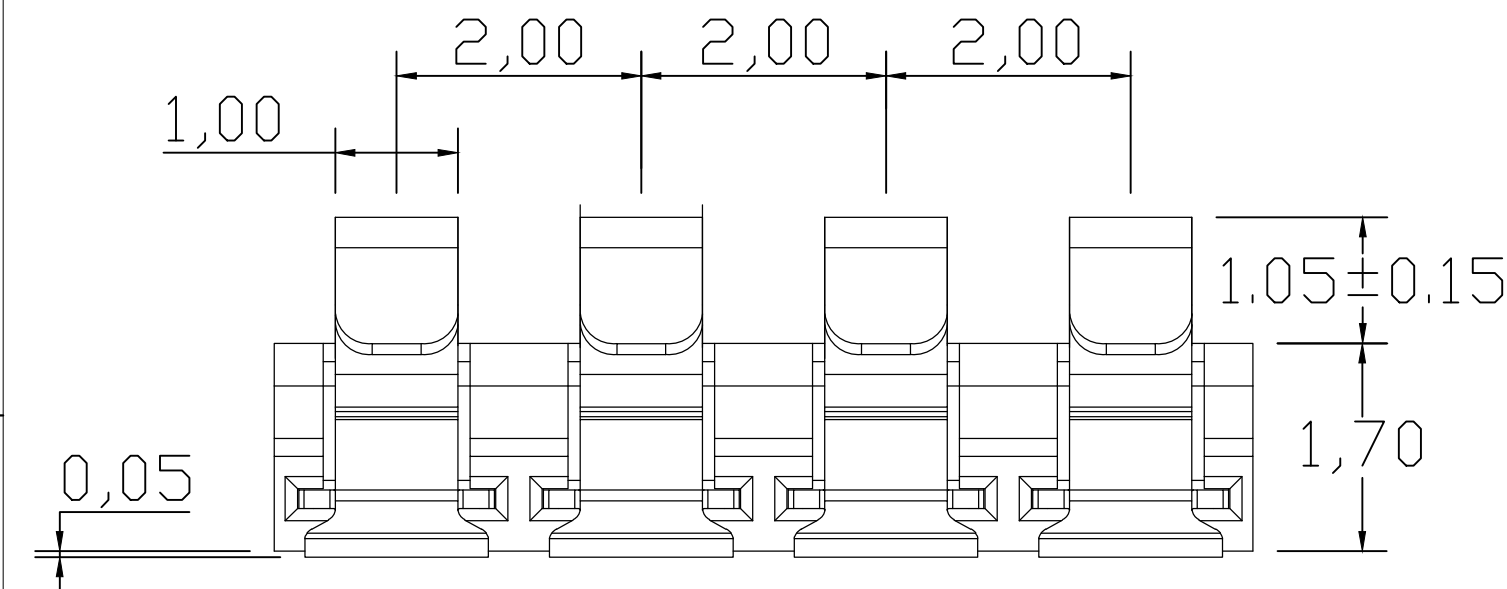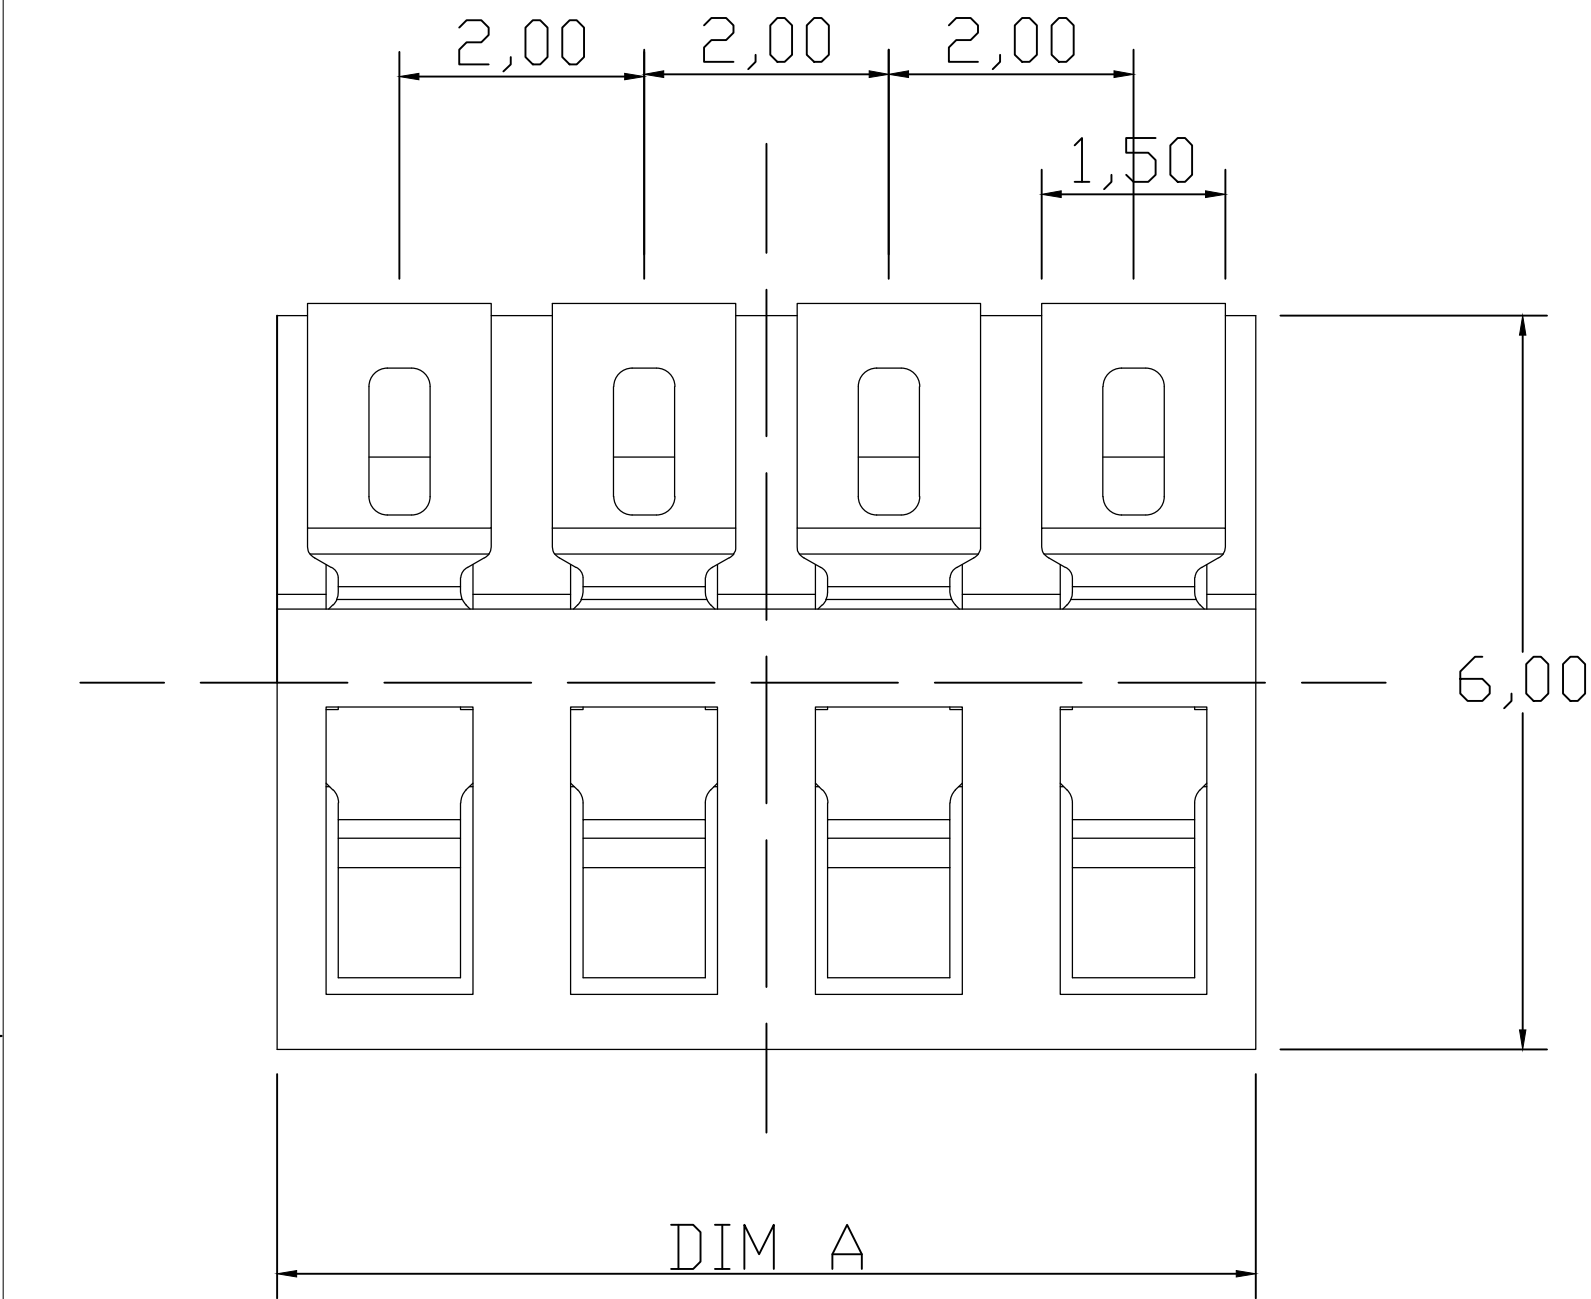

DESIGN	MISS ZENG	SC ALL			未注公差 T00LERANCE		品名: 电 池 连 接 器 型号: BHC012-4P170R1.0
DRAWIGN	MISS LI	ANIT	MM		X. ±0.35	X.XX ±0.15	
CHECK	Mr. ZENG	SIZE	A4: 210*297		X. X ±0.25	X. XXX ±0.05	
APPROVAL		VERSION	01				



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.