


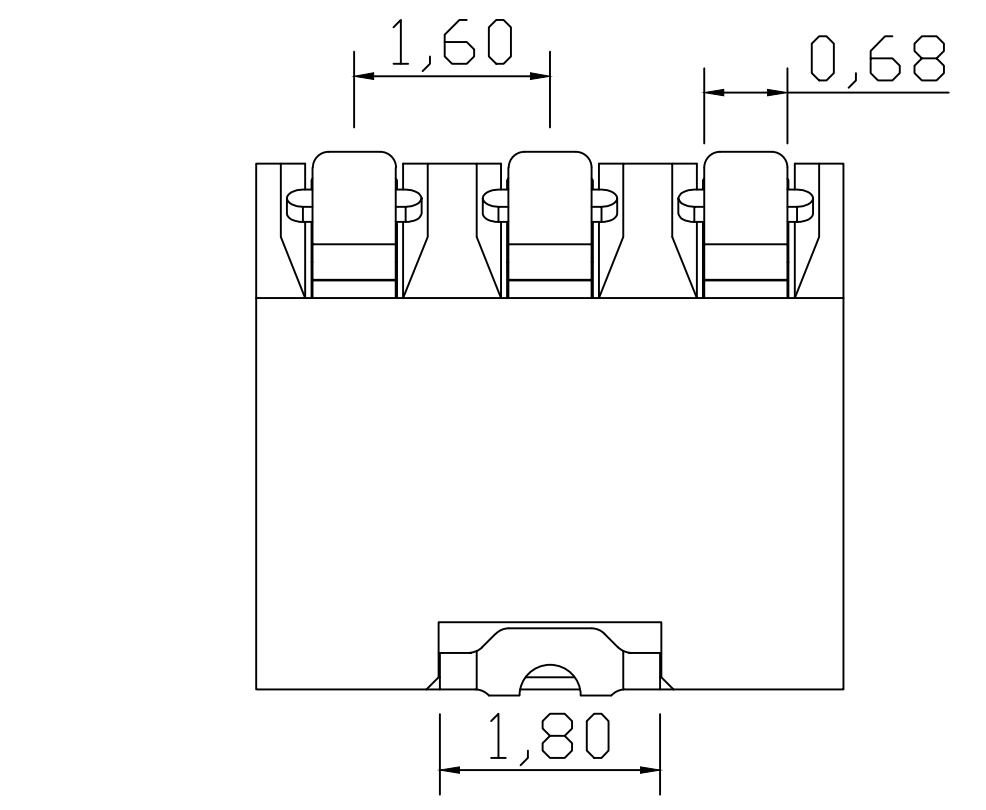
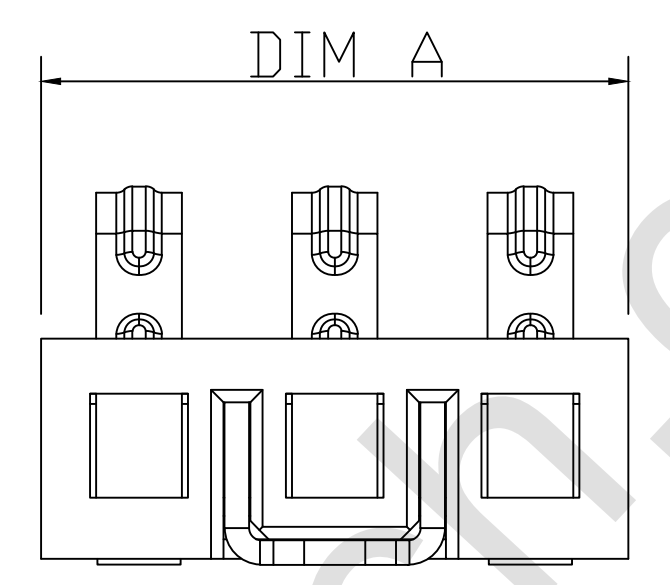
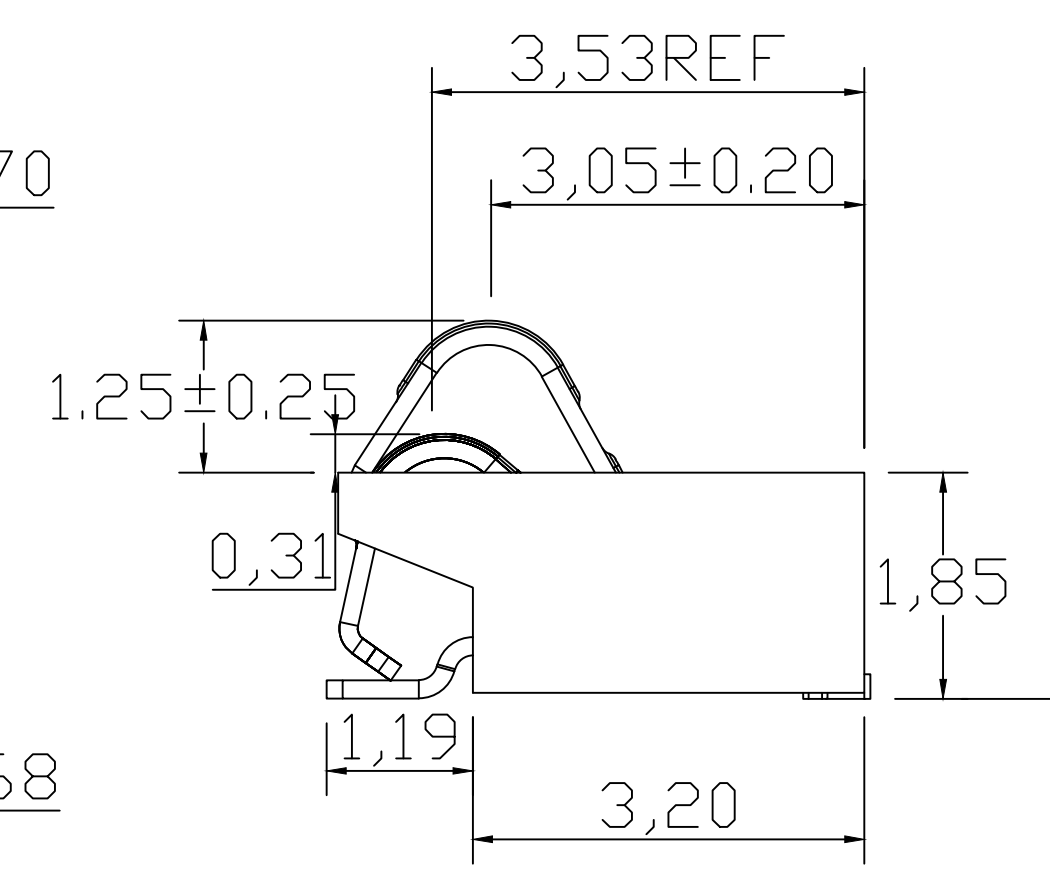
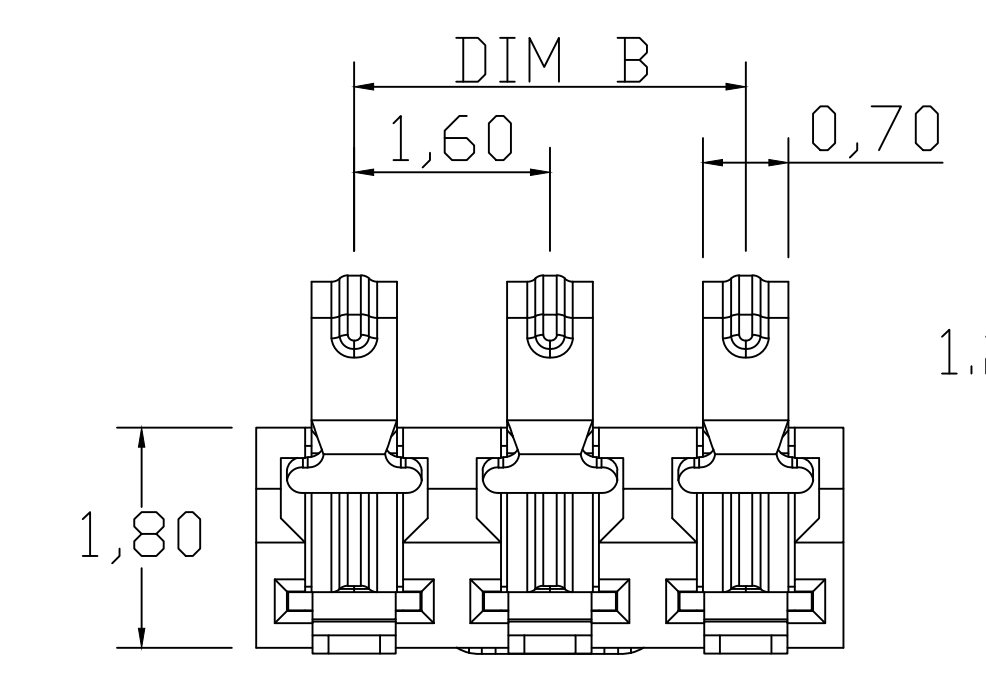


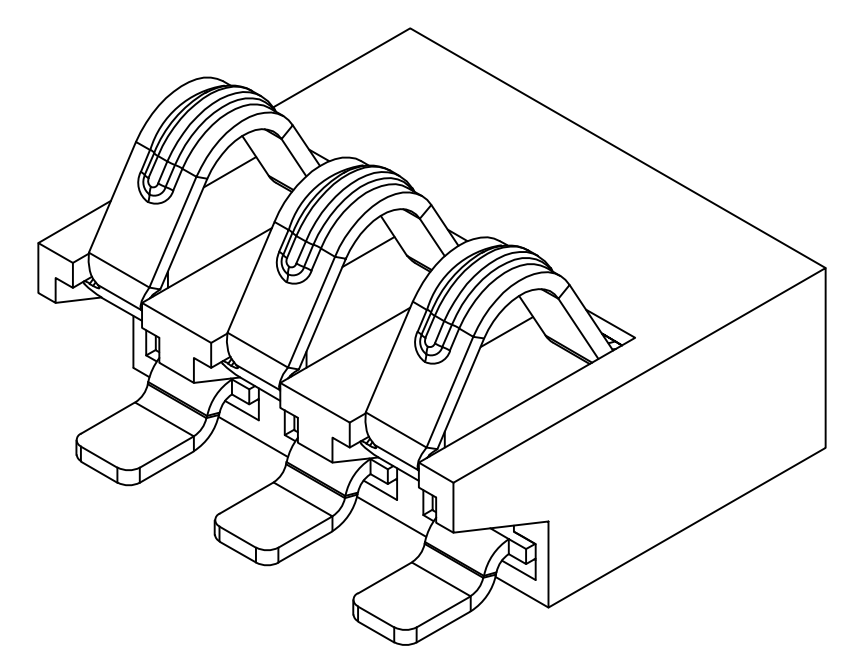

BHC016-10P180R125	16.00	14.40	11.20
BHC016-9P180R125	14.40	12.80	9.60
BHC016-8P180R125	12.80	11.20	8.00
BHC016-7P180R125	11.20	9.60	6.40
BHC016-6P180R125	9.60	8.00	4.80
BHC016-5P180R125	8.00	6.40	3.20
BHC016-4P180R125	6.40	4.80	0
BHC016-3P180R125	4.80	3.20	0
BE FILLED	DIMA	DIMB	DIMC

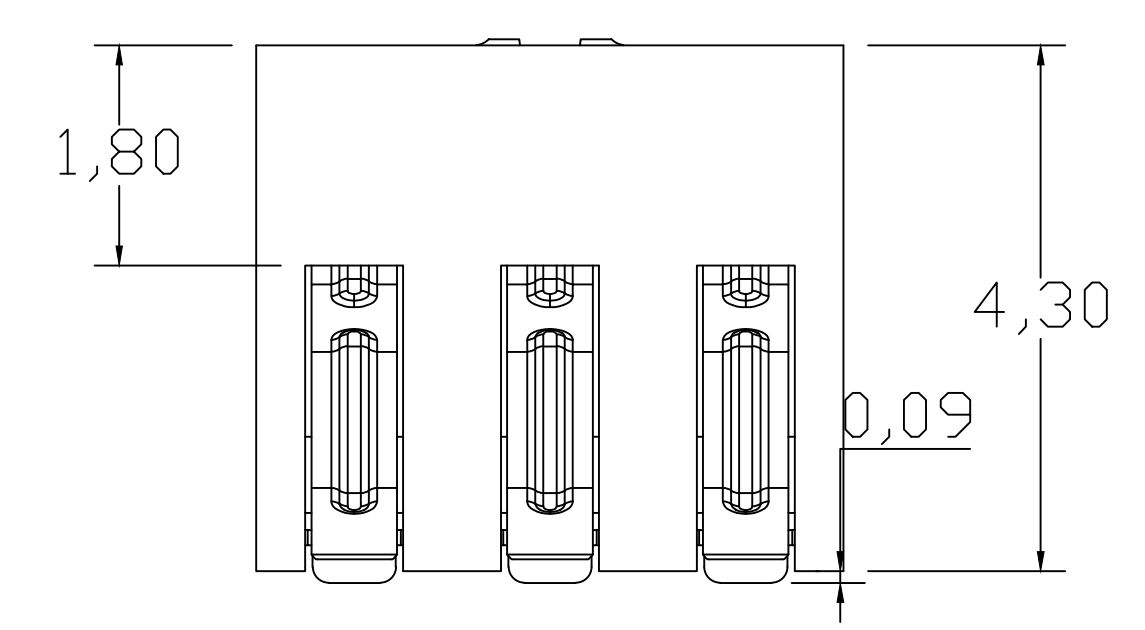

性能：
额定电流：2.0A
额定电压：12V
耐电压：500V
接触电阻：30mΩ MAX
绝缘电阻：500MΩ
工作温度：-40℃~+85℃
塑件（材质）：LCP
接触点（材质）：磷铜，触点镀金3U”，
使用寿命：3000次以上

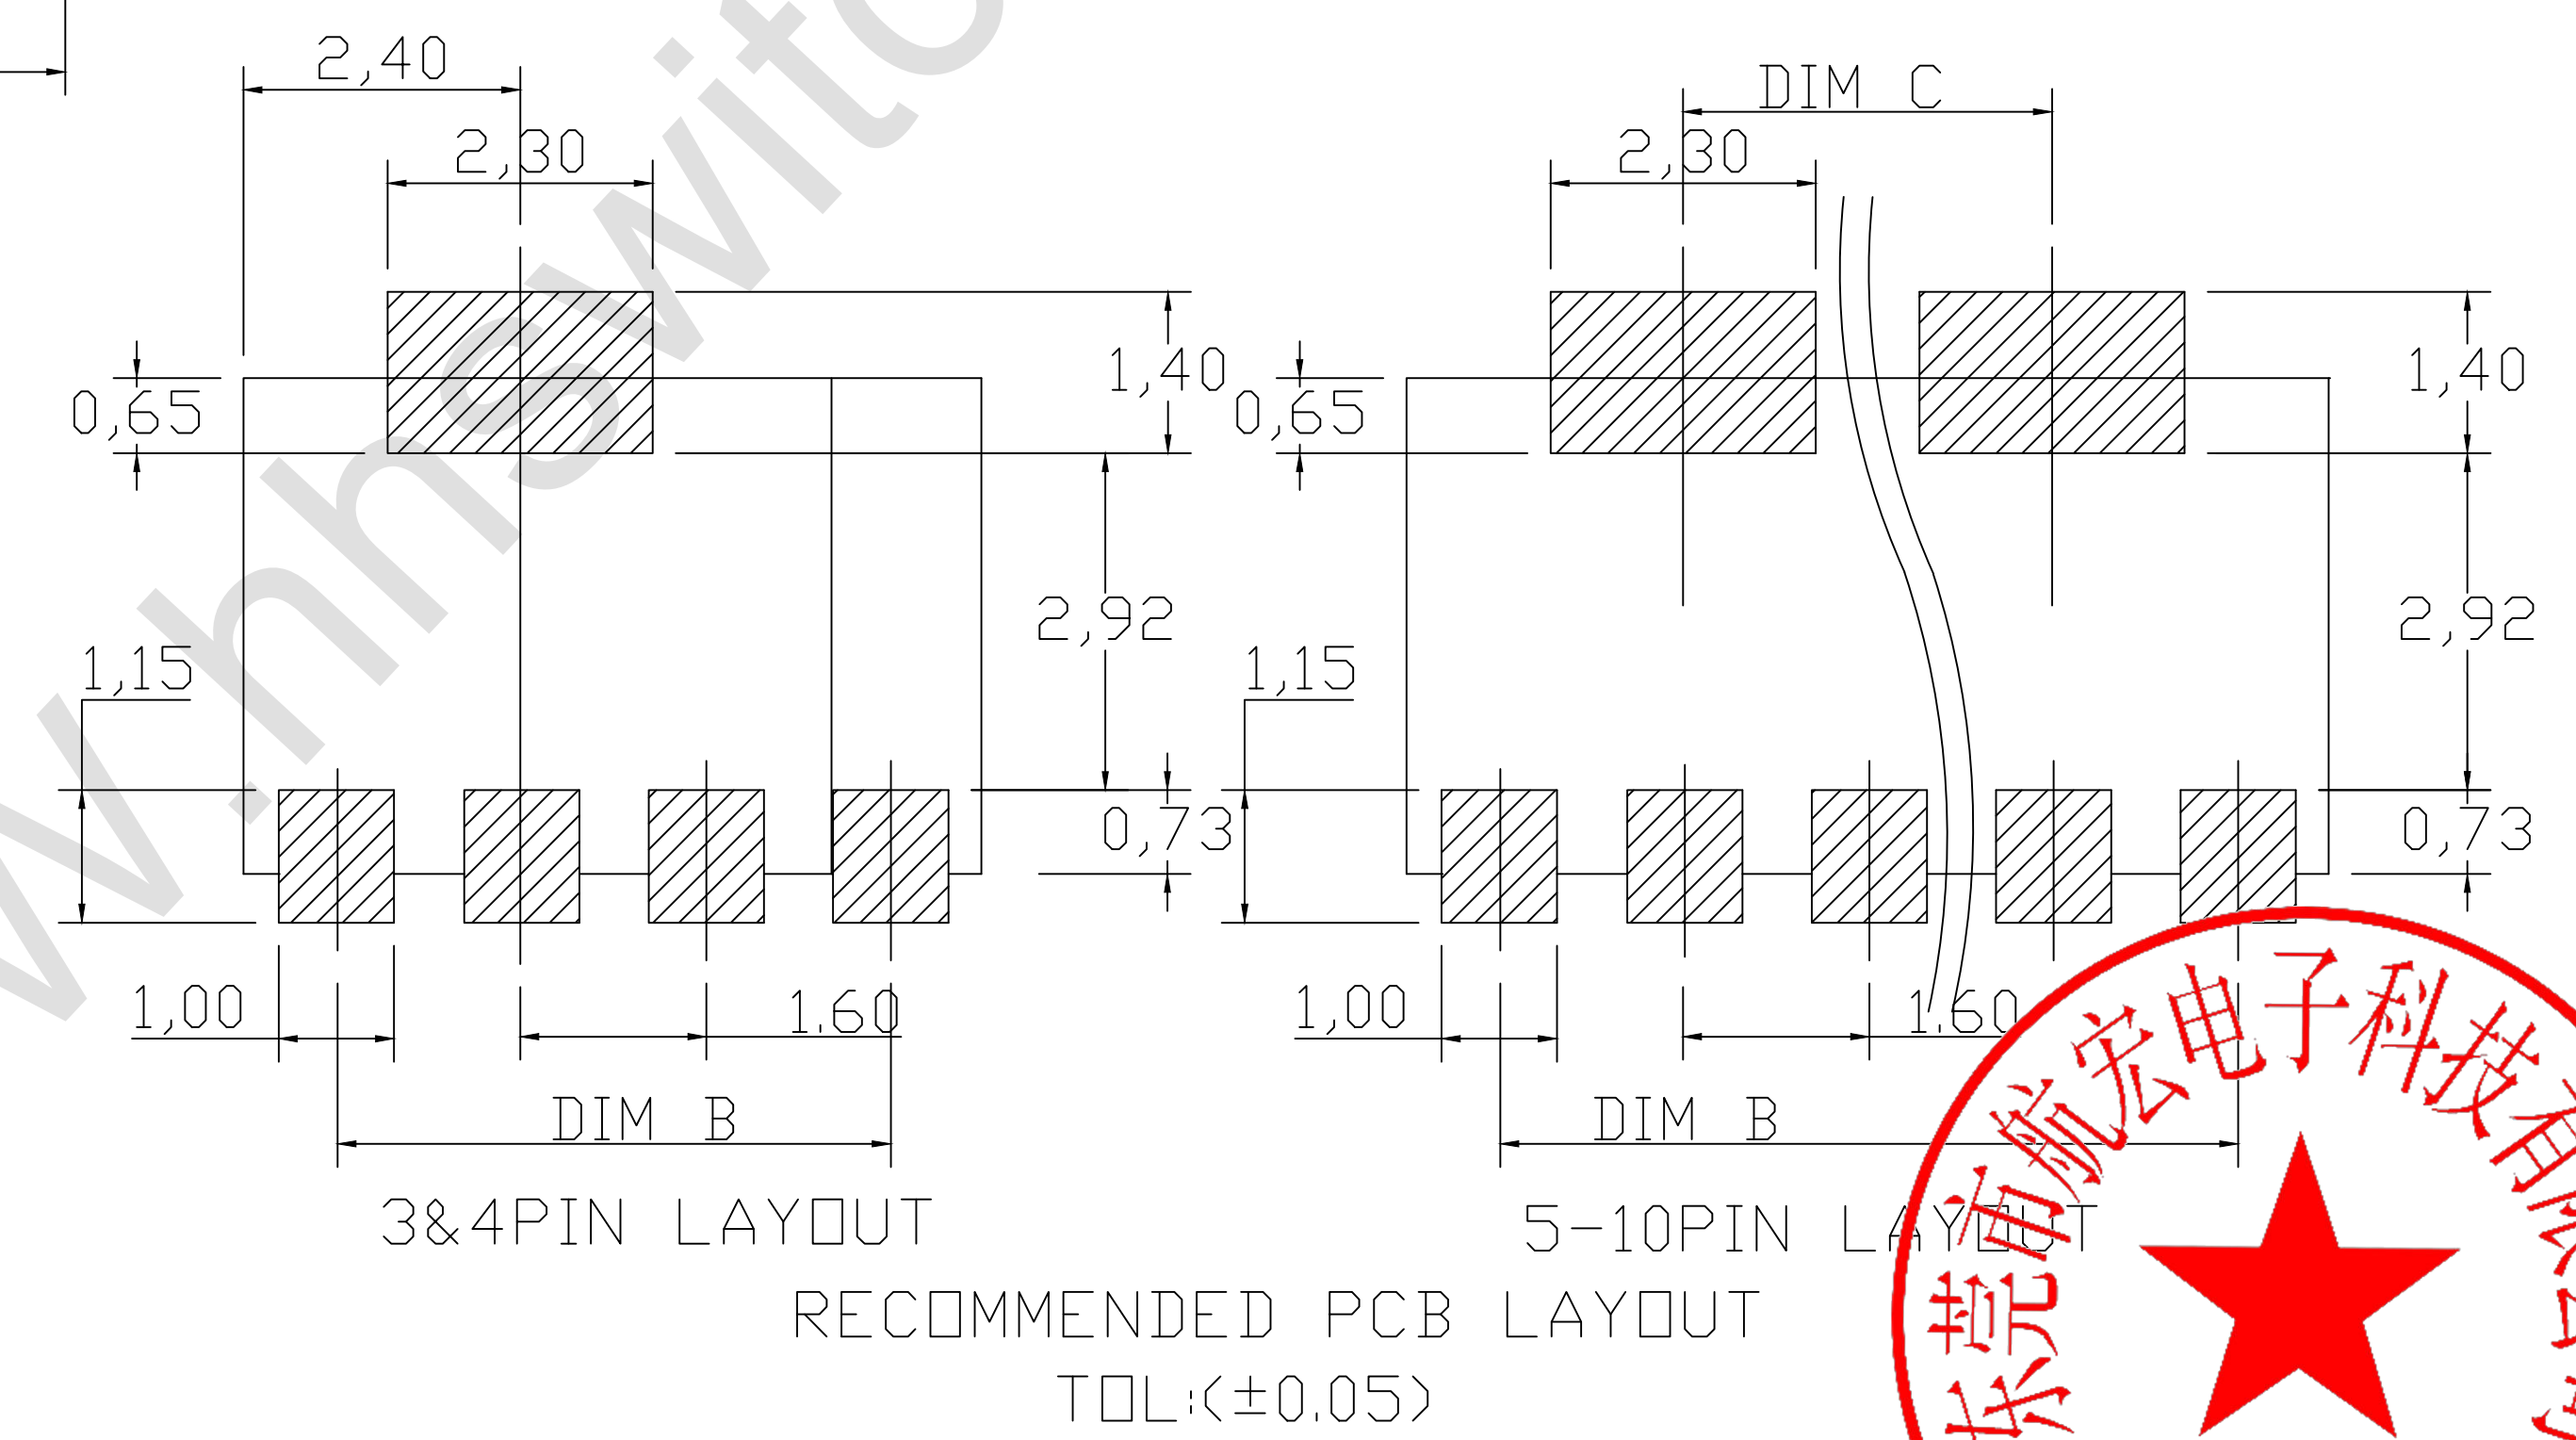

DESIGN	MISS ZENG	SC ALL			未注公差 T00LERANCE		品名： 电 池 连 接 器 型号： BHC016-4PD180R125
DRAWIGN	MISS LI	ANIT	MM		X. ±0.35	X.XX ±0.15	
CHECK	Mr. ZENG	SIZE	A4: 210*297		X. X ±0.25	X. XXX ±0.05	
APPROVAL		VERSION	01				



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.