
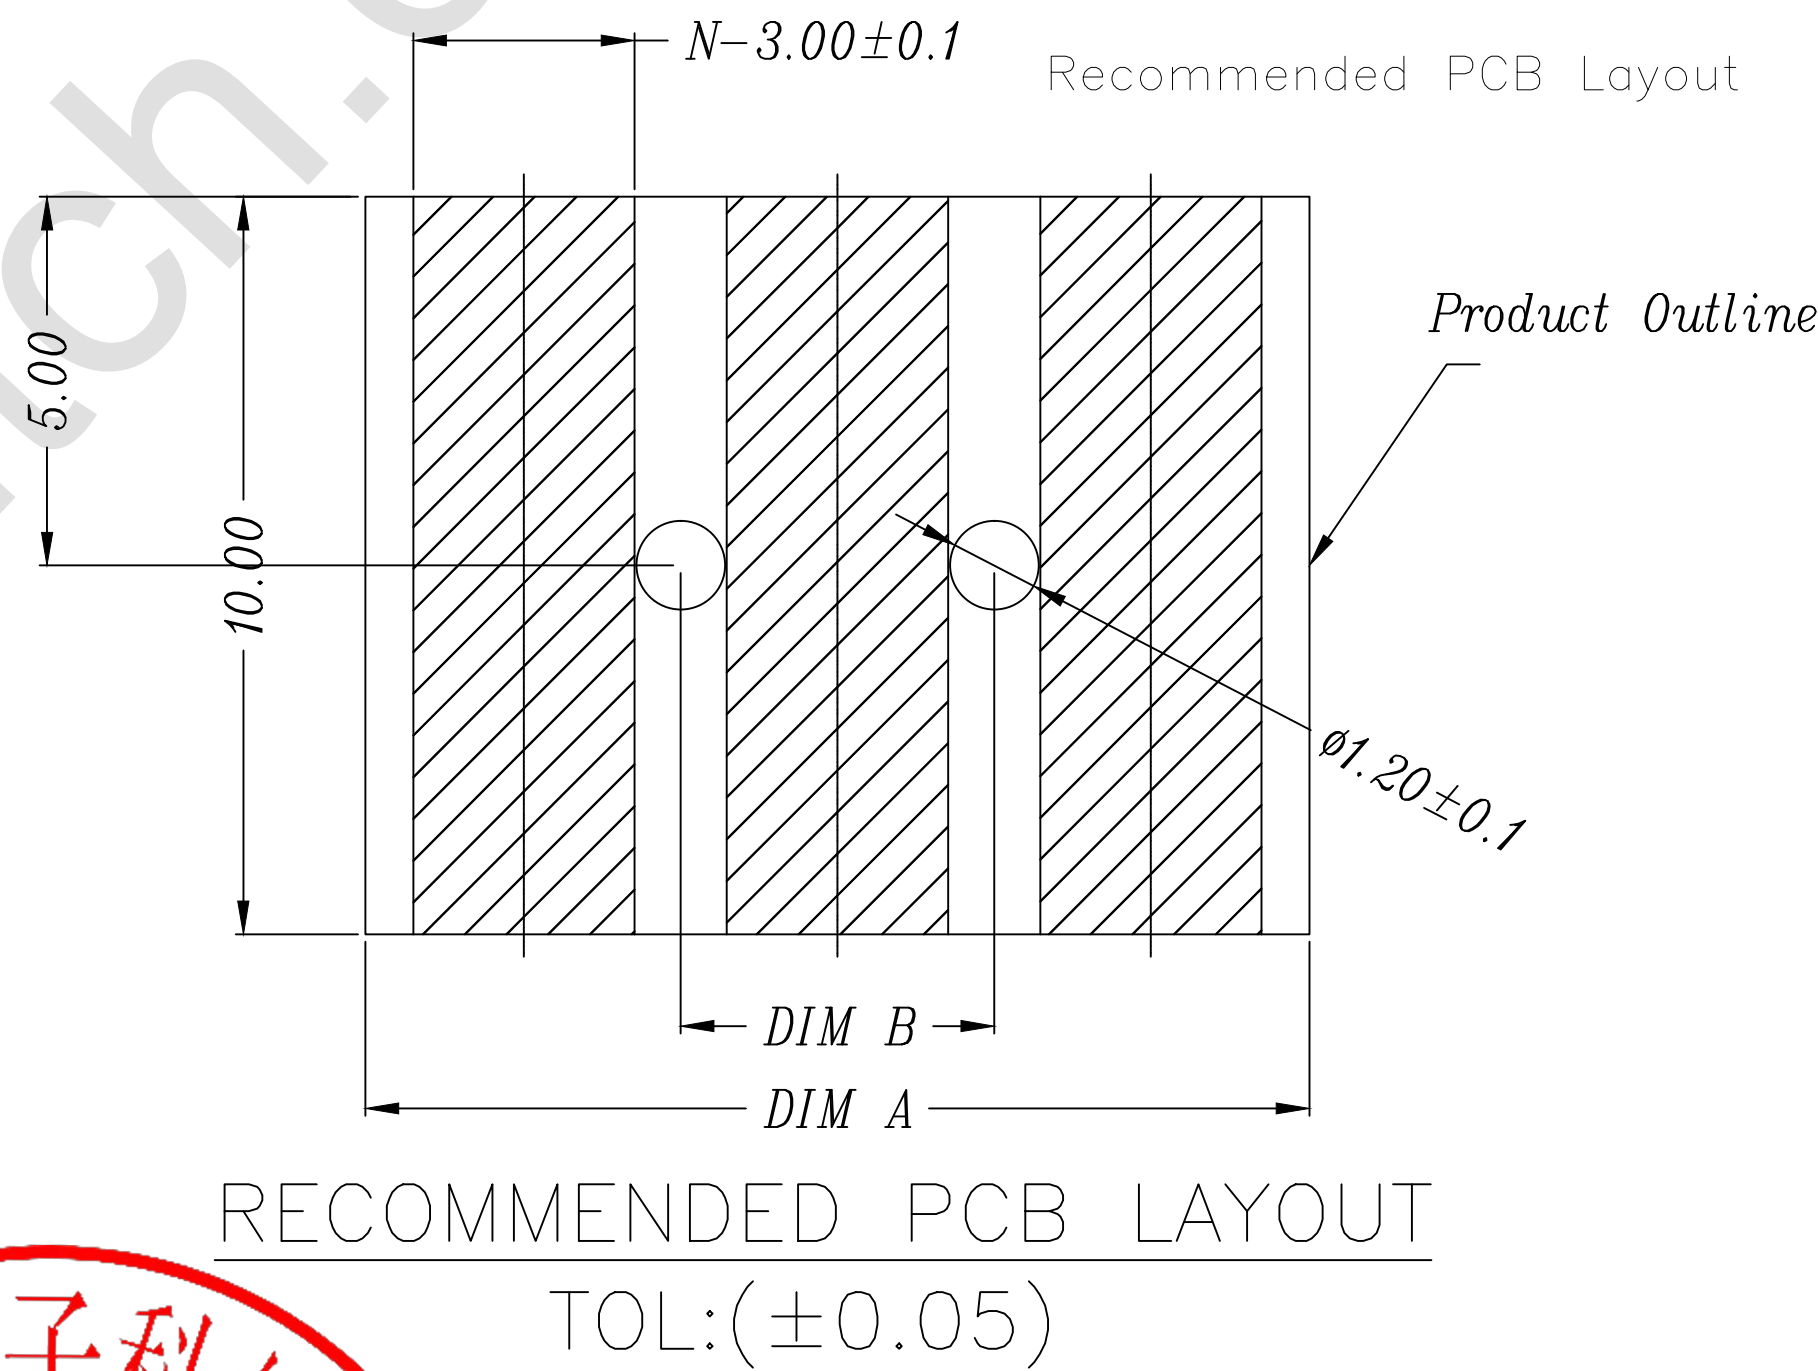
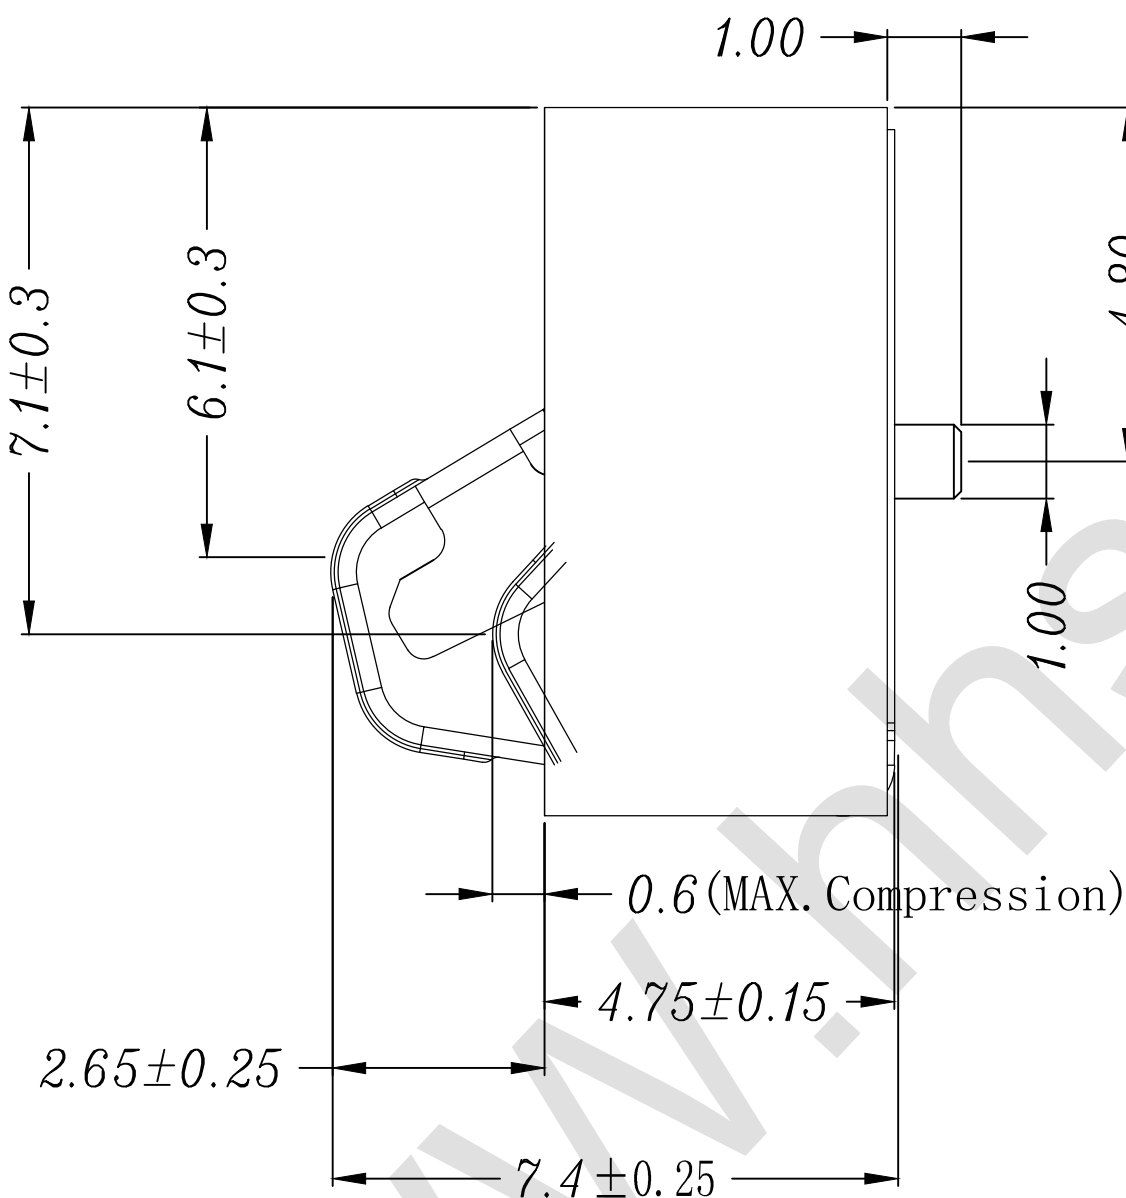
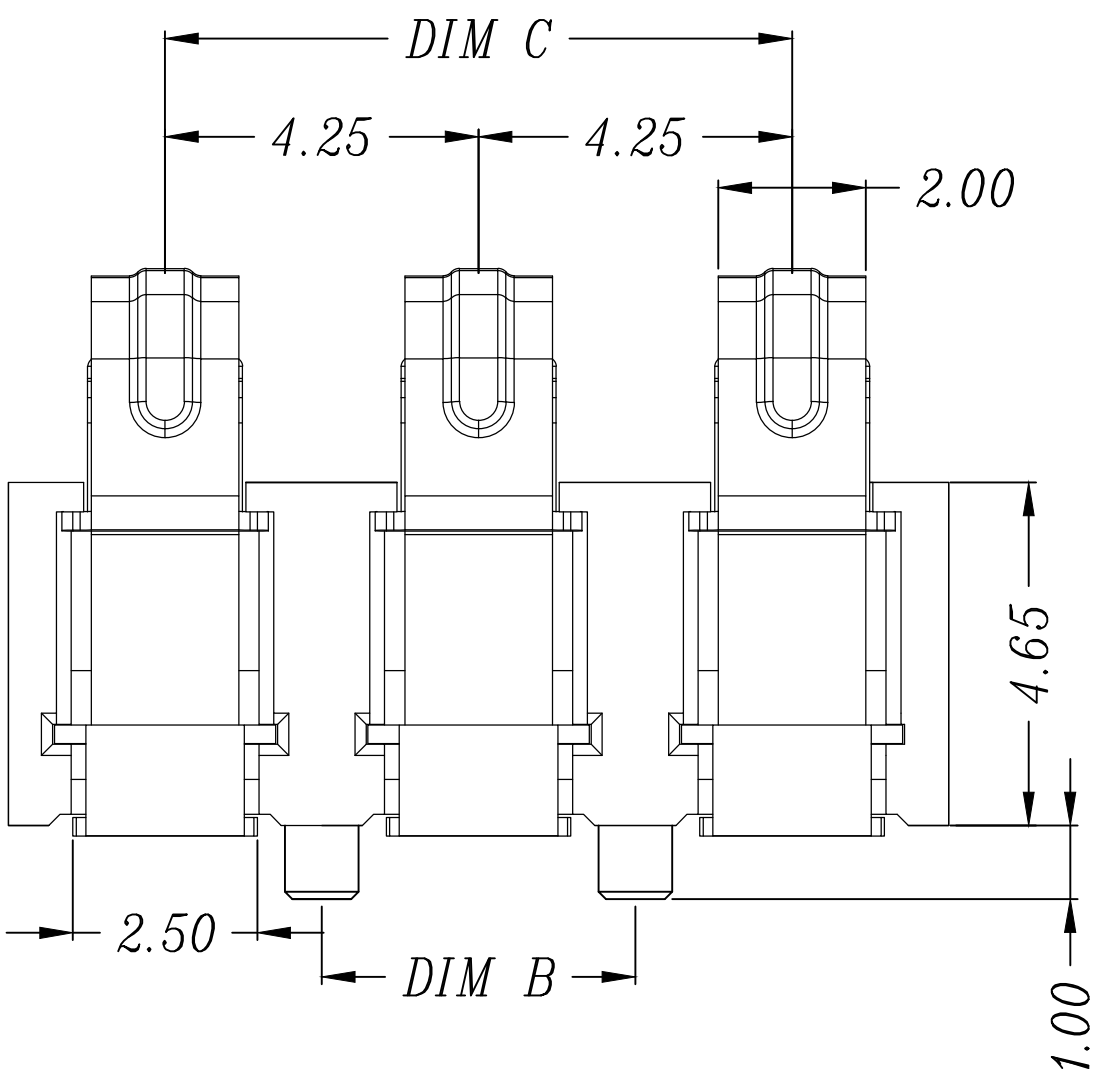
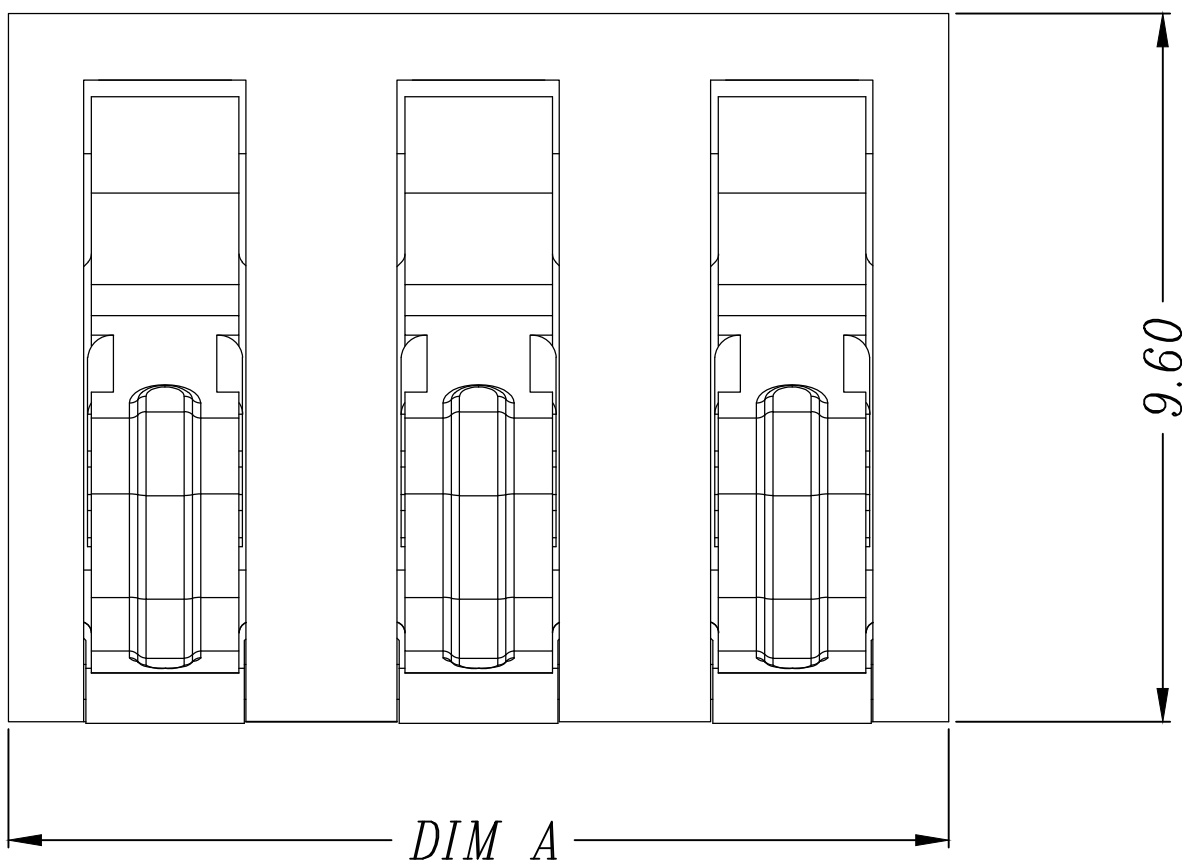


性能：
额定电流：5.0A
额定电压：30V
耐电压：500V
接触电阻：30mΩ Max
绝缘电阻：500MΩ Min
工作温度：-40℃~+85℃
塑件（材质）：LCP
接触点（材质）：磷铜，触点镀金3U”，
使用寿命：5000次以上

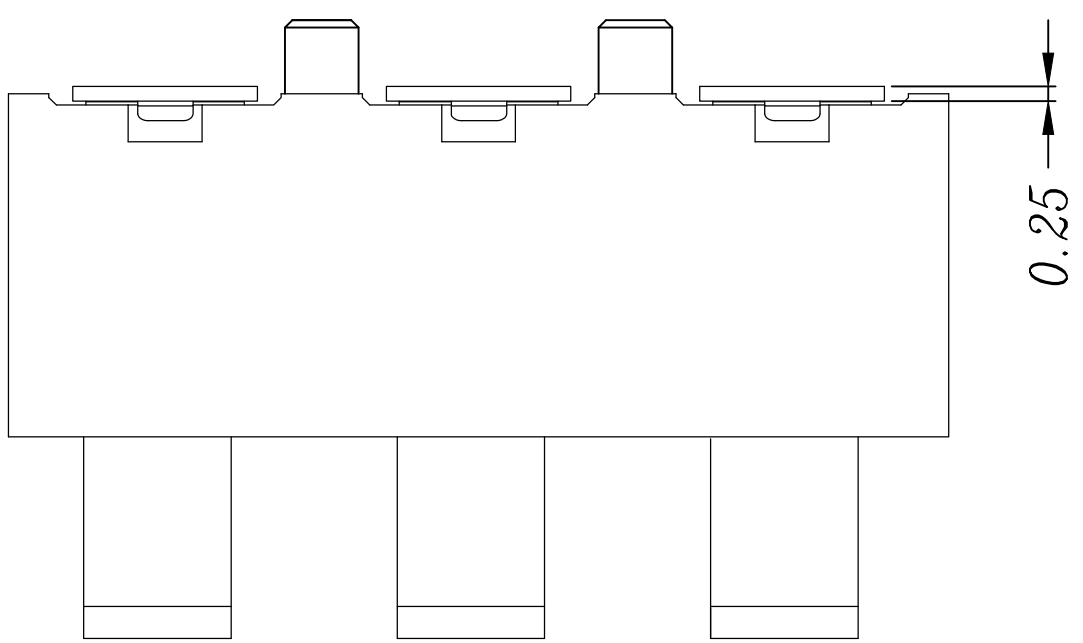

Pin数(N)	PART NO.	DIM A	DIM B	DIM C
3Pin	BHC046-3PD475F	12.75	4.25	8.5
4Pin	BHC046-4PD475F	17.0	8.5	12.75
5Pin	BHC046-5PD475F	21.25	12.75	17.0
6Pin	BHC046-6PD475F	25.5	17.0	21.25

DESIGN	MISS ZENG	SC ALL			未注公差 T00LERANCE		品名： 电 池 连 接 器
DRAWIGN	MISS LI	ANIT	MM		X. ±0.35	X.XX ±0.15	
CHECK	Mr. ZENG	SIZE	A4: 210*297		X. X ±0.25	X. XXX ±0.05	
APPROVAL		VERSION	01				

品名： 电 池 连 接 器
型号： BHC046-4PD475F

 **东莞市航宏电子科技有限公司**
Dongguan Hanghong Electronics Co., Ltd.