

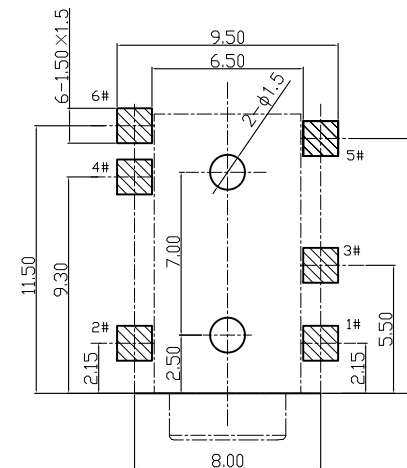

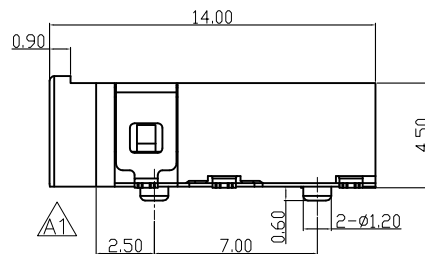

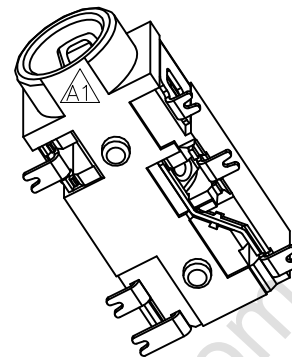

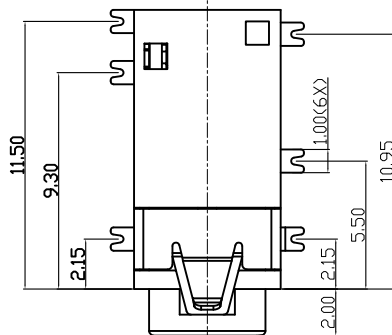


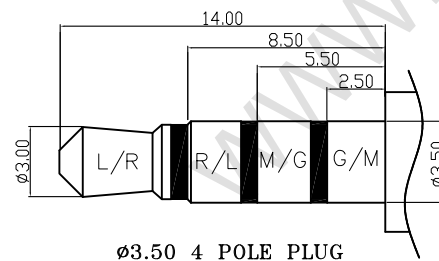

RECOMMEND PCB LAYOUT
TOLERANCE ±0.05

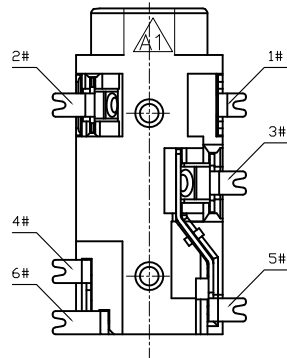


4 POLE PLUG

NOTES:

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 50 m MAX.;
3. INSULATION RESISTANCE: 1000 MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 29.4N (3.00Kgf) MAX.;
7. CONNECTOR UNMATING FORCES: 2.94N(0.30Kgf) MIN.;
8. PRODUCT MEET THE REQUEST OF THE RoHs, SEE TABLE A:

MATTER	RoHs (PPM)
Cd	≤ 100
Pb	≤ 1000
Hg	≤ 1000
Cr6+	≤ 1000
PBB	≤ 1000
PBDE	≤ 1000



SCHEMATIC

⑦	HOUSING	1		Black
⑥	CONTACT F	1	Au-Plated	
⑤	CONTACT E	1	Au-Plated	
④	CONTACT D	1	Au-Plated	
③	CONTACT C	1	Au-Plated	
②	CONTACT B	1	Au-Plated	
①	CONTACT A	1	Au-Plated	
ITEM	PART NAME	Q'TY	DESCRIPTION	REMARK

DESIGN	MISS ZENG	SC ALL		未注公差 TOLERANCE	品名 :
DRAWIGN	MISS LI	ANIT	MM	X. ±0.25 X.xxx ±0.10	耳机插座
CHECK	Mr. ZENG	SIZE	A4 : 210*297	X.x ±0.20 ANGULAR ±3°	型号 :
APPROVAL		VERSION	01	X.xx ±0.15	PJ-326 全平



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.