
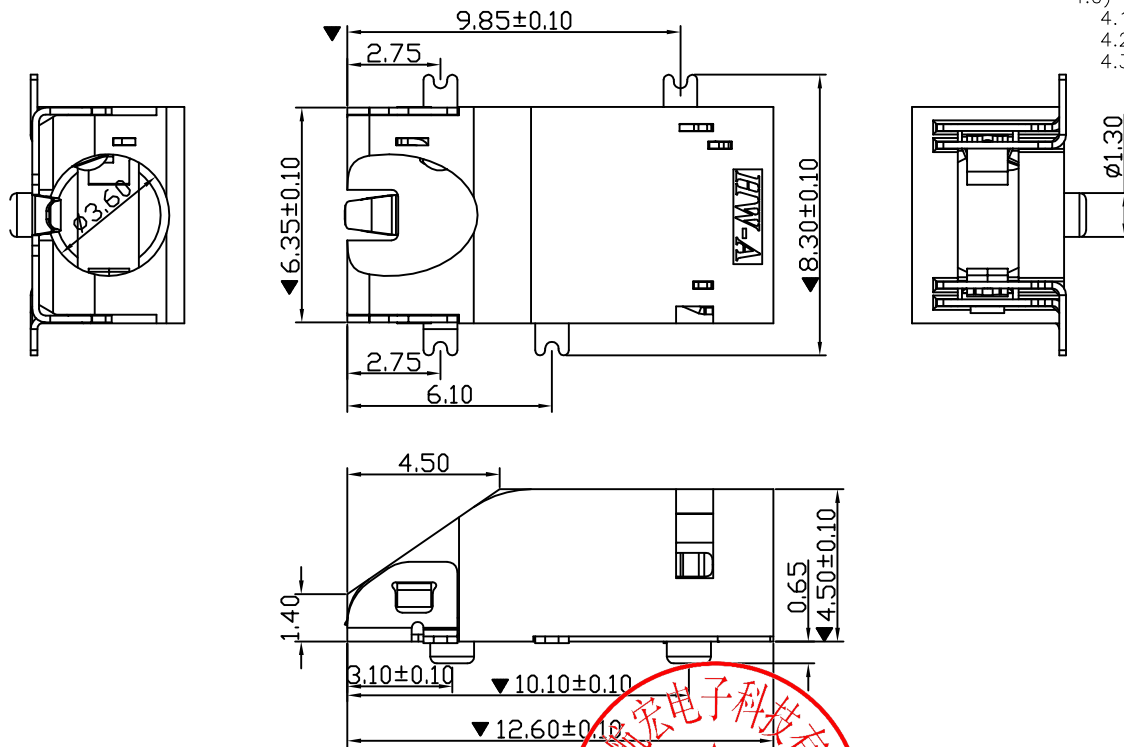


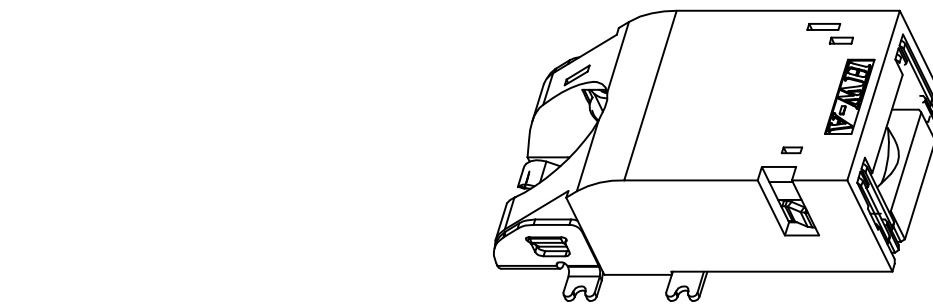

- NOTES :
- 1.0) MATERIAL&FINISH:
 - 1.1 SEE TABLE A.
 - 2.0) RATING :
 - 2.1. VOLTAGE : 12 VDC (R.M.S.)
 - 2.2. CURRENT : 1 AMPERE MAXIMUM PER CONTACT AT 30° T-RISE
 - 2.3. TEMPERATURE : -25° TO +85°
 - 3.0) ELECTRICAL CHARACTERISTIC
 - 3.1. CONTACT RESISTANCE : INITIAL 50m MAX. AFTER 100m
 - 3.2. INSULATION RESISTANCE : 100 M MIN.
 - 3.3. DIELECTIC WITHSTANDING VOLTAGE : 500 VAC AT SEA LEVEL
 - 4.0) MECHANICAL :
 - 4.1. DURABILITY ,MINIMUM: MATED 5000 CYCLES WITHOUT DEGRADING ELECTRICAL
 - 4.2. INITIAL:MATING FORCE: 300g~2000g.UNMATING FORCE: 200g~2000g
 - 4.3. AFTER LIFE TESTING:MATING FORCE: 300g~2000g.UNMATING FORCE: 200g~2000g

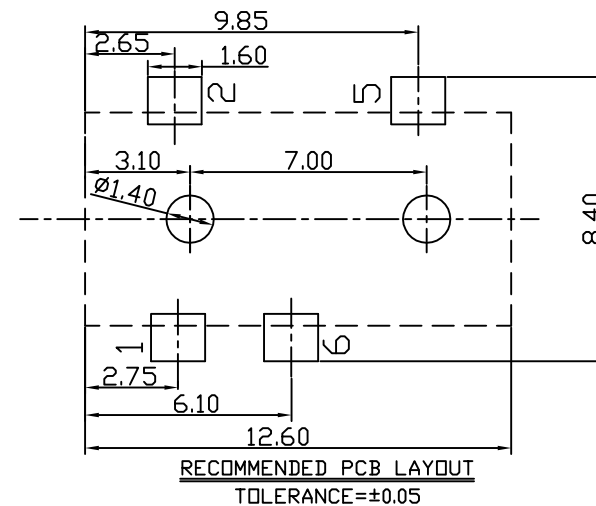


TABLE A:

5	HOUSING	1	9T
4	CONTACT 4	1	C5191R-EH/CONTACT AREA GOLD PLAT
3	CONTACT 3	1	C5191R-EH/CONTACT AREA GOLD PLAT
2	CONTACT 2	1	C5191R-EH/CONTACT AREA GOLD PLAT
1	CONTACT 1	1	C5191R-EH/CONTACT AREA GOLD PLAT
ITEM	NAME	Q'TY	MATERIAL / FINISH

DESIGN	MISS ZENG	SC ALL		TOLERANCE	ANGLES
DRAWIGN	MISS LI	ANIT	mm	X. ±0.30	X. ±2.0°
CHECK	Mr. ZENG	SIZE	A4 : 210*297	.X ±0.20	.X ±1.0°
APPROVAL		VERSION	01	.XX ±0.10	.XX ±0.5°
				.XXX ±0.05	

品名：

耳机插座

型号：

PJ-35159



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.