

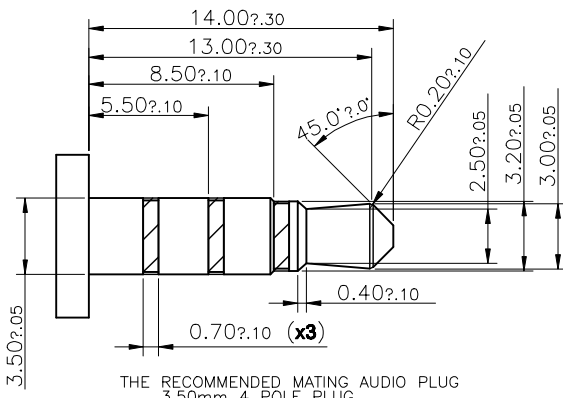
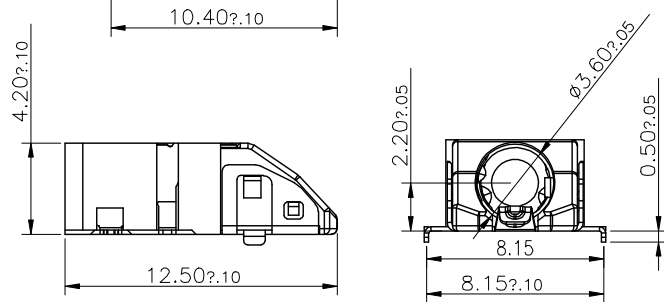

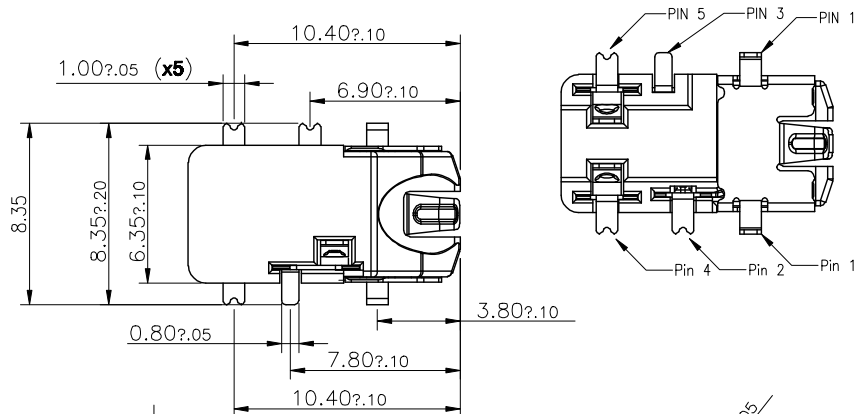




THE RECOMMENDED AUDIO PLUG
3.50mm 4 POLE PLUG



NOTES :

1.0) RATING :




- 1.1. VOLTAGE : 12 VDC (R.M.S.)
- 1.2. CURRENT : 1 AMPERE MAXIMUM PER CONTACT AT 30° T-RISE
- 1.3. TEMPERATURE : -25° TO +85°

2.0) ELECTRICAL CHARACTERISTIC

- 2.1. CONTACT RESISTANCE : INITIAL 50mΩ MAX. AFTER 100m
- 2.2. INSULATION RESISTANCE : 100 MΩ MIN.
- 2.3. DIELECTRIC WITHSTANDING VOLTAGE : 500 VAC AT SEA LEVEL

3.0) MECHANICAL :

- 3.1. DURABILITY ,MINIMUM: MATED 5000 CYCLES WITHOUT DEGRADING ELECTRICAL
- 3.2. INITIAL:MATING FORCE: 300g~2000g.UNMATING FORCE: 300g~2000g
- 3.3. AFTER LIFE TESTING:MATING FORCE: 300g~2000g.UNMATING FORCE: 300g~2000g

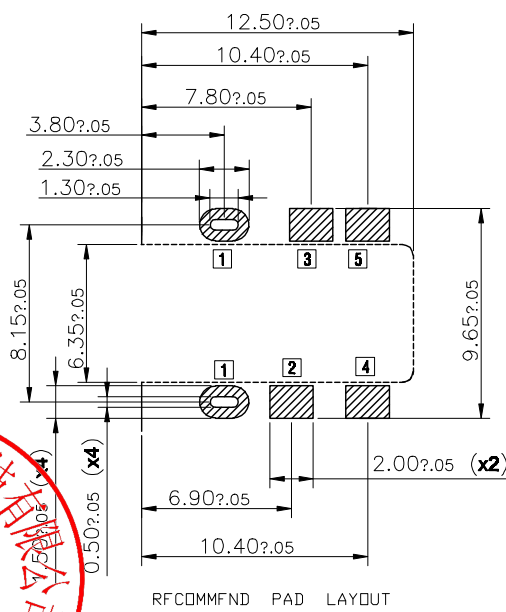

RF COMMEND PAD LAYOUT

DESIGN	MISS ZENG	SC ALL			TOLERANCE	ANGLES	品名 :
DRAWIGN	MISS LI	ANIT	mm		X. ±0.30	X. ±2.0°	耳机插座
CHECK	Mr. ZENG	SIZE	A4 : 210*297		.X ±0.20	.X ±1.0°	型号 :
APPROVAL		VERSION	01		.XX ±0.10	.XX ±0.5°	PJ-3542
					.XXX ±0.05		



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.