
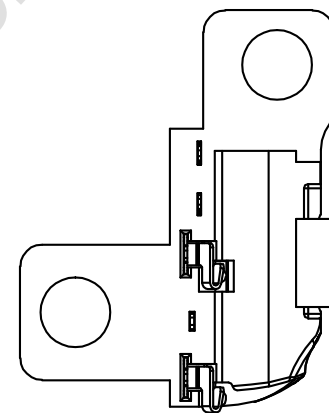

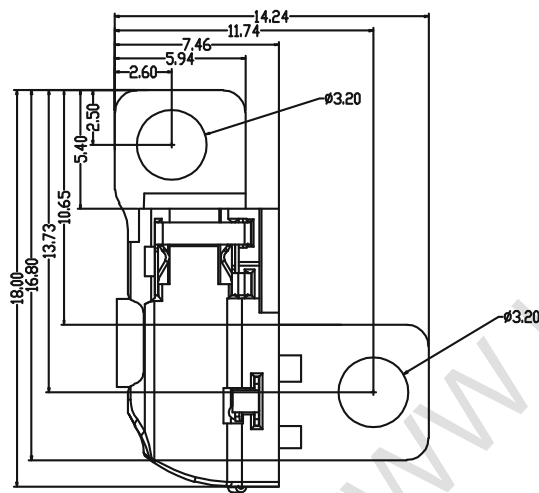




- 备注:
- 1. 材质:
 - 1.1 胶芯: LCP UL94V-0
 - 1.2 端子: 磷铜, 半金镍, 触点, 锡脚镀金1μ".
 - 1.3 端子: SUS, 半金镍, 触点, 锡脚镀金1μ".
 - 2. 主要特性:
 - 2.1 额定电流: 0.5A
 - 2.2 接触电阻: 50mΩ MAX
 - 2.3 绝缘电阻: 100MΩ MIN 100V DC
 - 2.4 耐压测试: 100V AC
 - 2.5 沾锡性: 温度235 ± 5℃, 时间5 ± 0.5s
 - 2.6 单PIN正向应力: 0.035kgf MIN
 - 2.7 使用寿命: 3000次
 - 2.8 耐温性: 烤箱测试: 温度250 ± 5℃, 时间2分钟
 - 2.9 工作环境: 温度: -30℃~+80℃; 湿度: 80% MAX

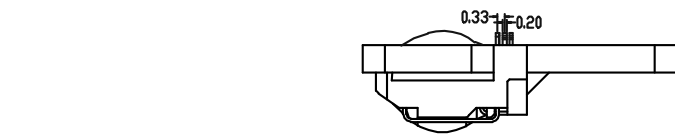

DESIGN	MISS ZENG	SC ALL		TOLERANCE	ANGLES
DRAWIGN	MISS LI	ANIT		.X ±0.25	±1°
CHECK	Mr. ZENG	SIZE		.XX ±0.15	
APPROVAL		VERSION		.XXX ±0.05	

品名: 耳机插座

型号: PJ-001A-5P



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.