

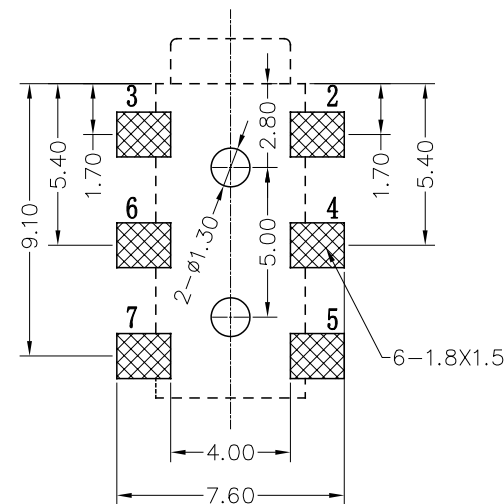
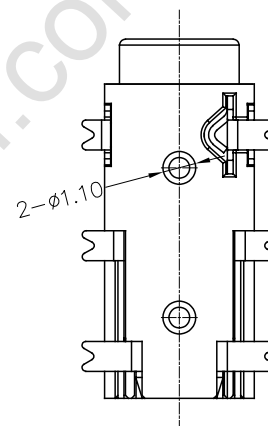
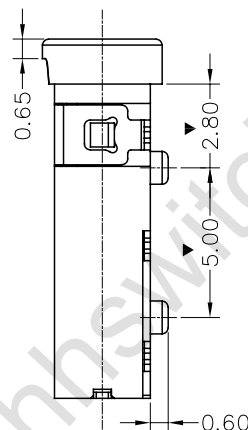
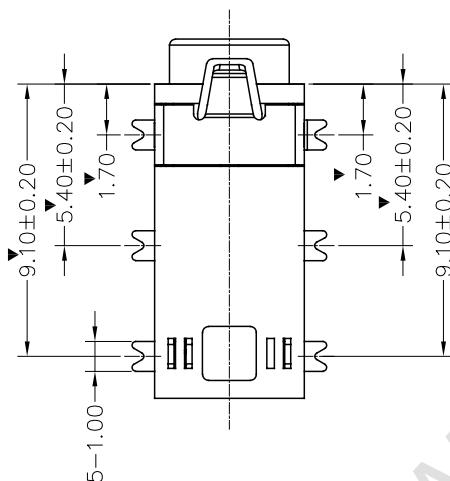
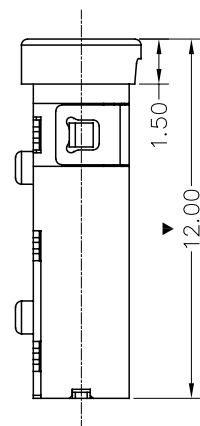
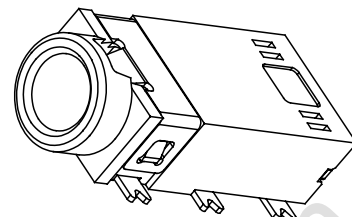
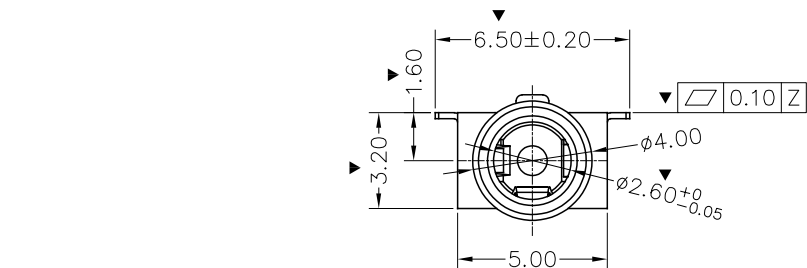
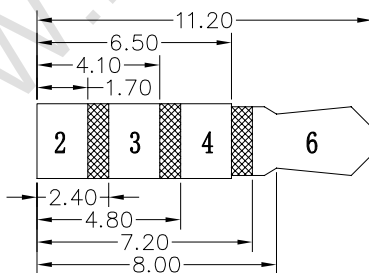




P.C.B LAYOUT TOP VIEW



7	PJ-242-07	4#开关脚	1	磷铜	0.2T	镀金	主要技术性能	
6	PJ-242-06	4# 脚	1	磷铜	0.2T	镀金	额定电负荷	DC 30V\0.5A
5	PJ-242-05	3#开关 脚	1	磷铜	0.2T	镀金	接触电阻	≤0.03 Ω
4	PJ-242-04	3# 脚	1	磷铜	0.2T	镀金	绝缘电阻	≥100MΩ
3	PJ-242-03	2# 脚	1	磷铜	0.2T	镀金	耐 压	AC500V(50Hz)/min
2	PJ-242-02	盖 脚	1	磷铜	0.2T	镀金	插 拔 力	3-30N
1	PJ-242-01	基 座	1	PPA		黑色	使用温度范围	-30-70
序号	产品编号	产品名称	数量	材 料	规 格	处 理	使用寿命	5000次

DESIGN	MISS ZENG	SC ALL			TOLERANCE	ANGLES
DRAWIGN	MISS LI	ANIT	mm		.X ±0.30	.X ±2°
CHECK	Mr. ZENG	SIZE	A4 : 210*297		.X ±0.20	.X ±1°
APPROVAL		VERSION	01		.XX ±0.10	.XX ±0.5°
					.XXX ±0.05	



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.