

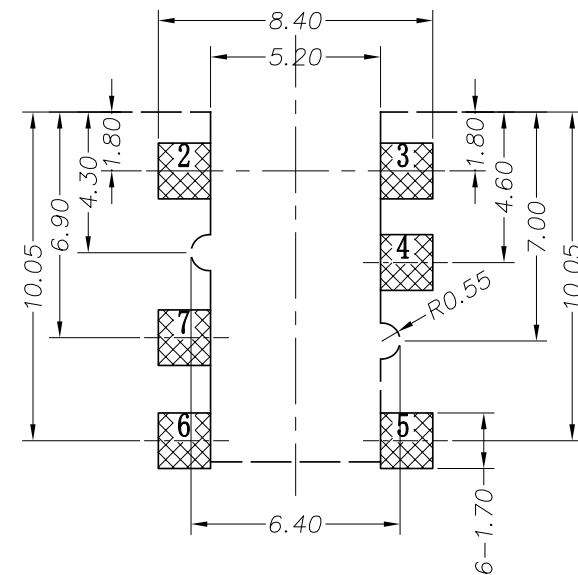
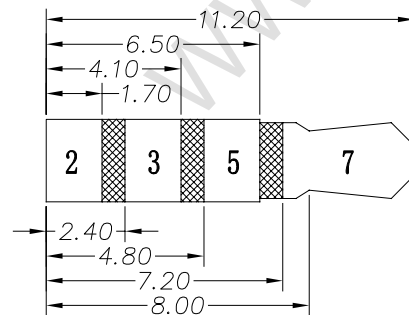


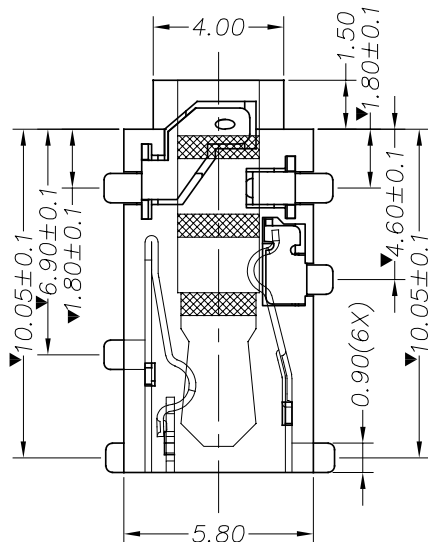
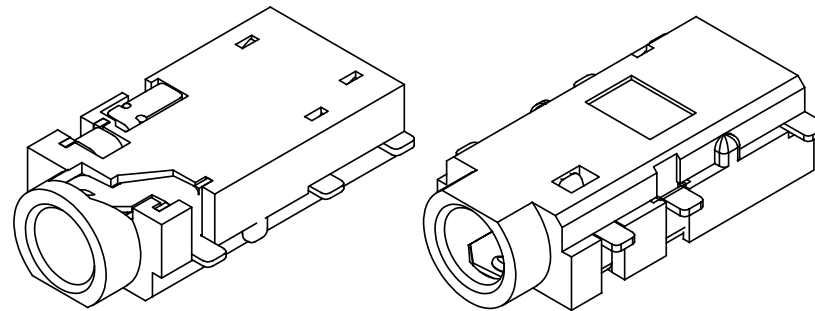
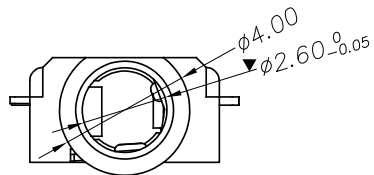




P. C. B LAYOUT TOP VIEW

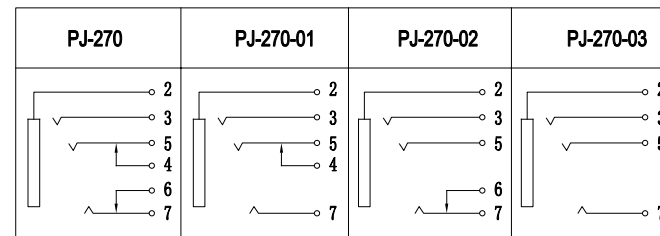

7	PJ-270-07	弹片脚	1	镀青铜	0.2T	镀金	主要技术性能	
6	PJ-270-06	插脚	1	磷铜	0.25T	镀金	额定电负荷	DC 30V 10.5A
5	PJ-270-05	3#脚	1	镀青铜	0.2T	镀金	接触电阻	$\leq 0.03 \Omega$
4	PJ-270-04	3#开关脚	1	磷铜	0.25T	镀金	绝缘电阻	$\geq 100M\Omega$
3	PJ-270-03	2#脚	1	磷铜	0.25T	镀金	耐压	AC500V(50Hz)/min
2	PJ-270-02	盖脚	1	磷铜	0.2T	镀金	插拔力	3-20N
1	PJ-270-01	底座	1	PPA		黑色	使用温度范围	-30-70
序号	产品编号	产品名称	数量	材料	规格	处理	使用寿命	5000次

DESIGN	MISS ZENG	SC ALL			TOLERANCE	ANGLES	品名:
DRAWIGN	MISS LI	ANIT	mm		X. ± 0.20	X. $\pm 2^\circ$	耳机插座
CHECK	Mr. ZENG	SIZE	A4 : 210*297		.X ± 0.10	.X $\pm 1^\circ$	型号:
APPROVAL		VERSION	01		.XX ± 0.05	.XX $\pm 0.5^\circ$	PJ-270
					.XXX ± 0.02		



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.