

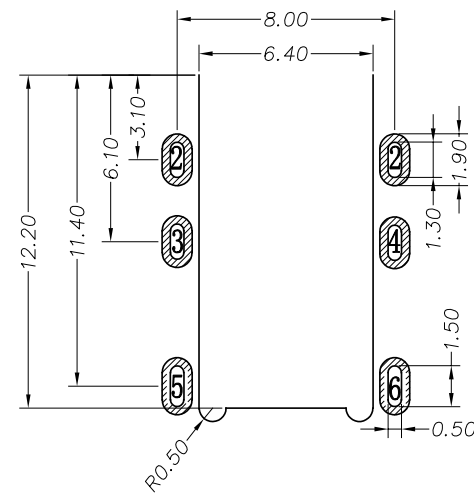

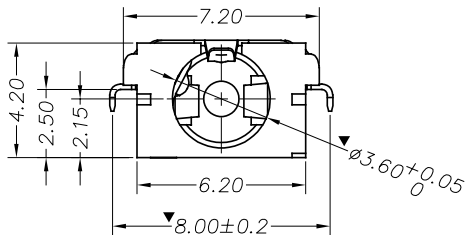


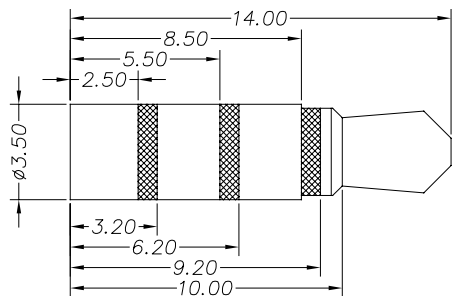
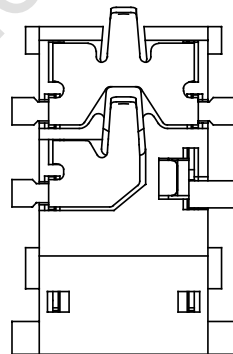
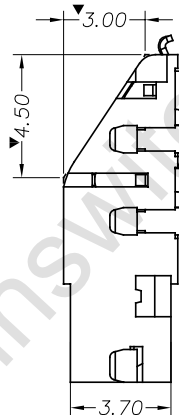


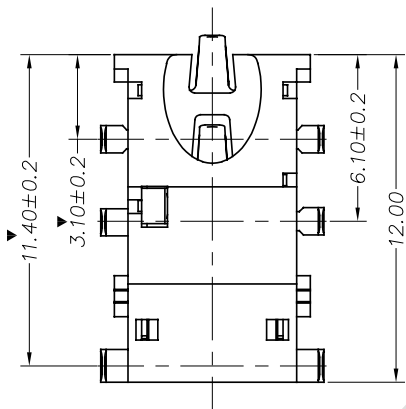

P.C.B LAYOUT TOP VIEW

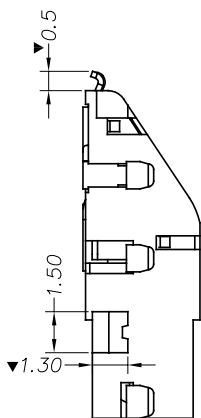

							主要技术性能	
6	PJ-3241-06	右弹片脚	1	磷铜	0.20T	镀金	额定电负荷	DC 30V/0.5A
5	PJ-3241-05	左弹片脚	1	磷铜	0.20T	镀金	接触电阻	≤0.03 Ω
4	PJ-3241-04	中脚	1	磷铜	0.20T	镀金	绝缘电阻	≥100MΩ
3	PJ-3241-03	小盖脚	1	磷铜	0.20T	镀金	耐压	AC500V(50Hz)/min
2	PJ-3241-02	盖脚	1	磷铜	0.20T	镀金	插拔力	3-30N
1	PJ-3241-01	底座	1	PPA		黑色	使用温度范围	-30-70
序号	产品编号	产品名称	数量	材料	规格	处理	使用寿命	5000次

DESIGN	MISS ZENG	SC ALL		TOLERANCE	ANGLES	品名:
DRAWIGN	MISS LI	ANIT		X. ±0.30	X. ±2°	耳机插座
CHECK	Mr. ZENG	SIZE		.X ±0.20	.X ±1°	型号:
APPROVAL		VERSION		.XX ±0.10	.XX ±0.5°	PJ-3241-6P
				.XXX ±0.05		



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.