

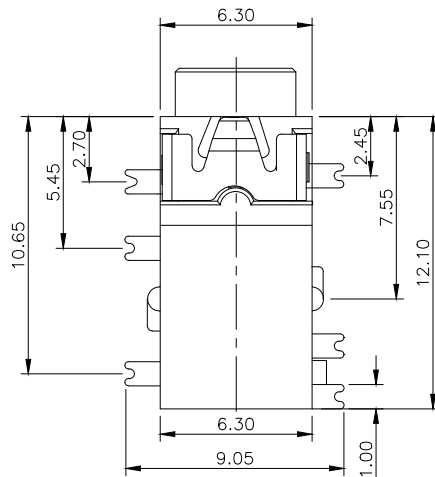
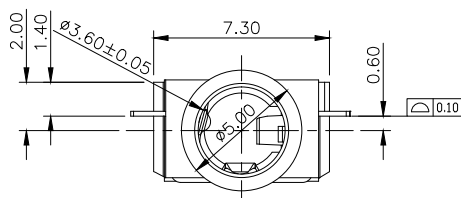
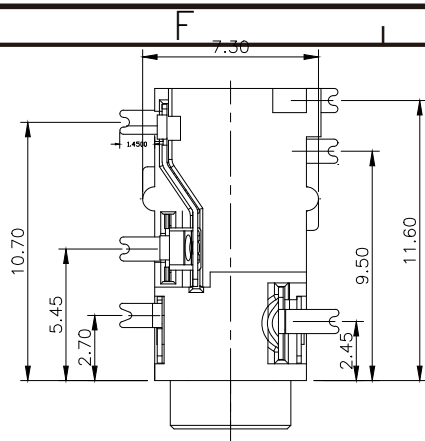


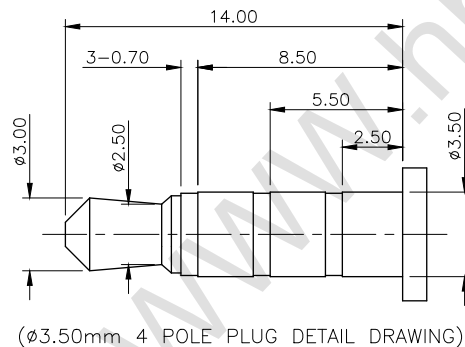

3D VIEW

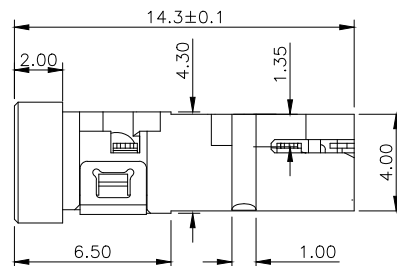


(ø3.50mm 4 POLE PLUG DETAIL DRAWING)


NOTES:

1. REQUEST OF THE SPECIFICATION:


- 1.1 CONTACT CURRENT RATING: 1A;
- 1.2 CONTACT RESISTANCE: 100 mΩ MAX.;
- 1.3 INSULATION RESISTANCE: 100MΩ MIN.;
- 1.4 DIELECTRIC WITHSTANDING: 500V AC MIN.;
- 1.5 DURABILITY: 5,000 CYCLES MIN.;
- 1.6 CONNECTOR MATING FORCES: 29.8N (3.00Kgf) MAX.;
- 1.7 CONNECTOR UNMATING FORCES: 2.98N(0.30Kgf) MIN.;

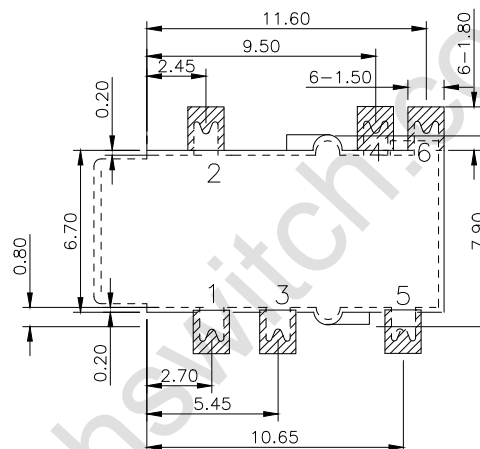

正贴 P.C.B LAYOUT TOP VIEW

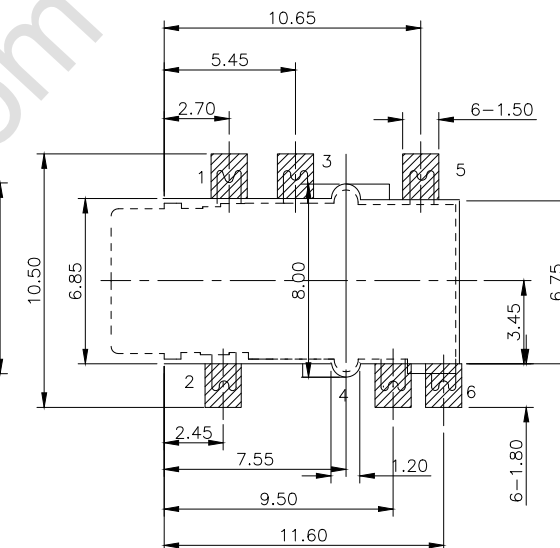

P.C.B LAYOUT TOP VIEW 反贴



SCHEMATIC

8	BUSHING	1	BRASS/NICKEL(40u"MIN.) PLATING OVERALL	
7	TERMINAL 6#	1	磷铜	T=0.20
6	TERMINAL 5#	1	磷铜	T=0.20
5	TERMINAL 4#	1	磷铜	T=0.20
4	TERMINAL 3#	1	镀青铜	T=0.20
3	TERMINAL 2#	1	镀青铜	T=0.20
2	TERMINAL 1#	1	磷铜	T=0.20
1	HOUSING	1	PPA COLOR BLACK	
ITEM	NAME	Q'TY	DESCRIPTION	NOTE

DESIGN	MISS ZENG	SC ALL			TOLERANCE	ANGLES	品名:
DRAWIGN	MISS LI	ANIT	mm		.X. ±0.35	.X. ±2°	耳机插座
CHECK	Mr. ZENG	SIZE	A4 : 210*297		.X ±0.30	.X ±1°	型号:
APPROVAL		VERSION	01		.XX ±0.20		PJ-342铜头
					.XXX ±0.10		



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.