

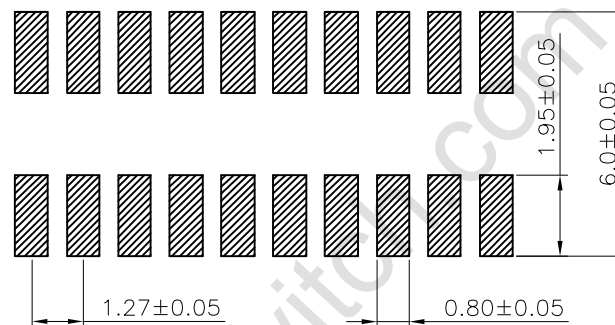
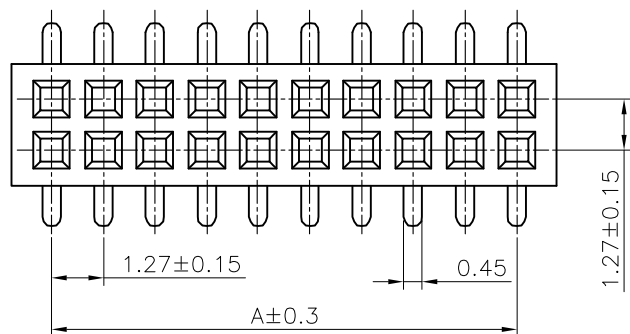




Recommended P.C.Board Layout

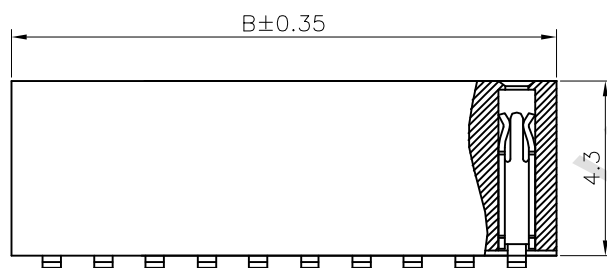

◆SPECIFICATIONS

Current rating: 1A AC, DC

Voltage rating: 250V AC,DC

Temperature range: -25°C ~ +85°C

Insulation resistance: 1000MΩ Min.

Withstanding voltage: 500V AC/ minute.

Contact resistance: 20mΩ Max.

Material:

Insulator: PA6T UL 94V-0

Contact: Brass

Plating: Gold flash plated

$$A=1.27 \times (\text{Circuit}-1)$$

$$B=A+1.70$$

Available in 4 through 100 circuits



DESIGN	MISS ZENG	SC ALL		
DRAWIGN	MISS LI	ANIT	mm	
CHECK	Mr. ZENG	SIZE	A4 : 210*297	
APPROVAL		VERSION	01	

TOLERANCE	ANGLES
X.X ±0.30	±1°
X.XX ±0.20	
X.XXX ±0.10	

品名：板对板连接器
型号：1.27间距-双排-SMT/DIP



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.


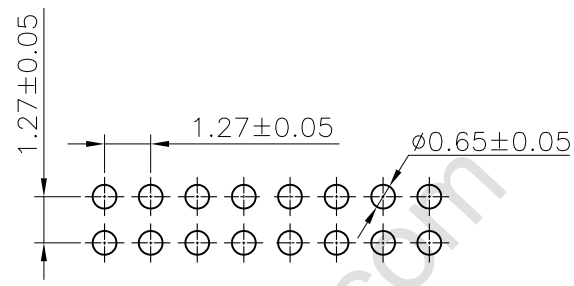
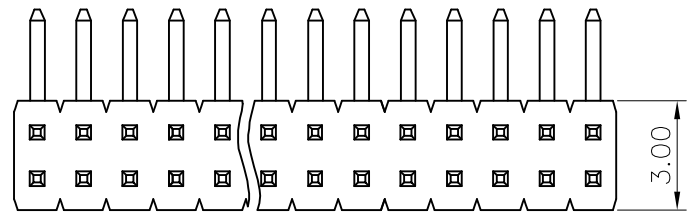


Recommended P.C.Board Layout

◆SPECIFICATIONS
Current rating: 1A AC, DC
Voltage rating: 250V AC,DC
Temperature range: -25°C ~ +85°C
Insulation resistance: 1000MΩ Min.
Withstanding voltage: 500V AC/ minute.
Contact resistance: 20m Ω Max.

Material:
Insulator: Thermoplastic plastics,UL 94V-0
Contact: Brass
Plating: Gold flash plated
Circuits: 2x2~2x50

A=1.27x(Circuits-1)
B=A+1.27
Available in 4 through 100 circuits

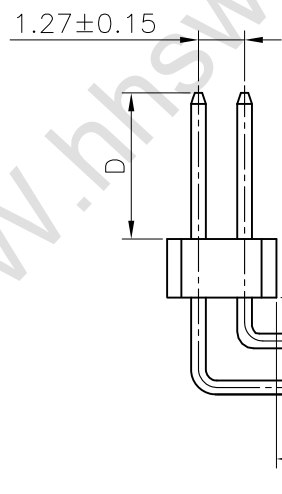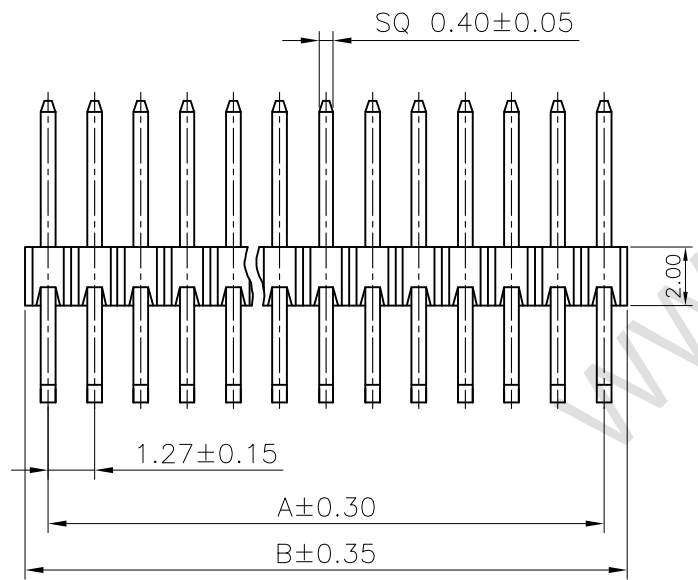

DESIGN	MISS ZENG	SC ALL			TOLERANCE	ANGLES
DRAWIGN	MISS LI	ANIT	mm		X.X ± 0.30	± 1°
CHECK	Mr. ZENG	SIZE	A4 : 210*297		X.XX ± 0.20	
APPROVAL		VERSION	01		X.XXX ± 0.10	

品名：板对板连接器
型号：1.27间距-双排-SMT/DIP



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.