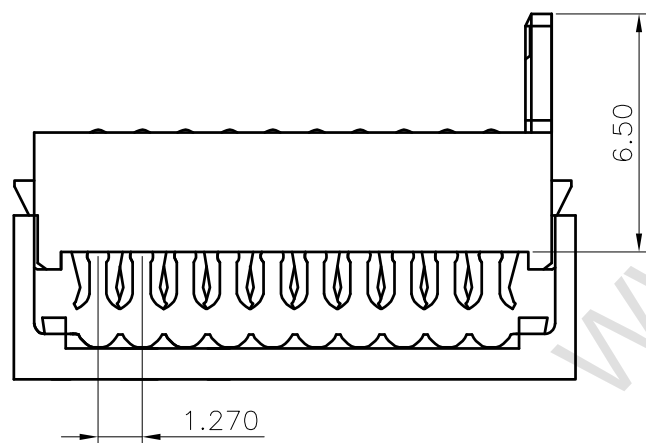
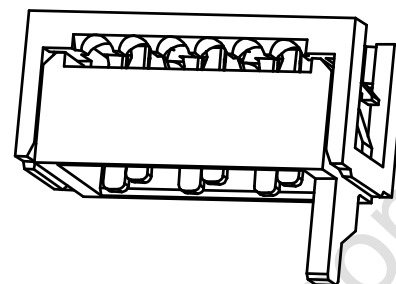
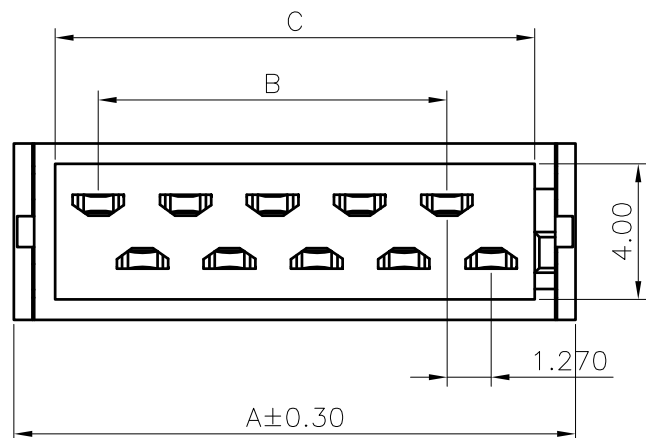


◆ SPECIFICATIONS

- Current rating: 1A AC, DC
- Voltage rating: 500V AC, DC
- Temperature range: -25°C ~ +85°C
- Insulation resistance: 1000MΩ Min.
- Withstanding voltage: 500V AC/ minute.
- Contact resistance: 20mΩ Max.

Material:

Insulator: PBT UL 94V-0


Contact: Brass

Plating: Tin plated over Nickel

Circuits: 2*2~2*13

Mates With 1273 Series Male Wafer

Circuits	Dimension			Q'TY/ Tube
	A	B	C	
04	8.45	2.54	5.85	68
06	10.99	5.08	8.39	52
08	13.33	7.62	10.93	42
10	16.07	10.16	13.47	36
12	18.61	12.70	16.01	31
14	21.15	15.24	18.55	27
16	23.69	17.78	21.09	24
18	26.23	20.32	23.63	22
20	28.77	22.86	26.17	20
22	31.31	25.40	28.71	18
24	33.85	27.94	31.25	17
26	36.39	30.48	33.79	16





DESIGN	MISS ZENG	SC ALL		
DRAWIGN	MISS LI	ANIT	mm	
CHECK	Mr. ZENG	SIZE	A4 : 210*297	
APPROVAL		VERSION	01	

TOLERANCE	ANGLES
X.X ±0.30	±1°
X.XX ±0.20	
X.XXX ±0.10	

品名：刺破式连接器
型号：1.27间距-双排-SMT-刺破式



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.

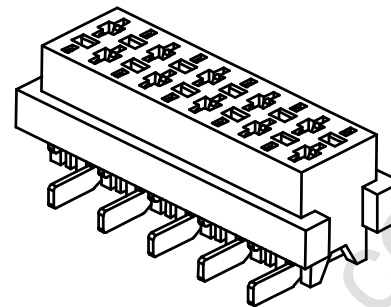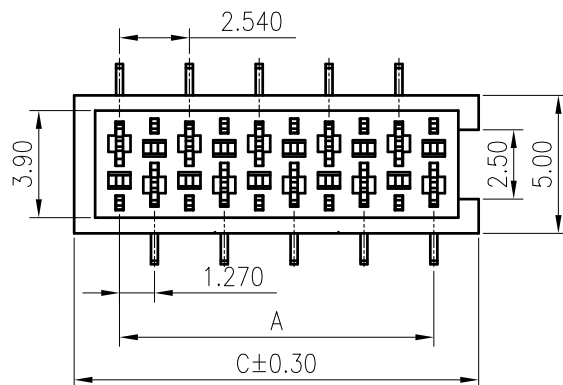

◆SPECIFICATIONS

- Current rating: 1A AC, DC
- Voltage rating: 500V AC,DC
- Temperature range: -25°C ~ +85°C
- Insulation resistance: 1000MΩ Min.
- Withstanding voltage: 500V AC/ minute.
- Contact resistance: 20mΩ Max.

Material:

Insulator: Nylon 6T UL 94V-0




Contact: Phosphor Bronze

Cover: Stainless steel

Plating: Tin plated over Nickel


Circuits: 04~26

Mates With 1273 Series Female IDC Wafer

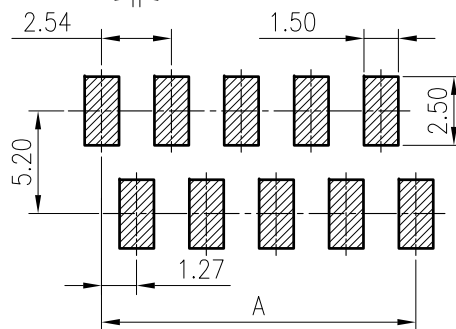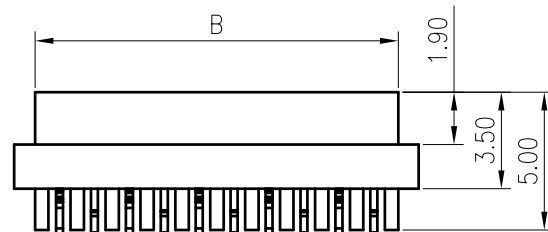

△ Recommended P.C.B Layout(Top Side)
(Board Tolerance±0.05)

Circuits	Dimension			Q'TY/ Tube
	A	B	C	
04	3.81	5.50	6.99	82
06	6.35	8.04	9.53	60
08	8.89	10.58	12.07	48
10	11.43	13.12	14.61	39
12	13.97	15.66	17.15	33
14	16.51	18.20	19.69	29
16	19.05	20.74	22.23	26
18	21.59	23.28	24.77	23
20	24.13	25.82	27.31	21
22	26.67	28.36	29.85	19
24	29.21	30.90	32.39	17
26	31.75	33.54	34.93	16



DESIGN	MISS ZENG	SC ALL		
DRAWIGN	MISS LI	ANIT	mm	
CHECK	Mr. ZENG	SIZE	A4 : 210*297	
APPROVAL		VERSION	01	

TOLERANCE	ANGLES
X.X ±0.30	±1°
X.XX ±0.20	
X.XXX ±0.10	

品名：刺破式连接器
型号：1.27间距-双排-SMT-刺破式



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.