
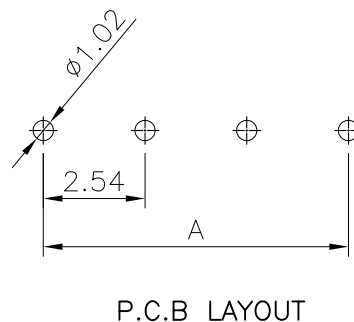
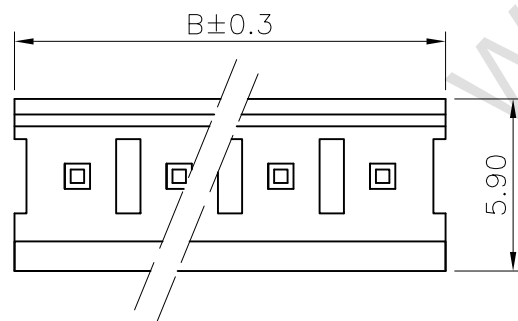
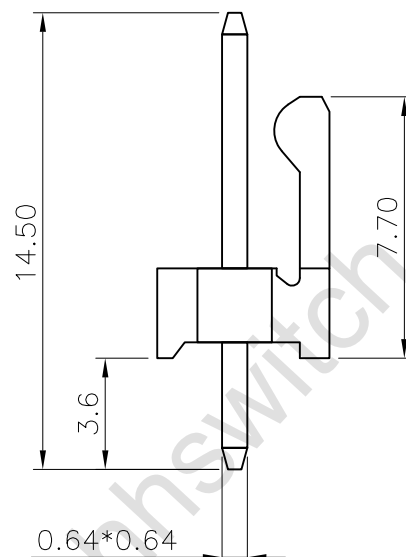


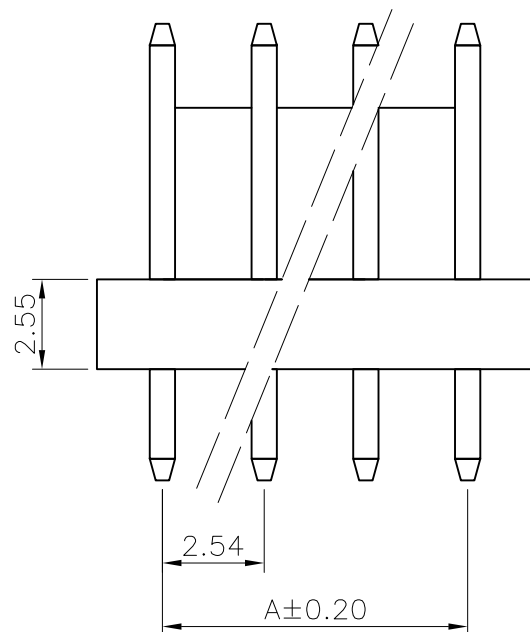

◆ SPECIFICATIONS

- Current rating: 3A AC, DC
- Voltage rating: 250V AC, DC
- Temperature range: -25°C ~ +85°C
- Insulation resistance: 1000MΩ Min.
- Withstanding voltage: 800V AC/ minute.
- Contact resistance: 20mΩ Max.

Material:

Insulator: Nylon 66 UL 94V-0

Contact: Brass

Plating: Tin plated over Nickel

Part No.	Dimension mm	
	A	B
D00219P630	2.54	5.08
D00319P630	5.08	7.62
D00419P630	7.62	10.16
D00519P630	10.16	12.70
D00619P630	12.70	15.24
D00719P630	15.24	17.78
D00819P630	17.78	20.32
D00919P630	20.32	22.86
D01019P630	22.86	25.40
D01119P630	25.40	27.94
D01219P630	27.94	30.48
D01319P630	30.48	33.02
D01419P630	33.02	35.56
D01519P630	35.56	38.10
D01619P630	38.10	40.64





DESIGN	MISS ZENG	SC ALL	
DRAWIGN	MISS LI	ANIT	mm
CHECK	Mr. ZENG	SIZE	A4 : 210*297
APPROVAL		VERSION	01

TOLERANCE	ANGLES
X.X ±0.30	±1°
X.XX ±0.20	
X.XXX ±0.10	

品名：	刺破式连接器
型号：	2.54-单排-DIP-带扣-无角-180°



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.

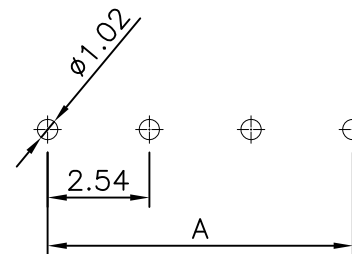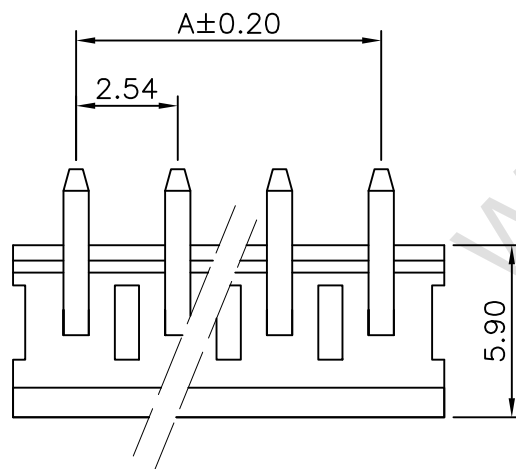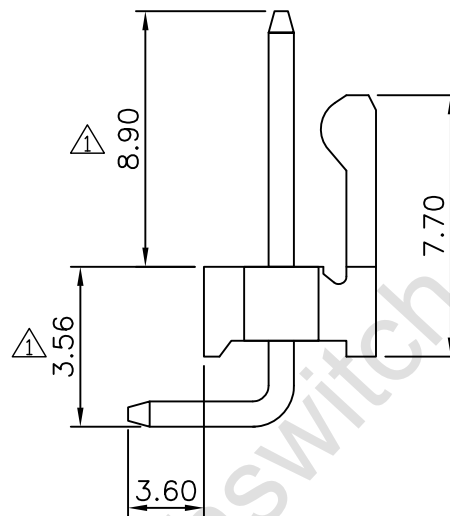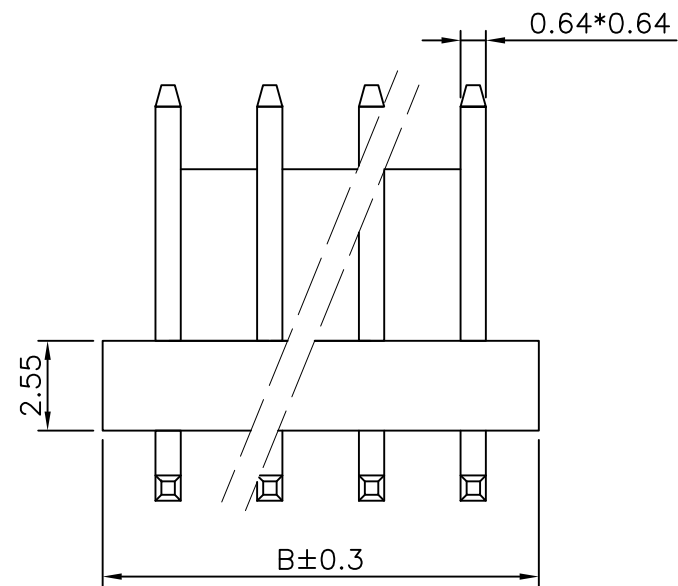

P.C.B LAYOUT

◆ SPECIFICATIONS

- Current rating: 3A AC, DC
- Voltage rating: 250V AC, DC
- Temperature range: -25°C ~ +85°C
- Insulation resistance: 1000MΩ Min.
- Withstanding voltage: 800V AC/ minute.
- Contact resistance: 20mΩ Max.

Material:

Insulator: Nylon 66 UL 94V-0

Contact: Brass

Plating: Tin plated over Nickel

Part No.	Dimension mm	
	A	B
D00219P630	2.54	5.08
D00319P630	5.08	7.62
D00419P630	7.62	10.16
D00519P630	10.16	12.70
D00619P630	12.70	15.24
D00719P630	15.24	17.78
D00819P630	17.78	20.32
D00919P630	20.32	22.86
D01019P630	22.86	25.40
D01119P630	25.40	27.94
D01219P630	27.94	30.48
D01319P630	30.48	33.02
D01419P630	33.02	35.56
D01519P630	35.56	38.10
D01619P630	38.10	40.64




DESIGN	MISS ZENG	SC ALL	
DRAWIGN	MISS LI	ANIT	mm
CHECK	Mr. ZENG	SIZE	A4 : 210*297
APPROVAL		VERSION	01

TOLERANCE	ANGLES
X.X ±0.30	±1°
X.XX ±0.20	
X.XXX ±0.10	



品名：刺破式连接器
型号：2.54-单排-DIP-带扣-无角-180°



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.

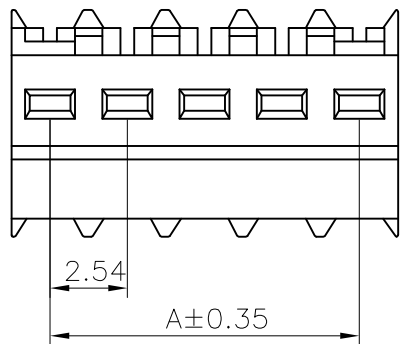

color	Wire size
red	22#
white	24#
natura	24#
black	24#
blue	26#
green	26#

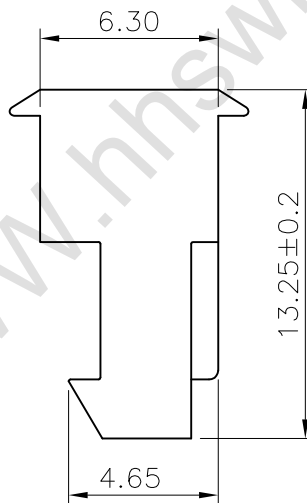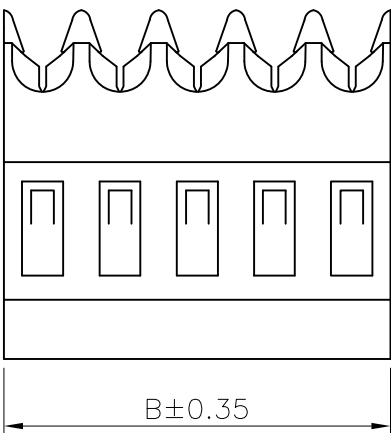

◆ SPECIFICATIONS

- Current rating: 3A AC, DC
- Voltage rating: 250V AC, DC
- Temperature range: -25°C ~ +85°C
- Insulation resistance: 1000MΩ Min.
- Withstanding voltage: 800V AC/ minute.
- Contact resistance: 20mΩ Max.

Material:

Insulator: Nylon 66 UL 94V-0

Contact: Brass

Plating: Tin plated over Nickel

PART No.	Dimension mm	
	A	B
2540021*P6V	2.54	5.08
2540031*P6V	5.08	7.62
2540041*P6V	7.62	10.16
2540051*P6V	10.16	12.70
2540061*P6V	12.70	15.24
2540071*P6V	15.24	17.78
2540081*P6V	17.78	20.32
2540091*P6V	20.32	22.86
2540101*P6V	22.86	25.40
2540111*P6V	25.40	27.94
2540121*P6V	27.94	30.48
2540131*P6V	30.48	33.02
2540141*P6V	33.02	35.56
2540151*P6V	35.56	38.10
2540161*P6V	38.10	40.64
2540171*P6V	40.64	43.18



DESIGN	MISS ZENG	SC ALL			TOLERANCE	ANGLES
DRAWIGN	MISS LI	ANIT	mm		X.X ±0.30	±1°
CHECK	Mr. ZENG	SIZE	A4 : 210*297		X.XX ±0.20	
APPROVAL		VERSION	01		X.XXX ±0.10	

品名：

刺破式连接器

型号：

2.54-单排-DIP-带扣-无角-180°



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.