
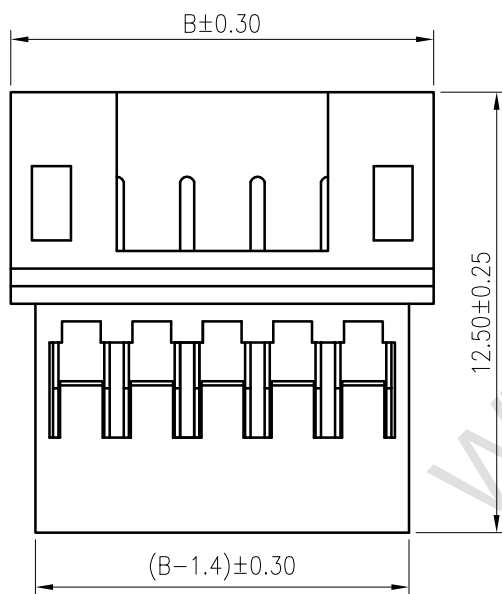
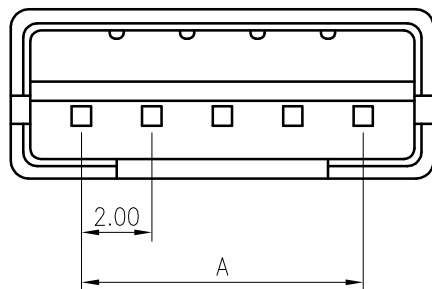


SPECIFICATIONS

1. Current rating: 2A AC, DC
2. Voltage rating: 100V AC, DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000M Ω / min.
5. Withstanding voltage: 800V AC/ minute.
6. Contact resistance: 20m Ω / max.

Material: PA66 UL94 V-0
Suitable 2015 series terminal
Mate with 2001 series housing



Circuits	Dimensions		Circuits	Dimensions	
	A	B		A	B
2	2.00	6.00	10	18.00	22.00
3	4.00	8.00	11	20.00	24.00
4	6.00	10.00	12	22.00	26.00
5	8.00	12.00	13	24.00	28.00
6	10.00	14.00	14	26.00	30.00
7	12.00	16.00	15	28.00	32.00
8	14.00	18.00	16	30.00	34.00
9	16.00	20.00			


DESIGN	MISS ZENG	SC ALL			TOLERANCE	ANGLES
DRAWIGN	MISS LI	ANIT	mm		X.X ± 0.30	$\pm 1^\circ$
CHECK	Mr. ZENG	SIZE	A4 : 210*297		X.XX ± 0.20	
APPROVAL		VERSION	01		X.XXX ± 0.10	

品名：线对线连接器

型号：2.0间距-单排



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.

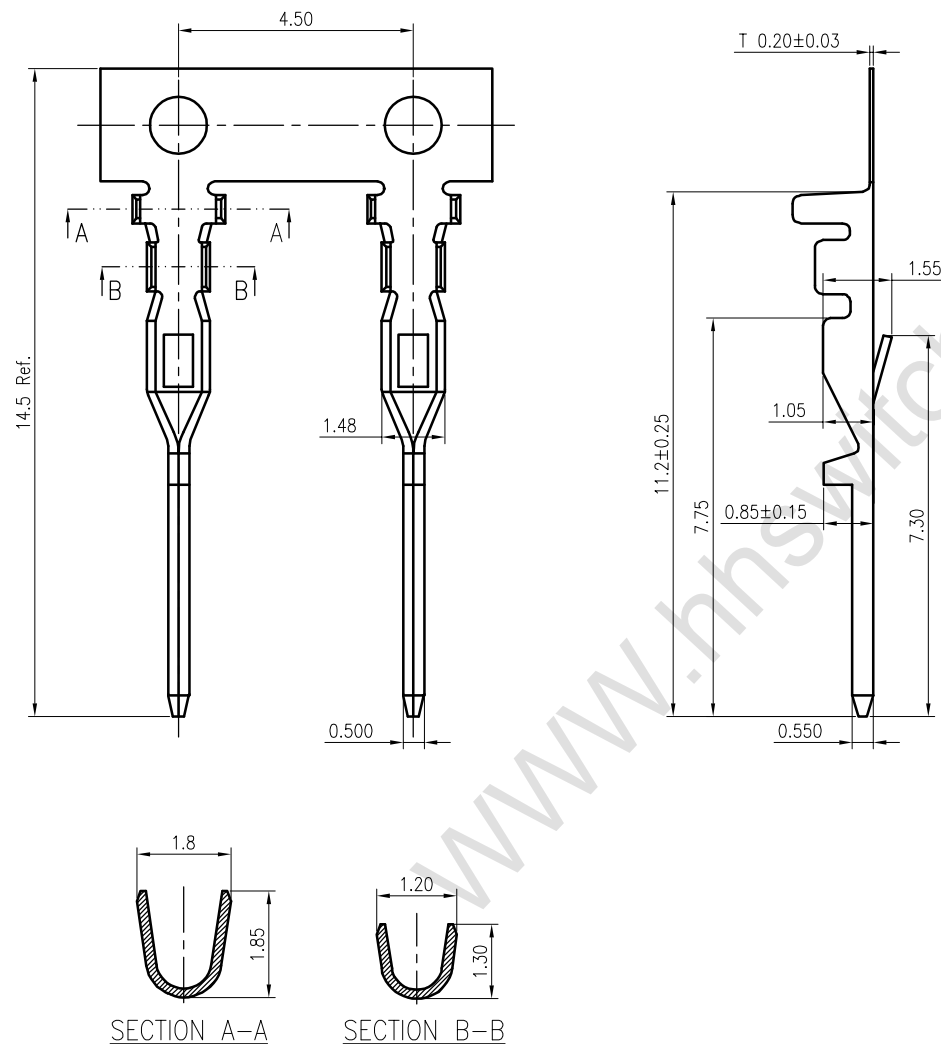

SPECIFICATIONS

1. Current rating: 2A AC, DC
2. Voltage rating: 100V AC,DC
3. Temperature range: -25°C ~ +85°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 800V AC/ minute.
6. Contact resistance: 20mΩ Max.

Material: Phosphor Bronze

Plating: Tin-plated over nickel

Applicable wires:

AWG #28~#24

Insulation O.D.: 1.5mm Max.

Suitable 2015 series housing

Mate with 2001 series terminal

Qty/reel:10,000PCS



DESIGN	MISS ZENG	SC ALL			TOLERANCE	ANGLES
DRAWIGN	MISS LI	ANIT	mm		X.X ±0.30	±1°
CHECK	Mr. ZENG	SIZE	A4 : 210*297		X.XX ±0.20	
APPROVAL		VERSION	01		X.XXX ±0.10	

品名：	线对线连接器
型号：	2.0间距-单排



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.