

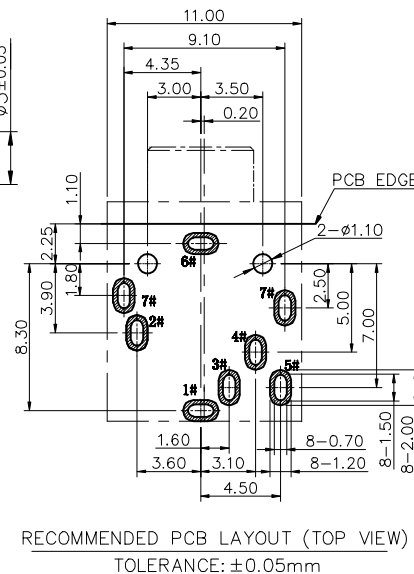
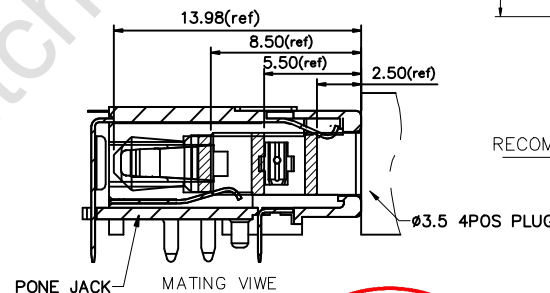
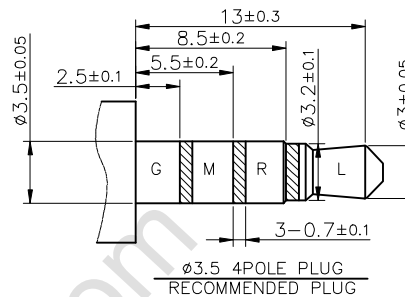
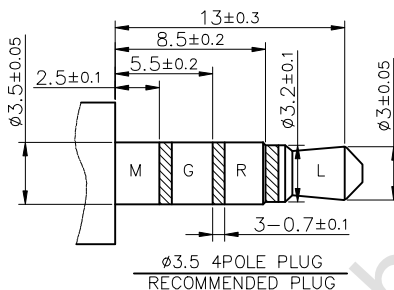


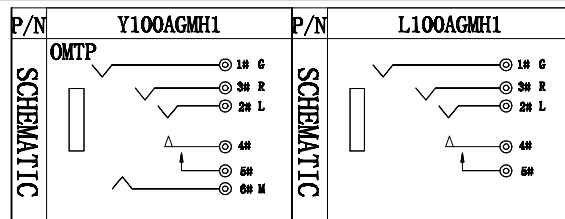
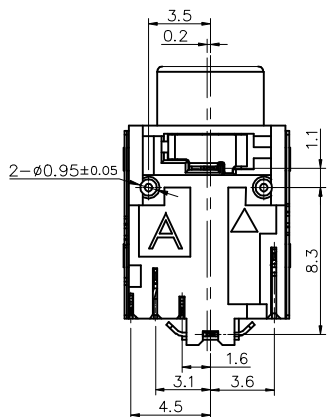
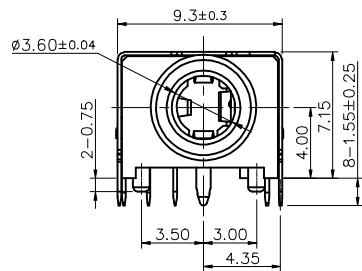
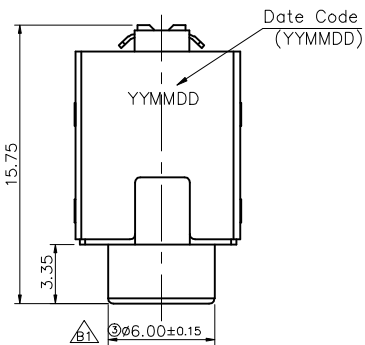


Specification:

1. Rating : DC 12V 1A.
2. Contact resistance: $\leq 50m\Omega$ (INITIAL).
3. Insulation resistance: $\geq 100M\Omega$ (500VDC).
After life test: $\geq 50M\Omega$.
4. Withstand voltage: 500V/AC.
5. Insertion and extraction force: 3N~30N.
6. life test: 5000cycles min.
7. Operation temperature range: $-20^{\circ}C \sim 70^{\circ}C$.
8. Preservative temperature range: $-40^{\circ}C \sim 85^{\circ}C$.

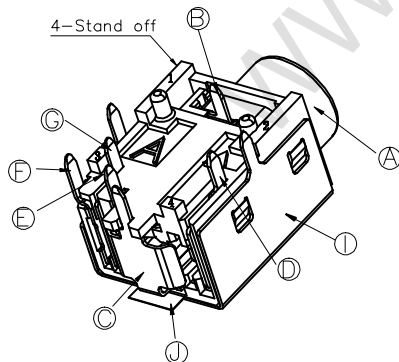

NO.	DESCRIPTION	QTY	MATERIAL	REMARK
1	Shielding	1	Stainless steel t0.20	Ni 50u"
2	Separator	1	PA10T	BLACK
3	Transfer	1	C5210R-H t=0.20	GOLD FLASH ON OVER ALL Ni 50u" MIN OVER ALL BASE
4	Make terminal	1	C5210R-H t=0.20	
5	Ring B	1	C5210R-EH t=0.20	
6	Tip spring	1	C5210R-EH t=0.25	
7	Earth-A	1	C5210R-EH t=0.20	BLACK
8	Ring A	1	C5210R-EH t=0.20	
9	Housing	1	PA10T	BLACK

DESIGN	MISS ZENG	SC ALL		TOLERANCE	ANGLES
DRAWIGN	MISS LI	ANIT	mm	X. ± 0.30	X ± 5
CHECK	Mr. ZENG	SIZE	A4 : 210*297	.X ± 0.20	.X ± 3
APPROVAL		VERSION	01	.XX ± 0.10	.XXX ± 2
				.XXX ± 0.05	

品名:	耳机插座
型号:	PJ-326C9



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.