
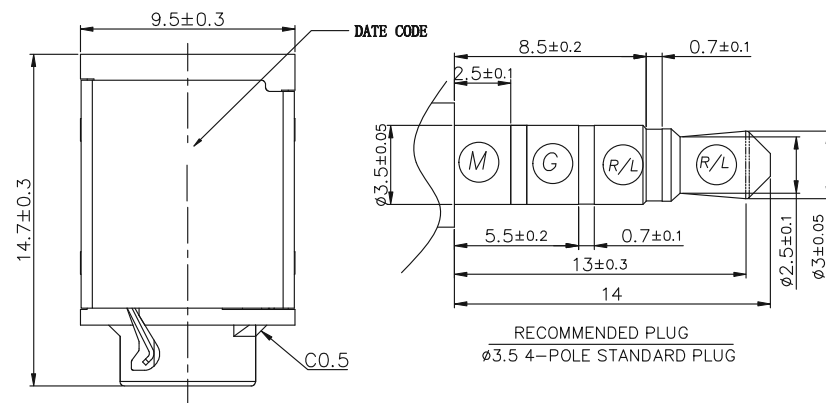



Specification:

1. Rating : DC 30V 0.5A;
2. Contact resistance: $\leq 50\text{m}\Omega$;
After test: $\leq 100\text{m}\Omega$
3. Insulation resistance: $\geq 100\text{M}\Omega$ (500VDC);
After test: $\geq 50\text{M}\Omega$
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3N~30N;
6. life test: 5000cycles ;
7. Operation temperature range: $-20^{\circ}\text{C}\sim 70^{\circ}\text{C}$
8. Preservative temperature range: $-40^{\circ}\text{C}\sim 85^{\circ}\text{C}$

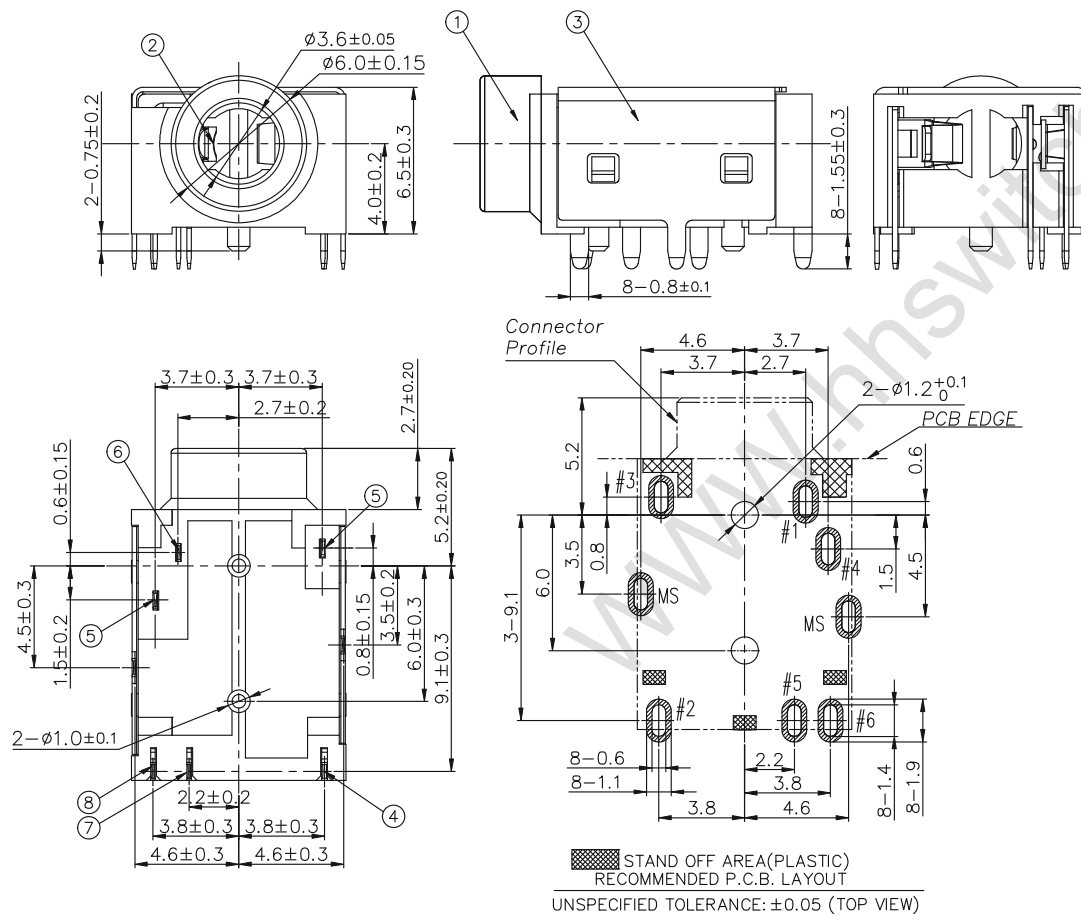

②	Mar 1		1	_____	_____	
⑧	Make spring	6	1	Copper Alloy	20u"Ag ,50u"	
⑦	Transfer spring	5	1	Copper Alloy	Ni Plating	
⑥	Earth spring	1	1	Copper Alloy		
⑤	Ring spring	3	4	2	Copper Alloy	See "Ordering info"
④	Tip spring	2	1	Copper Alloy		
③	Shell		1	Copper Alloy	Ni Plating	
②	Separate		1	High-Temp Thermoplastic (Halogen Free)	BLACK	
①	Housing		1	High-Temp Thermoplastic (Halogen Free)	BLACK	
NO.	DESCRIPTION	Q' TY		MATERIAL	REMARK	

DESIGN	MISS ZENG	SC ALL			TOLERANCE	ANGLES	品名： 耳机插座
DRAWIGN	MISS LI	ANIT	mm		X.X ±0.30	X.X ±5	
CHECK	Mr. ZENG	SIZE	A4：210*297		X.XX ±0.20	X.XX ±2	型号： PJ-3317L
APPROVAL		VERSION	01		X.XXX ±0.10	X.XXX ±1	



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.