
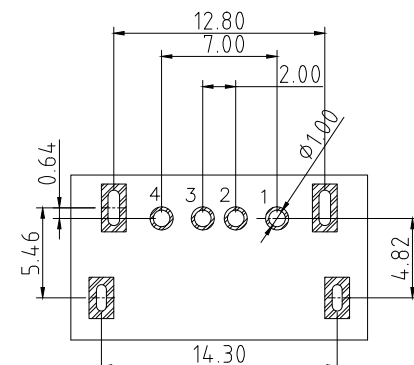
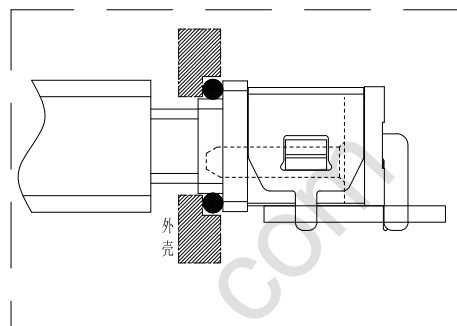
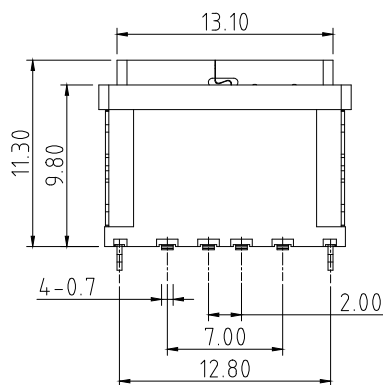
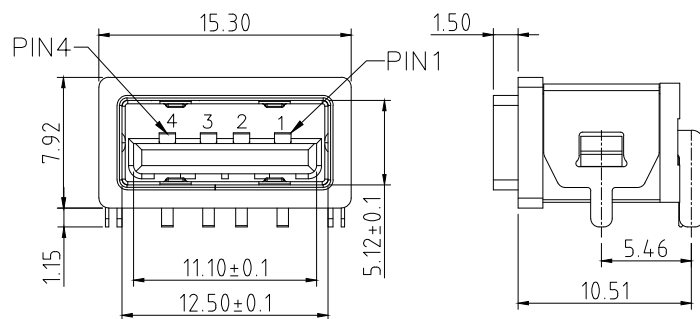


F E D C B A



RECOMMENDED PCB LAYOUT(TOP VIEW)
DEFAULT TOLERANCE ± 0.05
THICKNESS T=1.6mm

PIN ASSIGNMENT

PIN NO.	1	2	3	4
SIGNAL NAME	VBUS	D-	D+	GND

NOTES:

SPECIFICATION:

- CURRENT RATING: 3.0A MAX
 - DIELECTRIC WITHSTAND VOLTAGE: 100VAC
 - TEMPERATURE RANGE: $-30^{\circ}\text{C} \sim 85^{\circ}\text{C}$
 - CONTACT RESISTANCE: 40 MILLIONHM MAX
- INSULATION RESISTANCE: 100 MEGOHMS MIN.
INSERTION FORCE :8N~35N
UNMATING FORCE: 8N~35N
DURABILITY:1500 CYCLES

注: 防水圈是圆形截面, 直径为1.0mm, 硅胶圈, 防水圈挤压力, 由1.0mm挤压力
0.4mm ~ 0.5mm, 防水效果好

⑥	Shell	1	Stainless steel	NI PLATING;	T=0.20mm
⑤	Shell	1	Stainless steel	NI PLATING;	T=0.25mm
④	MID PLATE	1	Stainless steel		T=0.15mm
③	Terminal-B	8	铜镍硅合金	Au:3u" PLATING;	T=0.15mm
②	Terminal-A	8		Au:3u" PLATING;	T=0.15mm
①	Housing	1	HIGH TEMP	Black	
NO.	PART NAME	QTY	MATERIAL	DESCRIPTION	REMARK

DESIGN	MISS ZENG	SC ALL			TOLERANCE	ANGLES	品名: TYPE-C 型号: TYPE-C 4P 2.0 板上型
DRAWIGN	MISS LI	ANIT	mm		X. ± 0.50	X. ± 2	
CHECK	Mr. ZENG	SIZE	A4 : 210*297		.X ± 0.30	.X ± 1	
APPROVAL		VERSION	01		.XX ± 0.10	.XX ± 0.5	
					.XXX ± 0.05		



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.