

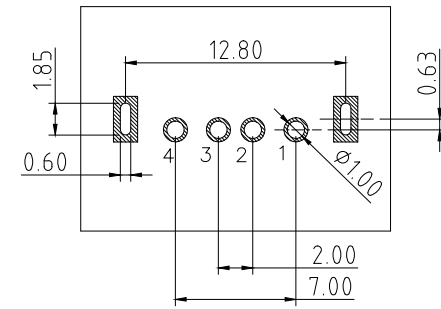
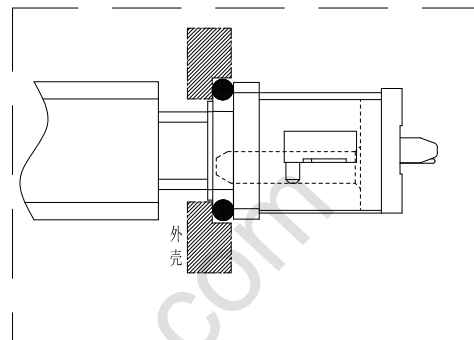


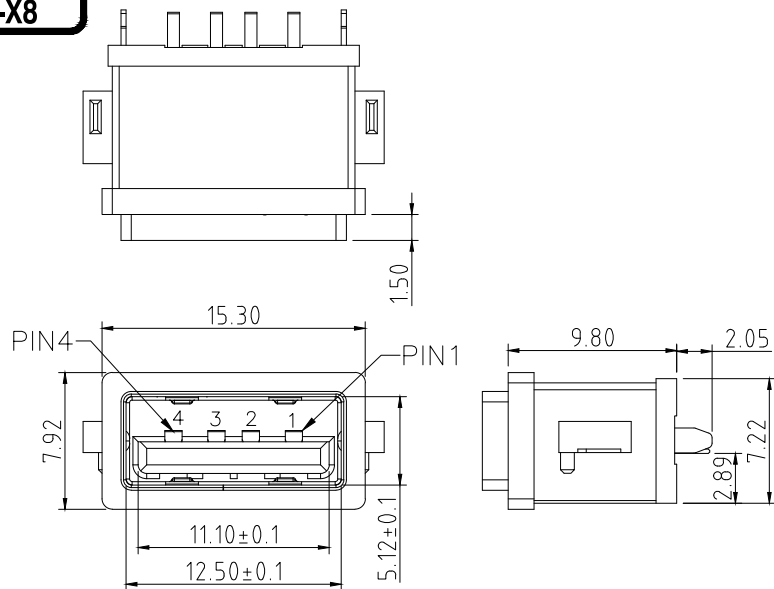

RECOMMENDED PCB LAYOUT(TOP VIEW)
DEFAULT TOLERANCE+/-0.05
THICKNESS T=1.6mm

PIN ASSIGNMENT

PIN NO.	1	2	3	4
SINGAL NAME	VBUS	D-	D+	GND

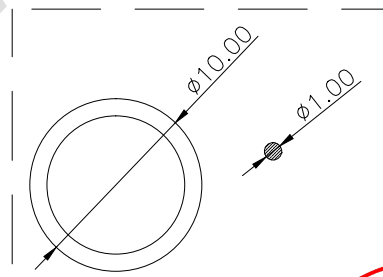

注: 防水圈是圆形截面, 直径为1.0mm的
硅胶圈, 防水圈挤压力, 由1.0mm挤压力到
0.4mm ~ 0.5mm, 防水效果好

NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE :8N~35N
7. UNMATING FORCE: 8N~35N
8. DURABILITY:1500 CYCLES

3	Shell	1	SUS 301 1/4H	
3	PLASTIC Shell	1	PA9T&LCP (G.F30%)	
2	Contact	4	BRASS C2680-EH Au/Ni Plating T=0.25mm	
1	Housing	1	PA10T (G.F30%)	
ITEM	PART NAME	Q'TY	FINISH	NOTE

DESIGN	MISS ZENG	SC ALL			TOLERANCE	ANGLES	品名 : TYPE-C 型号 : TYPE-C 4P 立式直插
DRAWIGN	MISS LI	ANIT	mm		.X. ±0.50	.X. ±2	
CHECK	Mr. ZENG	SIZE	A4 : 210*297		.X ±0.30	.X ±1	
APPROVAL		VERSION	01		.XX ±0.10	.XX ±0.5	
					.XXX ±0.05		



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.