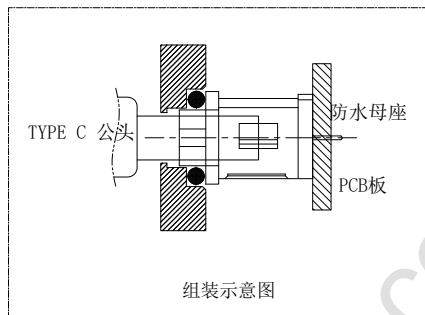
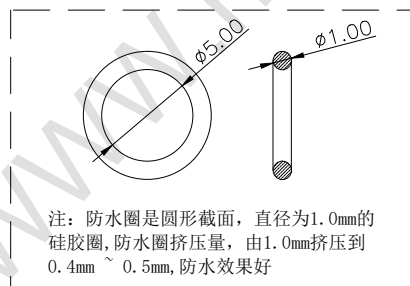


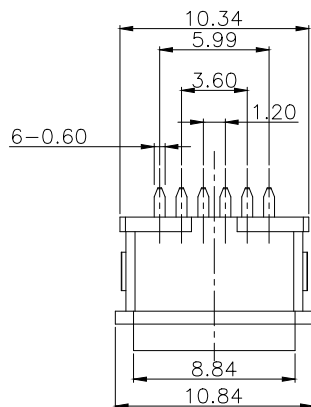


RECOMMENDED PCB LAYOUT(TOP VIEW)

THICKNESS T=1.0mm
DEFAULT TOLERANCE+/-0.05

NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
UNMATING FORCE: 8N~20N
DURABILITY:5000 CYCLES

				4	Shell1	1	SUS301 Ni Plating T=0.25mm	Ni:40~160u"; Au:CONTACT AREA:3u" OTHER AREA:G/F
				3	Housing2	1	LCP(G.F30%)	
A5	CC1	B12	GND	2	Contact	5	Phosphor bronze C5210R-EH Au/Ni Plating T=0.20mm	
A9	VBUS	B9	VBUS					
A12	GND	B5	CC2	1	Housing	1	PA9T (G.F30%)	
PIN	SIGNAL NAME	PIN	SIGNAL NAME	ITEM	PART NAME	Q' TY	FINISH	NOTE

DESIGN	MISS ZENG	SC ALL	
DRAWIGN	MISS LI	ANIT	mm
CHECK	Mr. ZENG	SIZE	A4 : 210*297
APPROVAL		VERSION	01

	TOLERANCE	ANGLES
	.X. ±0.50	.X. ±2
	.X ±0.30	.X ±1
	.XX ±0.10	.XX ±0.5
	.XXX ±0.05	

品名:	TYPE-C
型号:	TYPE-C 6P 立式直插



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.