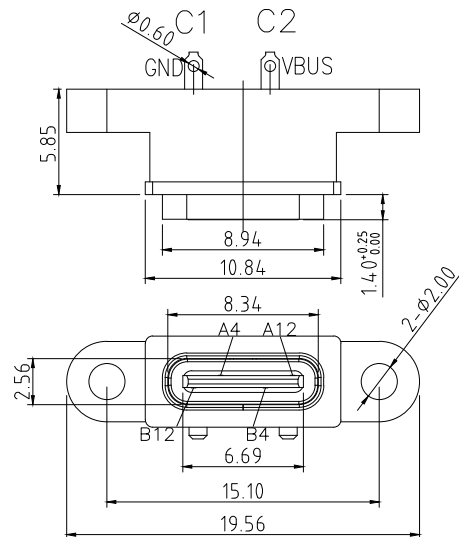
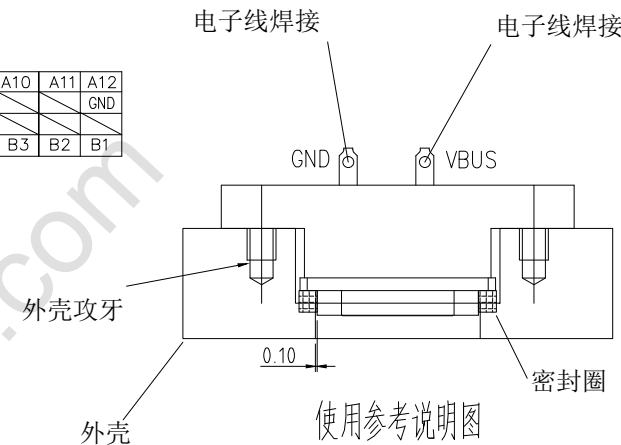


INTERFACE(FRONT VIEW)



A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND			VBUS								GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

PIN ASSIGNMENT

PIN NO.	A12&B12	A4&B4
SIGNAL NAME	GND	VBUS
PCB PAD NO.	C1	C2

NOTES:
SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY:5000 CYCLES

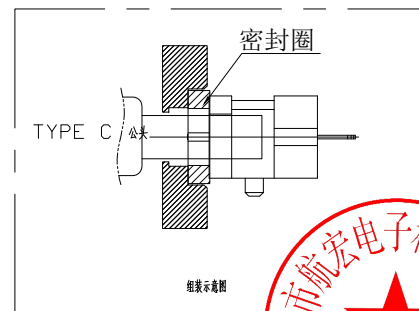

5	Shell2	1	SUS304 Ni Plating T=0.20mm	Ni:40~120u*;
4	Shell1	1	SUS304 Ni Plating T=0.3mm	Ni:40~120u*;
3	Housing2	1	LCP(G.F30%)	
2	Contact	4	Phosphor bronze_C5210R-EH Au/Ni Plating T=0.20mm	Ni:40~160u*; Au:CONTACT AREA:3u OTHER AREA:G/F
1	Housing	1	PA9T (G.F30%)	
ITEM	PARTNAME	Q'TY	FINISH	NOTE

DESIGN	MISS ZENG	SC ALL			TOLERANCE	ANGLES	品名: TYPE-C 型号: TYPE-C 2P 外接焊线式
DRAWIGN	MISS LI	ANIT	mm		.X. ±0.50	.X. ±2	
CHECK	Mr. ZENG	SIZE	A4 : 210*297		.X ±0.30	.X ±1	
APPROVAL		VERSION	01		.XX ±0.10	.XX ±0.5	
					.XXX ±0.05		



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.