
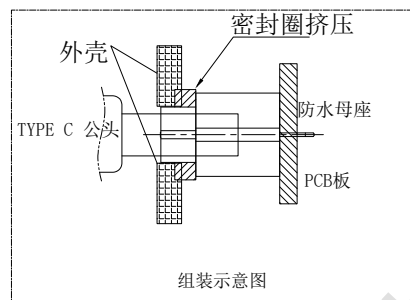


NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY:5000 CYCLES

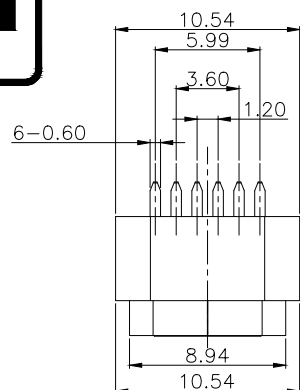

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

4	Shell1	1	SUS304 Ni Plating T=0.25mm	Ni:40~120u";
3	Housing2	1	LCP(G.F30%)	
2	Contact	5	Phosphor bronze_C5210R-EH Au/Ni Plating T=0.20mm	Ni:40~160u"; Au: CONTACT AREA: 3u", OTHER AREA: G/F
1	Housing	1	PA9T (G.F30%)	
ITEM	PART NAME	Q' TY	FINISH	NOTE

DESIGN	MISS ZENG	SC ALL		
DRAWIGN	MISS LI	ANIT	mm	
CHECK	Mr. ZENG	SIZE	A4 : 210*297	
APPROVAL		VERSION	01	

TOLERANCE	ANGLES
.X. ±0.50	.X. ±2
.X ±0.30	.X ±1
.XX ±0.10	.XX ±0.5
.XXX ±0.05	

品名: TYPE-C
型号: TYPE-C 6P 立式插板



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.