


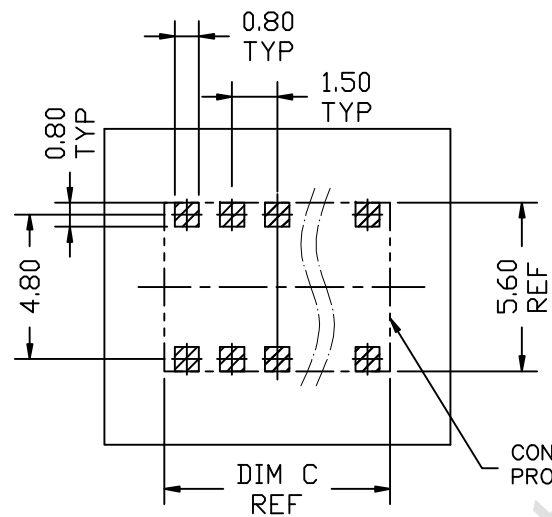

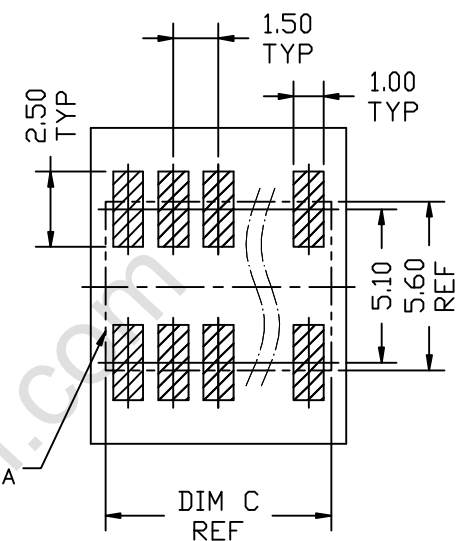


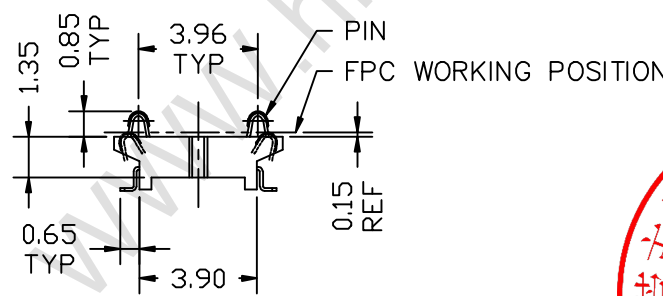

RECOMMENDED PCB LAYOUT
TOLERANCE: ± 0.10

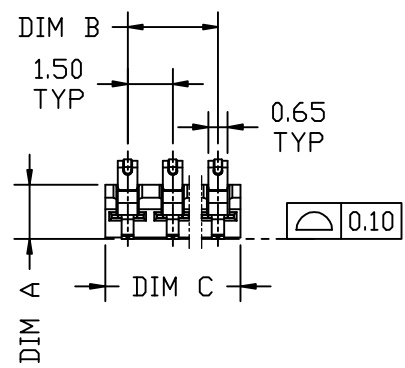


RECOMMENDED FPC LAYOUT
TOLERANCE: ± 0.10

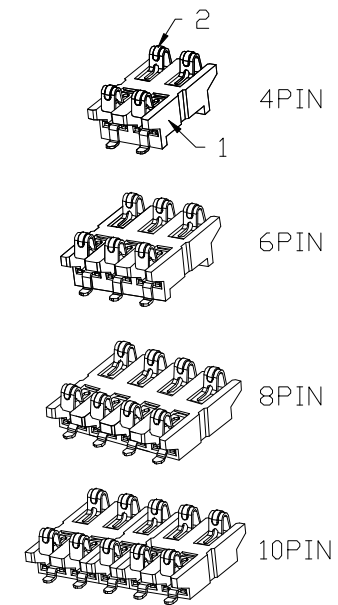

QUALITY SYMBOLS				
$\nabla=0$	$\nabla=0$	$\nabla=0$		
$\blacktriangledown$	MAJOR DIMENSION			
$\blacktriangledown$	CRITICAL DIM (CPK CONTROL)			
$\blacktriangledown$	CRITICAL DIM (SPC CONTROL)			

PART NO.	PIN	DIM A	DIM B	DIM C
140400	4	1.40	1.50	3.00
180400	4	1.80	1.50	3.00
200400	4	2.00	1.50	3.00
140600	6	1.40	3.00	4.50
180600	6	1.80	3.00	4.50
200600	6	2.00	3.00	4.50
140800	8	1.40	4.50	6.00
141000	10	1.40	6.00	7.50

NOTES:
1.PART DESCRIPTION SEE TABLE.
2.NO BURR AND TWIST APPEARS.
3.DETAIL FUNCTION REFER TO PRODUCT SPECIFICATION.

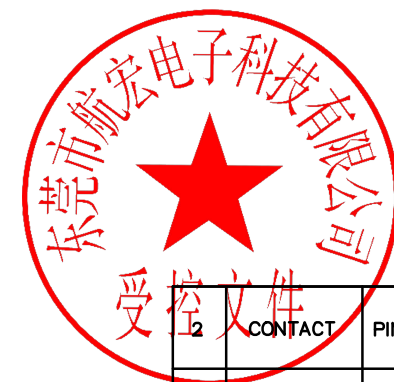

ITEM	DESCRIPTION	Q'Y	MATERIAL	FINISH
2	CONTACT	PIN	COPPER ALLOY THICKENSS=0.10mm	OVER ALL: Ni: 50u" CONTACT AREA: Au: 3u" SOLDER AREA: Au: 3u"
1	HOUSING	1	LCP 94V-0, BLACK	30% GLASS FILLED

DESIGN	MISS ZENG	SC ALL			TOLERANCE	ANGLES	品名:
DRAWIGN	MISS LI	ANIT	mm		X.XX ± 0.20	± 5	电池连接器
CHECK	Mr. ZENG	SIZE	A4 : 210*297				型号:
APPROVAL		VERSION	01				BHC15-140400



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.