

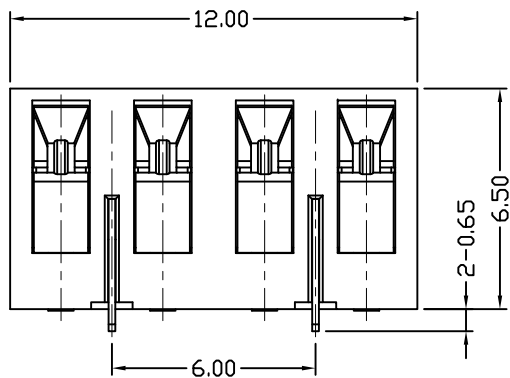
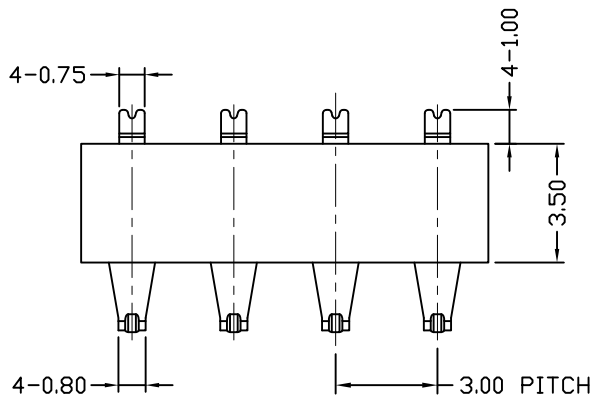
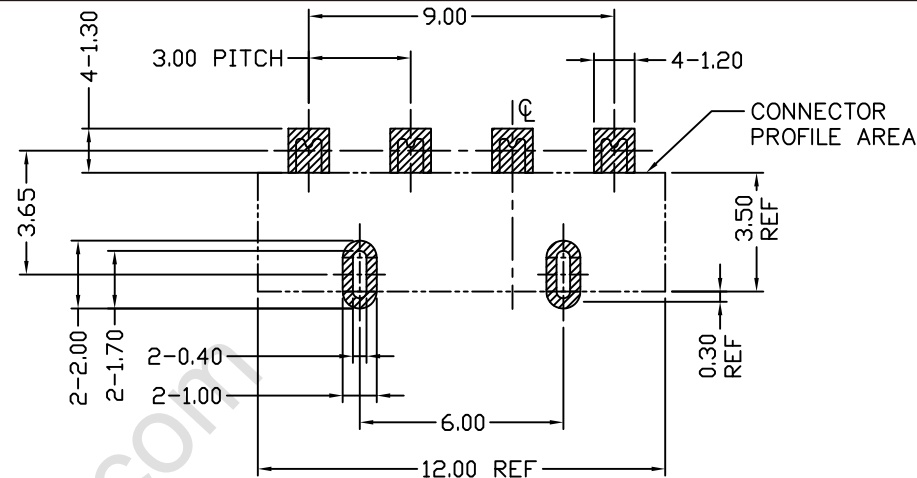


NOTES:
1.PART DESCRIPTION SEE TABLE.
2.NO BURR AND TWIST APPEARS.
3.DETAIL FUNCTION REFER TO PRODUCT SPECIFICATION.

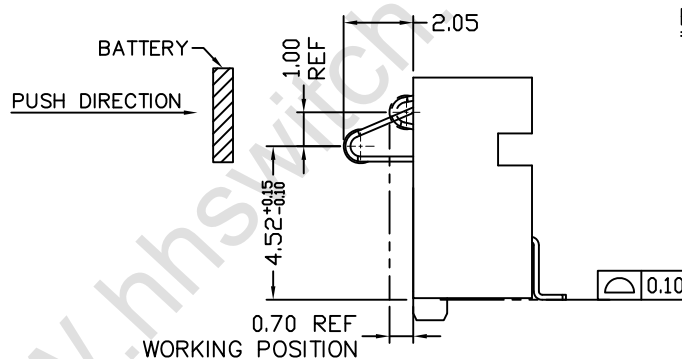

RECOMMENDED PCB LAYOUT
TOLERANCE: ± 0.05



QUALITY SYMBOLS

$\nabla=0$	$\nabla=0$	$\nabla=0$
∇	MAJOR DIMENSION	
∇	CRITICAL DIM (CPK CONTROL)	
∇	CRITICAL DIM (SPC CONTROL)	

3	PAD	2	COPPER ALLOY THICKNESS=0.20MM	OVER ALL: 50~80u" 镀底 ALL AREA: 80~120u" 雾锡
2	CONTACT	4	COPPER ALLOY THICKNESS=0.15MM	OVER ALL: 50~80u" 镀底 CONTACT AREA: 3~5u" 闪金 SOLDER AREA: 80~120u" 雾锡
1	HOUSING	1	LCP 94V-0, BLACK	30% GLASS FILLED
ITEM	DESCRIPTION	Q'Y	MATERIAL	FINISH

DESIGN	MISS ZENG	SC ALL			TOLERANCE	ANGLES	品名: 电池连接器 型号: BHC30-5650400
DRAWIGN	MISS LI	ANIT	mm		X.XXX ± 0.15	± 5	
CHECK	Mr. ZENG	SIZE	A4 : 210*297		X.XX ± 0.25		
APPROVAL		VERSION	01		X.X ± 0.38		



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.