

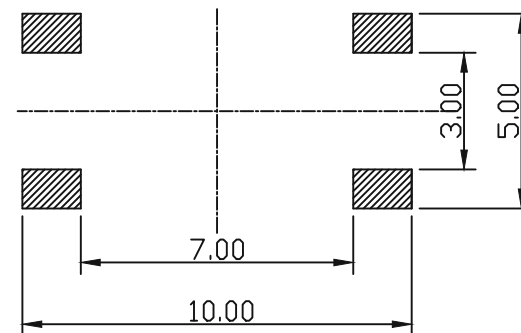
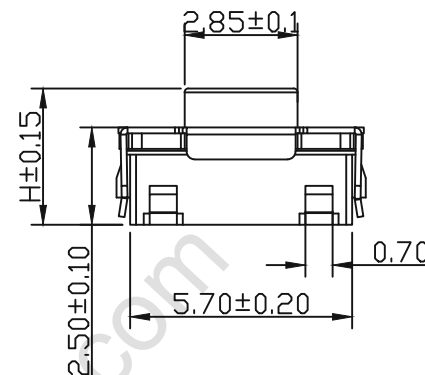
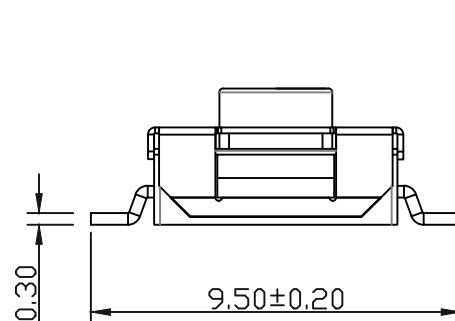
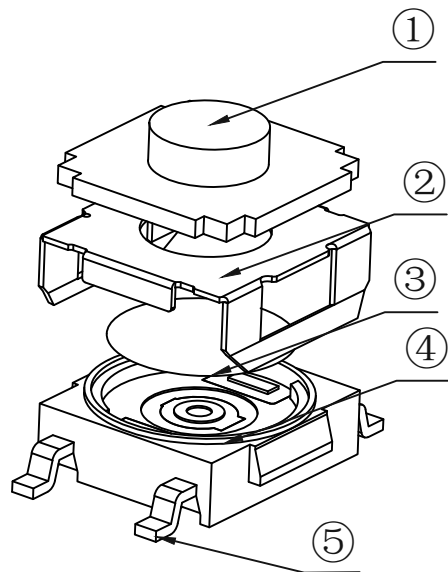



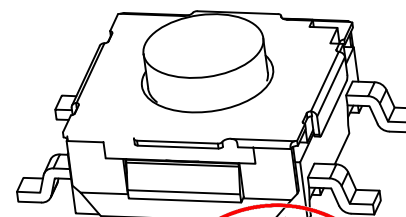


H	
3.1	3.5
3.8	4.3
4.5	4.8
5.2	5.5

主要技术规格:

1. 额定值: 50mA DC12V
2. 接触电阻: $\leq 50\text{m}\Omega$
3. 操作力: 180gf & $250 \pm 40\text{gf}$
4. 行程: $0.4 \pm 0.2\text{mm}$
5. 绝缘电阻: $\geq 100\text{M}\Omega$
6. 抗电强度: 250V 50HZ 1Min.
7. 寿命: 300,000 Cycles
8. 防水等级: IP67

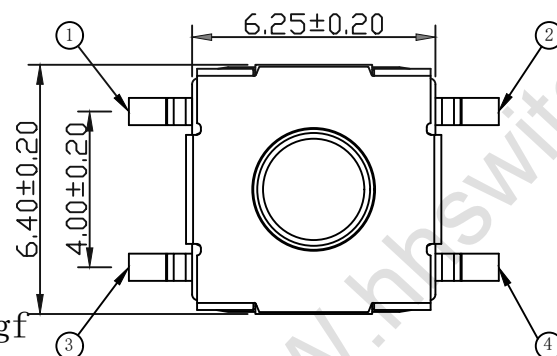

电路图



序号	零件名称	材料规格	数量	备注
5	引脚、触点	黄铜	1	镀银
4	底座	PPA	1	耐温280℃
3	簧片	不锈钢	1	覆银
2	盖板	冷轧钢	1	/
1	按钮	硅胶	1	耐温280℃

DESIGN	MISS ZENG	SC ALL			TOLERANCE	ANGLES	品名: 轻触开关 型号: 6.2*6.2 SMD 透明硅胶
DRAWIGN	MISS LI	ANIT	mm		>0.5-2 ±0.10	±0.5°	
CHECK	Mr. ZENG	SIZE	A4 : 210*297		>2-5 ±0.25		
APPROVAL		VERSION	01		>5-10 ±0.30		



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.