

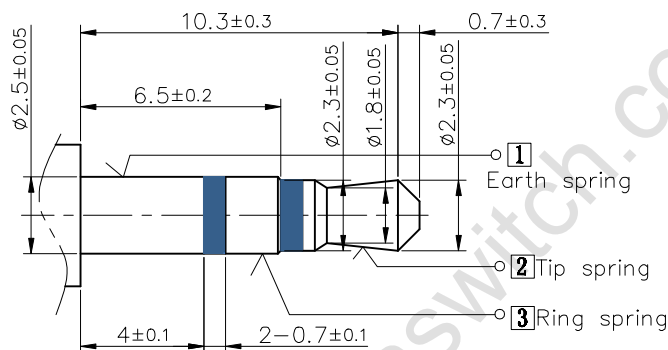
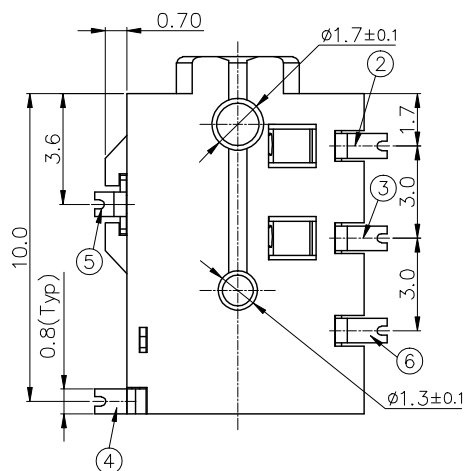
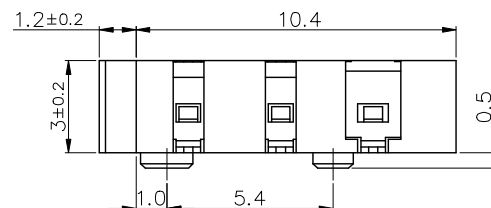


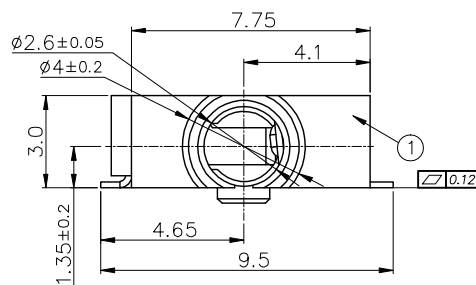

RECOMMENDED PLUG
Ø2.5 3-POLE STANDARD PLUG

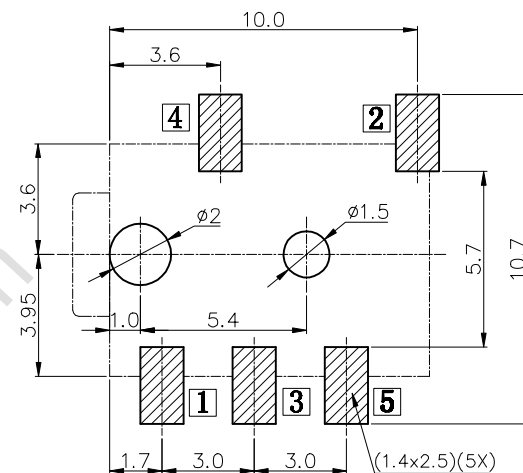

PCB HOLES(TOP VIEW) t=1.0mm
NOTE: GENERAL TOLERANCE: ±0.05mm

P/N	PJ-2521A	PJ-2521B	PJ-2521C
Schematic code			


□: Terminal No.

⑥	Shunt terminal-2	⑤	1	Copper Alloy t=0.20	Gold/Silver Plating
⑤	Shunt terminal-1	④	1	Copper Alloy t=0.20	Gold/Silver Plating
④	Tip spring	②	1	Copper Alloy t=0.20	Gold/Silver Plating
③	Ring spring	③	1	Copper Alloy t=0.20	Gold/Silver Plating
②	Earth spring	①	1	Copper Alloy t=0.20	Gold/Silver Plating
①	Housing		1	Hi-Tem. Thermoplastic	Black
NO.	DESCRIPTION	Q'TY	MATERIAL	REMARK	

DESIGN	MISS ZENG	SC ALL			TOLERANCE	ANGLES	品名:
DRAWIGN	MISS LI	ANIT	mm		.X ±0.50	X ±5	耳机插座
CHECK	Mr. ZENG	SIZE	A4 : 210*297		.XX ±0.30	.X ±3	型号:
APPROVAL		VERSION	01		.XXX ±0.15	.XXX ±2	PJ-2521A

Specification:

1. Rating : DC 30V 0.5A;
2. Contact resistance: ≤30mΩ;
After test: ≤50mΩ
3. Insulation resistance: ≥100MΩ (500VDC);
After test: ≥50MΩ
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3N~25N;
6. life test: 5000cycles min;
7. Operation temperature range: -20℃~70℃;
8. Preservation temperature range: -40℃~85℃;

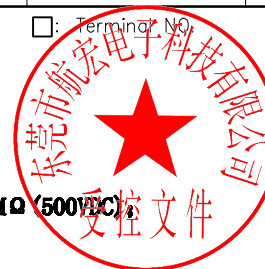

东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.