

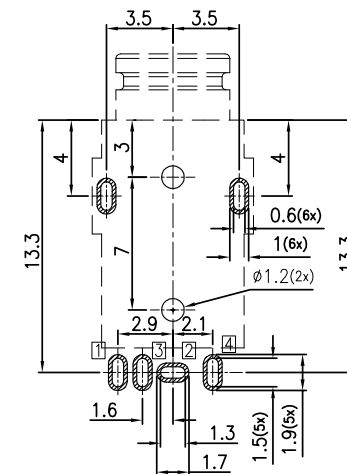
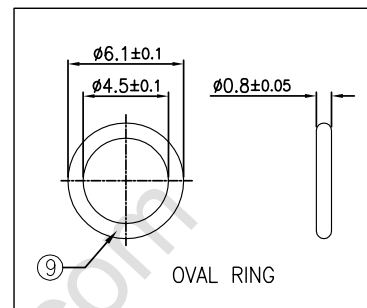
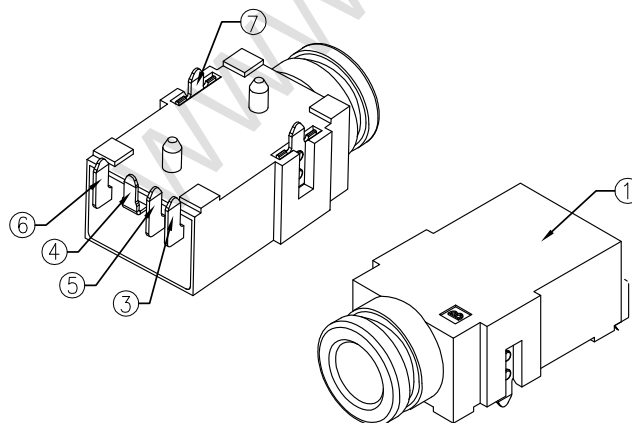
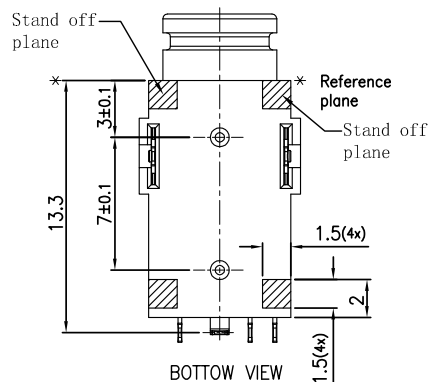



- SPECIFICATIONS:
- 1.RATING: 12V, 1A .
 - 2.CONTACT RESISTANCE:30mΩ OR LESSFOR INITIAL
 - 3.VOLTAGE PROOF:500V AC FOR ONE MINUTE
 - 4.DURABILITY:5,000 INSERTION/EXTRACTION CYCLES
 - 5.INSETION FORCE:3.0KG MAX
 - 6.WITHDRAWAL FORCE:0.3KG MIN
 - 7.WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX7(1m,30min)
 - 8.USING PLUG: Ø3.5MM、3-POLE STEREO
 9. OVAL RING
 - 9-1. Hardness of silicone rubber:70°
 - 9-2. Horizontal flash 0.10mm max;Longitudinal flash 0.10mm max
 - 10.HOUSING WITH O-RING'S SEAL AREA BURRS IS 0.05mm MAX.
 - 11.FOR REFLOW SOLDERING LEAD-FREE PROCESS.
 - 12.PACKAGING: TAPE & REEL.

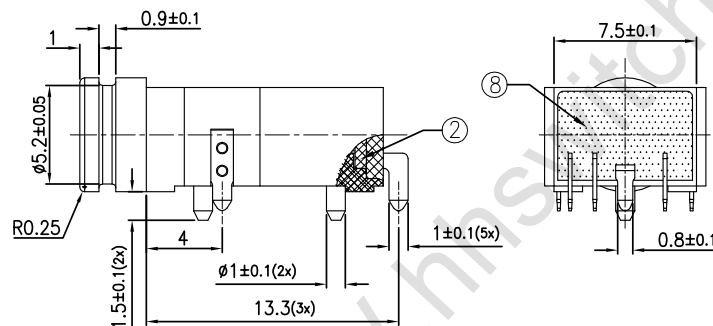

Recommended PCB Layout(T=1.2)
Tolerance: ±0.05(TOP view)



⑨	OVAL RING	----	1	SILICONE	GREEN
⑧	BOND	----	1	EPOXY	----
⑦	TERMINAL	----	2	C2680R-H T=0.2	Matte Sn 80u" Min; Ni 40u" Min underplate
⑥	TIP SPRING-2	④	1	C5210R-EH T=0.2	
⑤	RING SPRING	③	1	C5210R-EH T=0.2	
④	TIP SPRING-1	②	1	C5210R-EH T=0.2	
③	EARTH SPRING	①	1	C5210R-EH T=0.2	
②	COVER	----	1	PA9T+33%GF(GN2330)	UL 94V-0
①	HOUSING	----	1	PA9T+33%GF(GN2330)	UL 94V-0
ITEM	PART NAME	TERMINAL	QTY	MATERIAL	REMARK

DESIGN	MISS ZENG	SC ALL			TOLERANCE	ANGLES
DRAWIGN	MISS LI	ANIT	mm		±0.2	
CHECK	Mr. ZENG	SIZE	A4 : 210*297			
APPROVAL		VERSION	01			

品名: 耳机插座
型号: PJ-3434防水



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.