

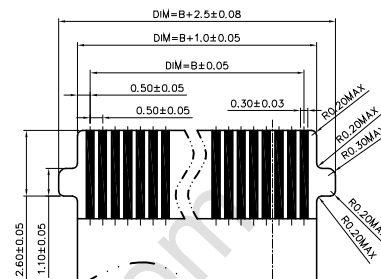




Electrical performance:
Current rating:0.5A AC,DC
Voltage rating:50V AV,DC
Contact resistance:20mΩ Max
Insulation resistance:500MΩ Min
Dielectric Strength:200V AC/rms
Temperature range:-40℃ ~ +105℃


NO.	NAME	MAT.L	FINISH
01	HOU	LCP UL94 V0	BEIGR
02	LATCH	LCP UL94 V0	BLACK
03	TERA	CuSn	NI AU
04	TERB	CuSn	NI AU
05	TAP	BRASS	NI SN



RECOMMENDED FPC/FFC

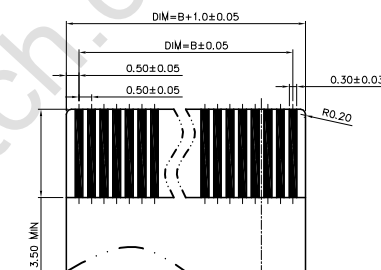

RECOMMENDED FPC/FFC

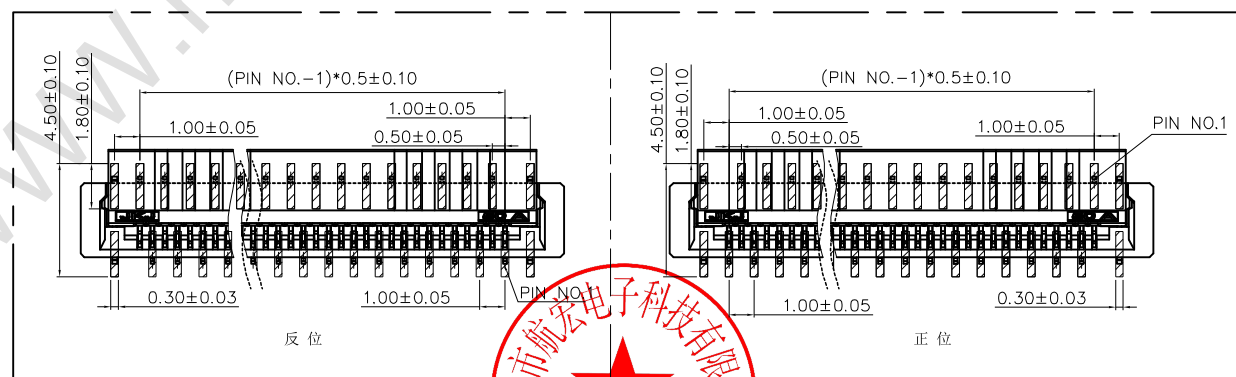

PC BOARD LAYOUT

焊片距1.0

PIN数	DIM=A	DIM=B	PIN数	DIM=A	DIM=B
4	6.20	1.50	33.00	20.70	16.00
5	6.70	2.00	34.00	21.20	16.50
6	7.20	2.50	35.00	21.70	17.00
7	7.70	3.00	36.00	22.20	17.50
8	8.20	3.50	37.00	22.70	18.00
9	8.70	4.00	38.00	23.20	18.50
10	9.20	4.50	39.00	23.70	19.00
11	9.70	5.00	40.00	24.20	19.50
12	10.20	5.50	41.00	24.70	20.00
13	10.70	6.00	42.00	25.20	20.50
14	11.20	6.50	43.00	25.70	21.00
15	11.70	7.00	44.00	26.20	21.50
16	12.20	7.50	45.00	26.70	22.00
17	12.70	8.00	46.00	27.20	22.50
18	13.20	8.50	47.00	27.70	23.00
19	13.70	9.00	48.00	28.20	23.50
20	14.20	9.50	49.00	28.70	24.00
21	14.70	10.00	50.00	29.20	24.50
22	15.20	10.50	51.00	29.70	25.00
23	15.70	11.00	52.00	30.20	25.50
24	16.20	11.50	53.00	30.70	26.00
25	16.70	12.00	54.00	31.20	26.50
26	17.20	12.50	55.00	31.70	27.00
27	17.70	13.00	56.00	32.20	27.50
28	18.20	13.50	57.00	32.70	28.00
29	18.70	14.00	58.00	33.20	28.50
30	19.20	14.50	59.00	33.70	29.00
31	19.70	15.00	60.00	34.20	29.50
32	20.20	15.50			

DESIGN	MISS ZENG	SC ALL		
DRAWIGN	MISS LI	ANIT	mm	
CHECK	Mr. ZENG	SIZE	A4 : 210*297	
APPROVAL		VERSION	01	

TOLERANCE	ANGLES
X. ±0.30	X. ±5.0°
.X ±0.25	.X ±3.0
.XX ±0.15	.XX ±2.0
.XXX ±0.10	

品名: FPC连接器
型号: FPC-0.5-30P翻盖立式



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.