
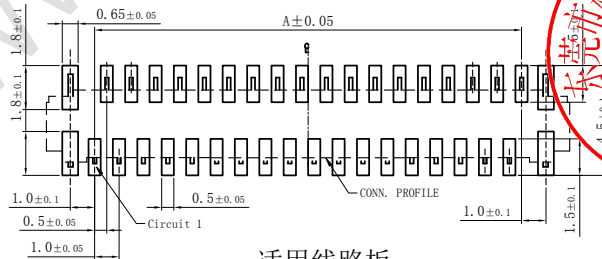



适用FPC寸法
APPLICABLE FPC



适用线路板
RECOMMENDED PCB LAYOUT

NOTES:

1. MATERIAL SEE TABLE;
2. PLATING SEE TABLE;
3. RATING
- 3-1. OPERATING TEMPERATURE: -40~85°C
- 3-2. OPERATING VOLTAGE: 50V AC/DC
- 3-3. CURRENT RATING: 0.5 AMPS
- 3-4. DIELECTRIC WITHSTANDING VOLTAGE:
200V AC/Minute;
- 3-5. INSULATION RESISTANCE: 500MΩ Min;
- 3-6. CONTACT RESISTANCE: 0.03Ω Max;

CKT	DIM A	DIM B	DIM C	DIM D	DIM F
10	4.5	5.56	8.5	6.9	4
12	5.5	6.56	9.5	7.9	4
14	6.5	7.56	10.5	8.9	4
15	7	8.06	11	9.4	4
16	7.5	8.56	11.5	9.9	4
24	11.5	12.56	15.5	13.9	8
30	14.5	15.56	18.5	16.9	8
32	15.5	16.56	19.5	17.9	8
36	17.5	18.56	21.5	19.9	8
40	19.5	20.56	23.5	21.9	8
50	24.5	25.56	28.5	26.9	8
60	29.5	30.56	33.5	31.9	8

焊片 Fitting Nail	磷青铜 Phosphor Bronze	2	电镀(锡): 整个表面镀底镍30u"MIN, 再镀锡80u"MIN.
锁扣 Actuator	PPS UL94V-0	1	紫色
端子 Contact	磷青铜 Phosphor Bronze	n×1	电镀: 整个表面镀底镍30u"MIN, 再功能点镀金3u"MIN.
基座 Housing	PA9T (UL94V-0)	1	棕色
名称	材料	数量	附注

DESIGN	MISS ZENG	SC ALL			TOLERANCE	ANGLES	品名:
DRAWIGN	MISS LI	ANIT	mm		X.X ±0.25	X. ±3	FPC连接器
CHECK	Mr. ZENG	SIZE	A4 : 210*297		X.XX ±0.12	X.X ±0.5	型号:
APPROVAL		VERSION	01		X.XXX ±0.05		FPC-0.5-40P-立式掀盖3.6H



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.