


装前塞示意图

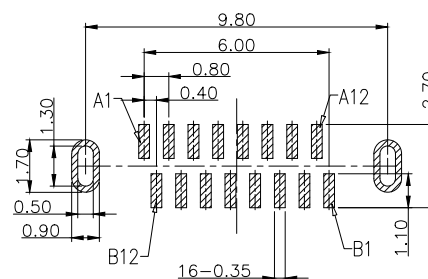

RECOMMEND P.C.B LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm







- NOTES:
- SPECIFICATION:
- 1.CURRENT RATING: 3.0 A
 - 2.VOLTAGE RATING: 3.0 V
 - 3.VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX
SHIELD: 50mΩ/MAX
LLCR MAX. CHANGE OF ALL PINS: 10Ωm
 - 4.INSULATION RESISTANCE: 100MΩ MIN
 - 5.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1MINUTE
 - 6.INSERTION FORCE: 0.5~2.0kgf
 - 7.UNMATING FORCE: 0.8-2.0kgf
 - 8.DURABILITY: 10000 CYCLES
 - 9.OPERATING TEMPERATURE: -35°C~+85°C
 - 10.THE PEAK TEMPERATURE ON THE BOARD SHALL
BE MAINTAINED FOR 10 SECONDS AT 210-230°C
 - 11.WATERPROOF:IP-X7.

USB TYPE C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

TABLE:

NO	PART	Q'TY	Material
1	PLASTIC SHELL	1	PA46 UL94 V-0 BLACK
2	CONTACT	16	C2680,TIN80u"/Au3u"/Ni30u"PLATED
3	MID PLATE	1	SUS301,NO PLATING
4	HOUSING	1	LCP UL94 V-0 BLACK
5	SHIELDING PLATE	1	SUS,NI PLATED
6	WATERPROOF RING	1	SILICONE UL94 V-0 RED
7	CAP	1	LCP UL94 V-0 BLACK

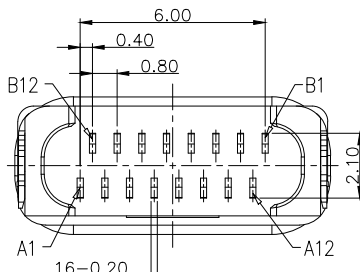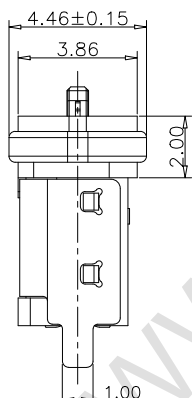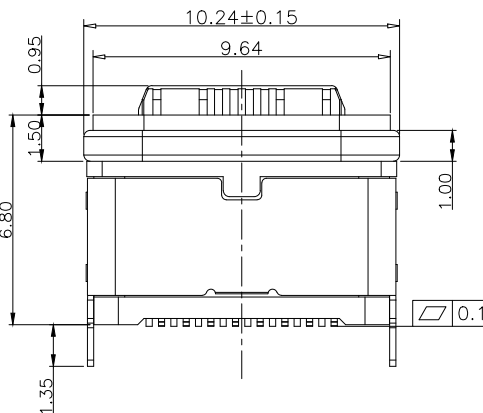


DESIGN	MISS ZENG	SC ALL			TOLERANCE	ANGLES
DRAWIGN	MISS LI	ANIT	mm			
CHECK	Mr. ZENG	SIZE	A4 : 210*297			
APPROVAL		VERSION	01			



品名 : TYPE-C连接器
型号 TYPE-C 16P 防水母座立式贴板
H=6.8mm U型全塑款



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.

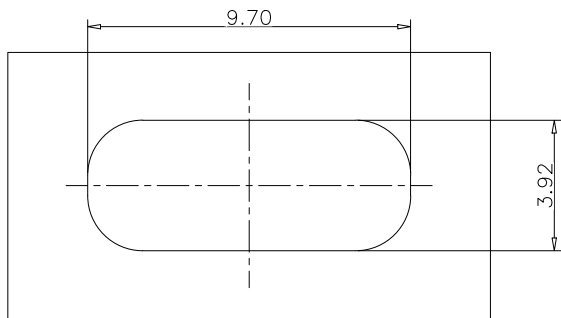

密封开孔参考尺寸(只供参考)
组装外壳时需要打环保润滑油

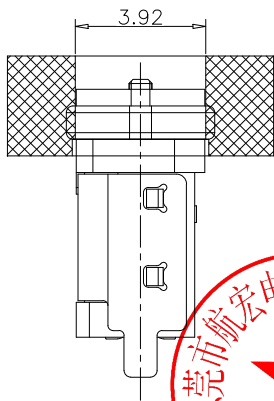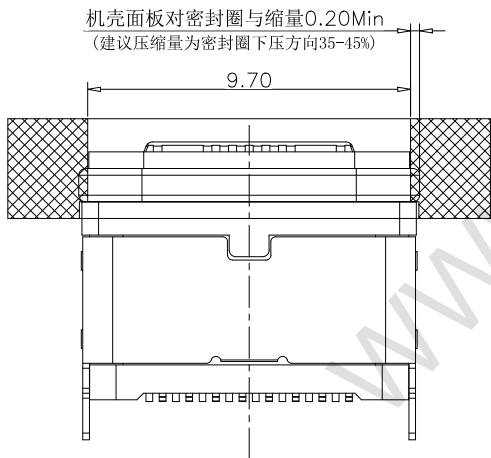

DESIGN	MISS ZENG	SC ALL			TOLERANCE	ANGLES	品名：
DRAWIGN	MISS LI	ANIT	mm				TYPE-C连接器
CHECK	Mr. ZENG	SIZE	A4 : 210*297				型号：TYPE-C 16P 防水母座立式贴板
APPROVAL		VERSION	01				H=6.8mm U型全塑款



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.