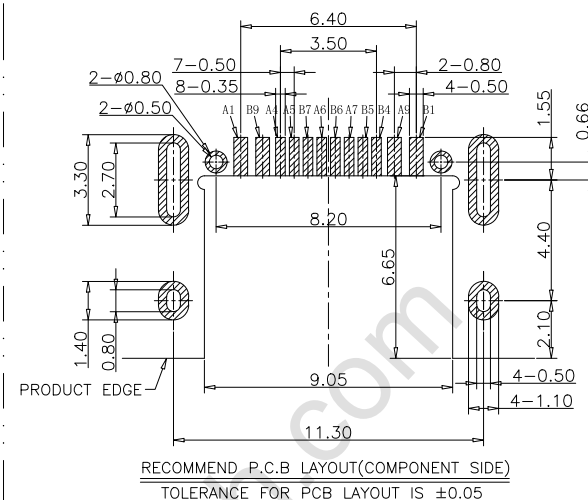
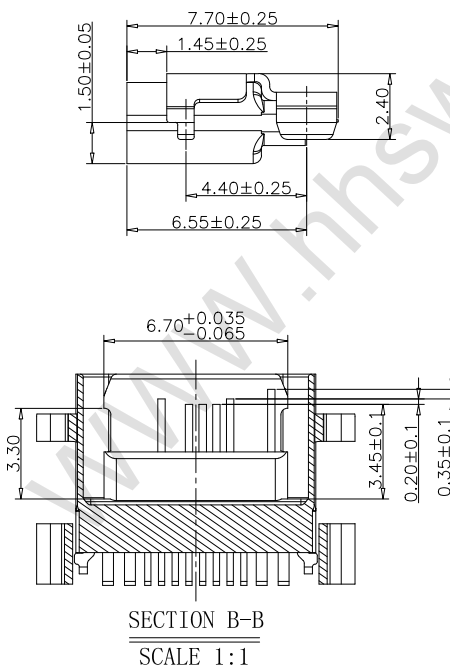
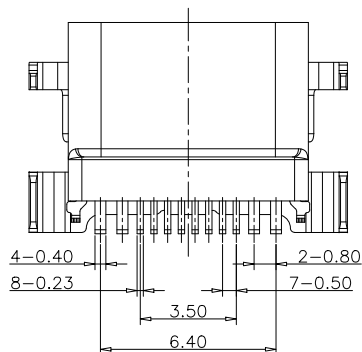
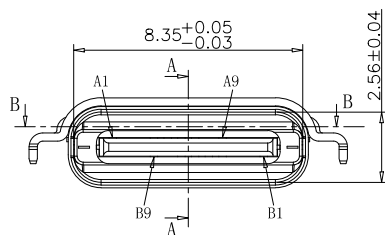
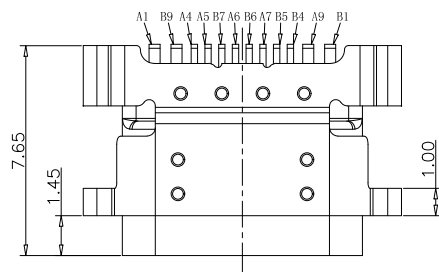
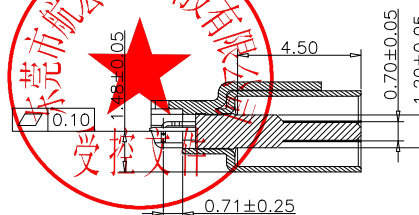


TABLE:

NO	PART	Q'TY	Material
1	SHELL-1	1	STAINLESS STEEL, Ni PLATED 30u"Min
2	SHELL-2	1	STAINLESS STEEL, Ni PLATED 30u"Min
3	CONTACT	12	COPPER STEEL, Ni 50u"Min; Au u"
4	MID-PLATE	1	STAINLESS STEEL, NO PLATING
5	MID-HOUSING	1	HIGH TEMPERATURE RESISTANT PLASTIC BLACK UL94 V-0

SECTION A-A
SCALE 1:1

备注 (NOTE):

1. 电气特性:

1.1. 接触区: 接触电阻40mΩ Max, 允许10mΩ变化量. 测试条件: 20mv, 100mA下测量.

1.2. 接触电流: 3A VBUS引脚; 1.25A用于GND引脚; 其他引脚为0.25A.

1.3. 额定电压: 30V.

1.4. 耐电压: 100VR. M. S.

1.5. 绝缘电阻: 至少100兆欧.

2. 机械性能:

3.1. 插入力: 0.51-2.04Kg

3.2. 拔出力: 0.82-2.04Kg

3.3. 耐久性: 0.61-2.04Kg

3.4. 插拔次数: 10000次.

4. 可焊性: 温度210-230℃, 时间10秒.

5. 工作环境: -20℃ to +85℃.

USB TYPE C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B9	VBUS
A4	VBUS		
A5	CC1		
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
		B5	CC2
A9	VBUS	B4	VBUS
		B1	GND

DESIGN	MISS ZENG	SC ALL			TOLERANCE	ANGLES
DRAWING	MISS LI	ANIT	mm			
CHECK	Mr. ZENG	SIZE	A4 : 210*297			
APPROVAL		VERSION	01			

品名: TYPE-C连接器
型号: TYPE-C 12P 母座防水拉伸壳
四脚护套L=7.65MM



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.